


GSD

845-8-5

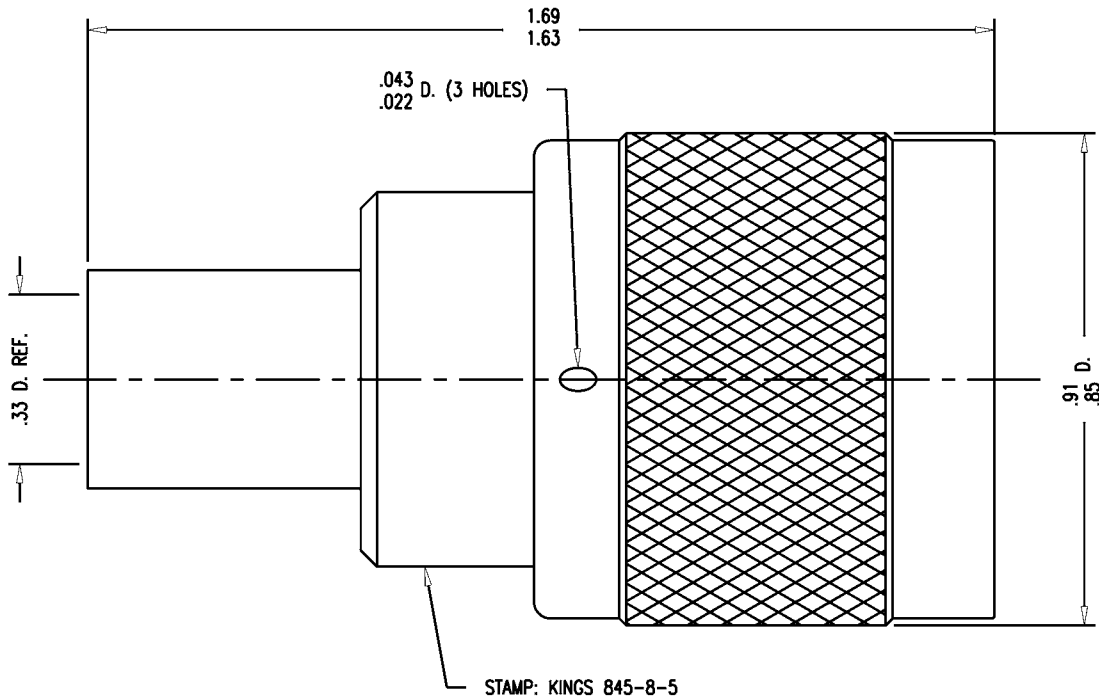

NOTES:

1. FOR USE WITH MC AIR ST5M1398-001, 002 & 003 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-597.
3. FOR CABLE TRIMMING USE KTJ-191, KTD-234 & KTF-5.
4. FOR CRIMPING USE DIE KTH-2005.
5. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
6. INTERFACE PER MIL-STD-348, FIG. 317-1.
7. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - GASKET: SIL. RUB., ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
 - C-RING: PHOS. BRONZE, ASTM-B-103
 - OUTER CONTACT: BER. COP., ASTM-B-196
 - ALL OTHER PARTS: BRASS, ASTM-B16
8. FINISHES:
 - ALL METAL PARTS: SILVER PLATE PER QQ-S-365
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 1500 VRMS
 - FREQUENCY RANGE: DC TO 4 GHz

REVISIONS

ISSUE	CHANGES
0	ER 35592 KH 02/03/95

KAM5264

SCALE	4:1		
APPROX SURFACE AREA			
SUPERSIDES	845-7-5		
USED ON			
REF:	MCDONNELL AIRCRAFT #5M1988-003 REV. C		
PLUG, HN			
DRAWN	KH	DATE	02/03/95
DESIGN	LI	DATE	02/06/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

845-8-5

GSD