

COAXIAL RESONATOR OSCILLATOR

SURFACE MOUNT MODEL: SYN2219N





ULTRA LOW-NOISE

2219 ±3 MHz

SPECIFICATIONS

Oscillator Center Frequency:	2219 ±3 MHz	SSB Phase Noise: @25°C (Max)	
Tuning Voltage:	1 to 8 V (Max)	@ 1 kHz offset	-84 dBc/Hz
Tuning Sensitivity:	3 to 4 MHz/V (Typ)	@ 10 kHz offset	-110 dBc/Hz
Output Power:	2 dBm ±2dB	@ 100 kHz offset	-127 dBc/Hz
Bias Voltage:	8 VDC @ 30mA	Pulling:	2 MHz @ 1.75:1 VSWR
Harmonic Suppression:	10 dBc (Typ)	Pushing:	1 MHz/V(Typ)
		Operating Temp. Range:	-20° to +70°C

MECHANICAL OUTLINE: 165SL

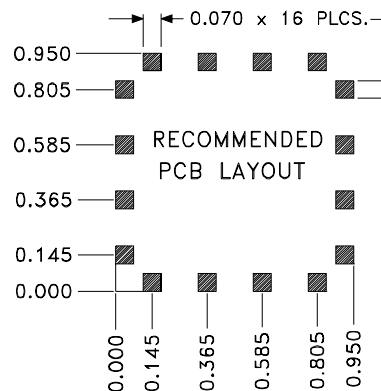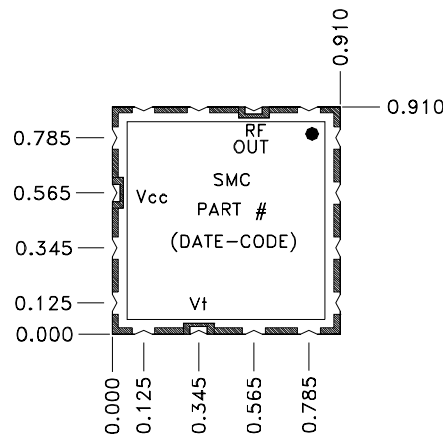


COAXIAL RESONATOR OSCILLATOR SURFACE MOUNT MODEL: SYN2219N

ULTRA LOW-NOISE

2219 ±3 MHz

PERFORMANCE PLOTS


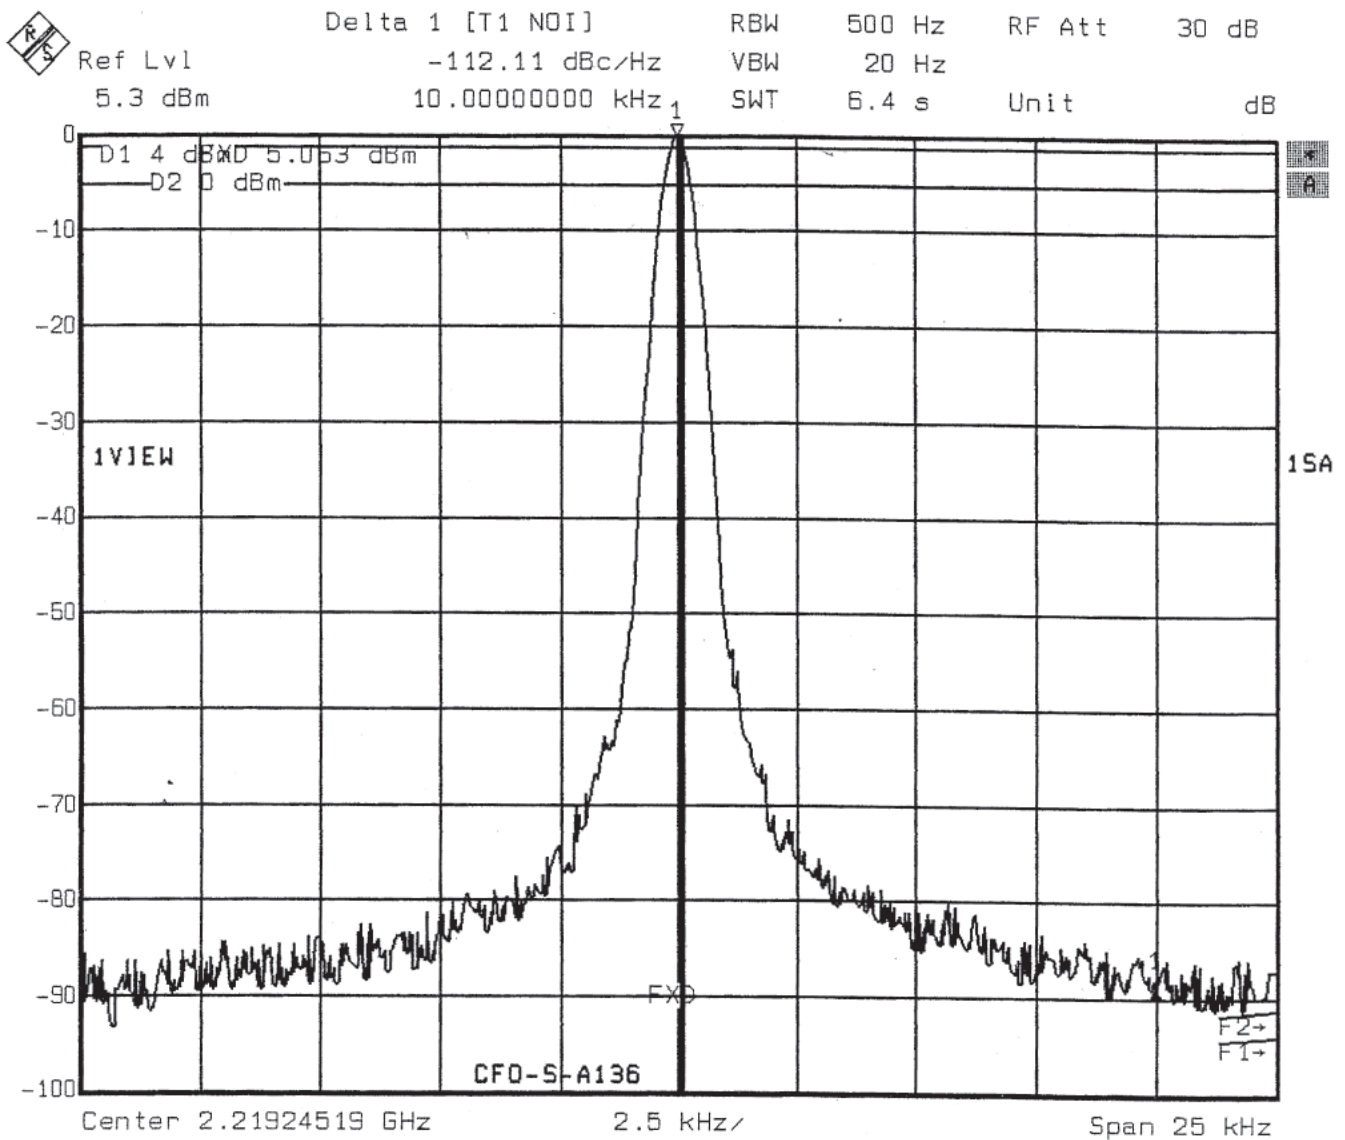


COAXIAL RESONATOR OSCILLATOR SURFACE MOUNT MODEL: SYN2219N

ULTRA LOW-NOISE

2219 ±3 MHz

PERFORMANCE PLOTS

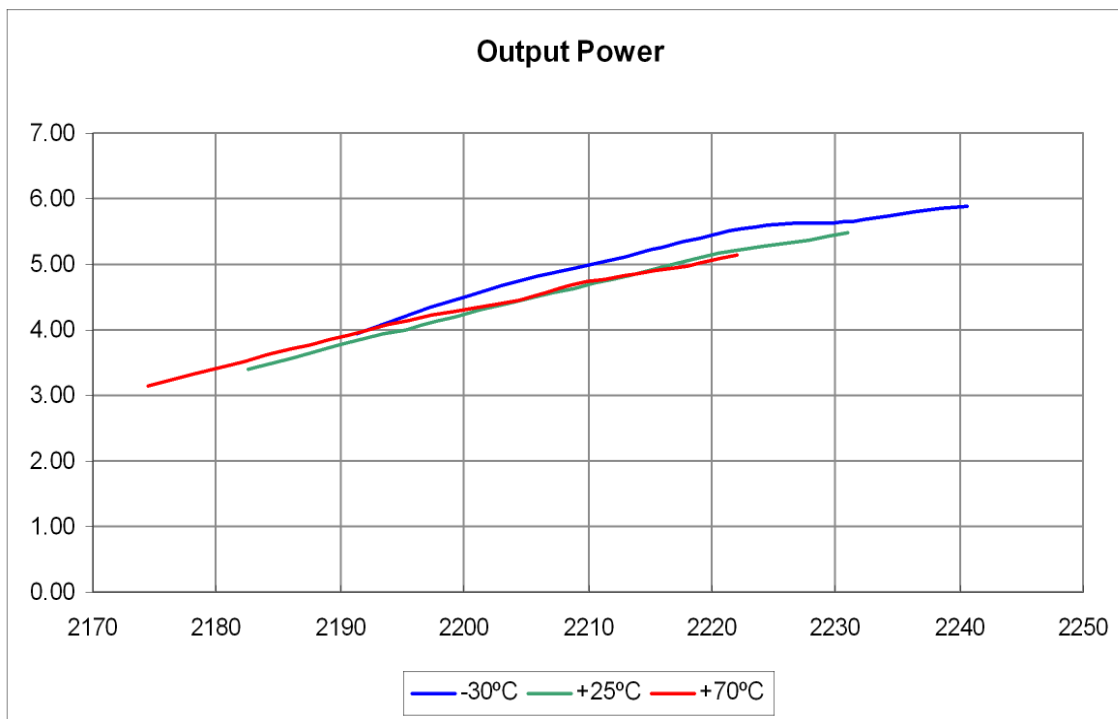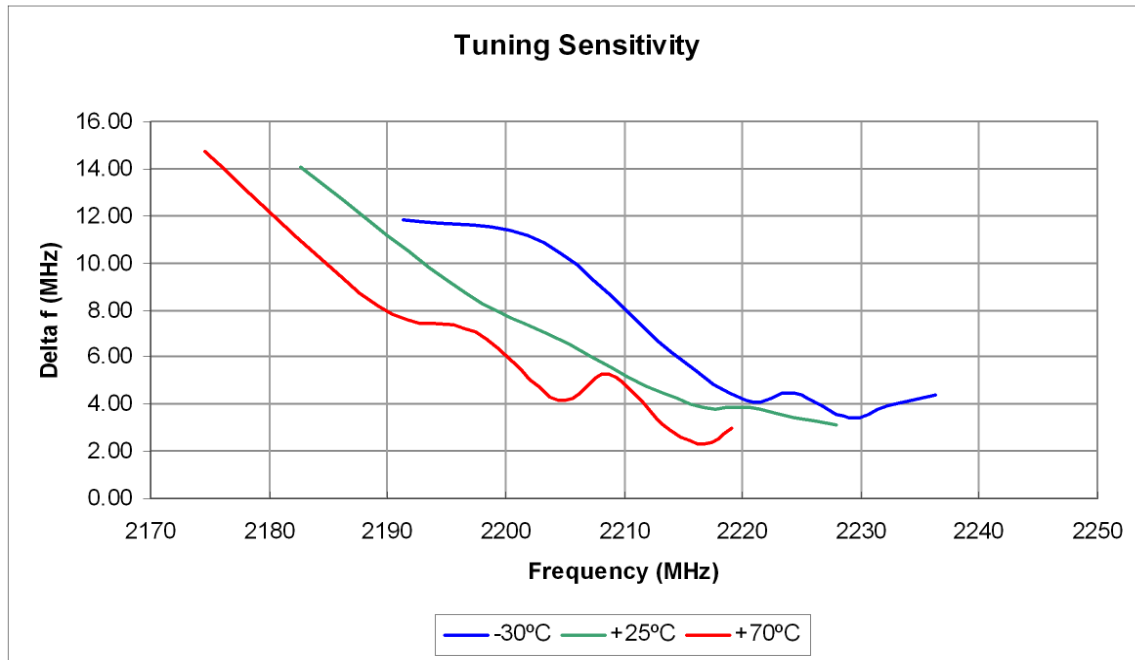

COAXIAL RESONATOR OSCILLATOR SURFACE MOUNT MODEL: SYN2219N

ULTRA LOW-NOISE

2219 ±3 MHz

