
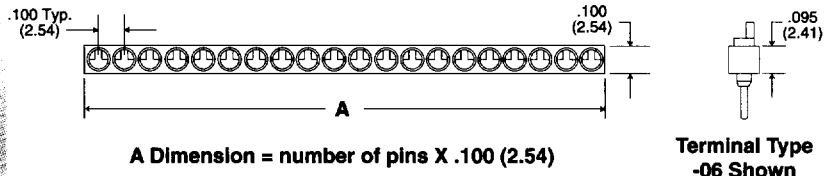


Single In-line Solid Adapter Strips

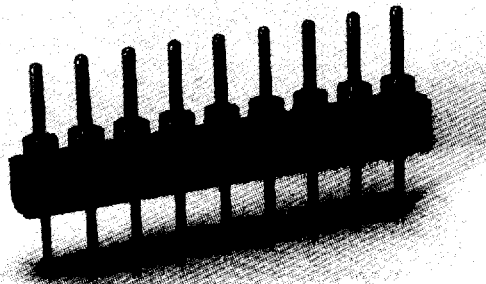

Features:

- Molded in lengths 3 - 20, 30 & 32.
For other lengths consult factory.
- .100" (2.54mm) pin to pin spacing.
- Board to board applications.
- Highly reliable method of interconnecting.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360,
ASTM-B-16

Plating:


Terminal: Gold over Nickel or
Tin-Lead over Nickel

Body Material:


NA - Glass Filled Thermoplastic
Polyester (P.B.T.) U.L. Rated 94V-O,
-60°C to 140°C (-76°F to 284°F)

HNA - High Temp. Glass Filled
Thermoplastic, U.L. Rated 94V-O,
-60°C to 260°C (-76°F to 500°F)


Type -06

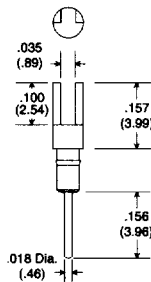


Type -07




Type -08




Type -09

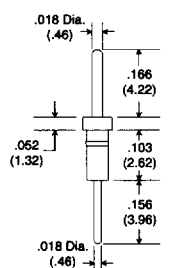


Type -68

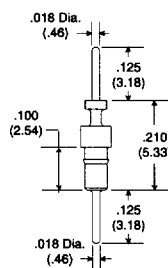


Type -43

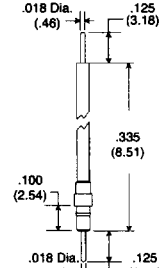


Type -399

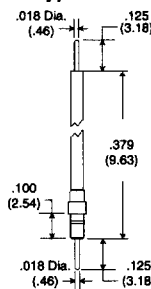


Type -185

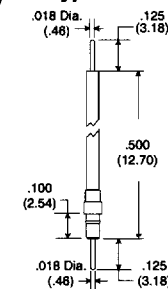


Type -42

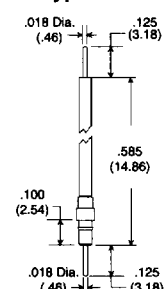


Type -398

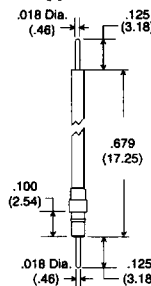

Type -403

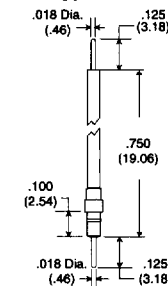

Type -71

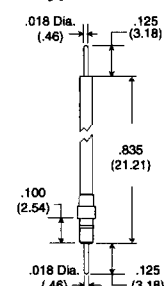

How To Order

Body Type **NA** **020** **-06** **T** **Terminal Plating**
 NA - Solid SIP Adapter
 HNA - High Temp. Solid SIP Adapter
Number of Pins **3** - 20, 30 & 32 Position Strips Available. For other lengths, consult factory.
Terminal Type **G** - Gold
T - Tin-Lead



Quick turn delivery available on standard terminal types.

Additional terminal types available. See terminal section for detailed terminal information.