


GSD

KC-99-52

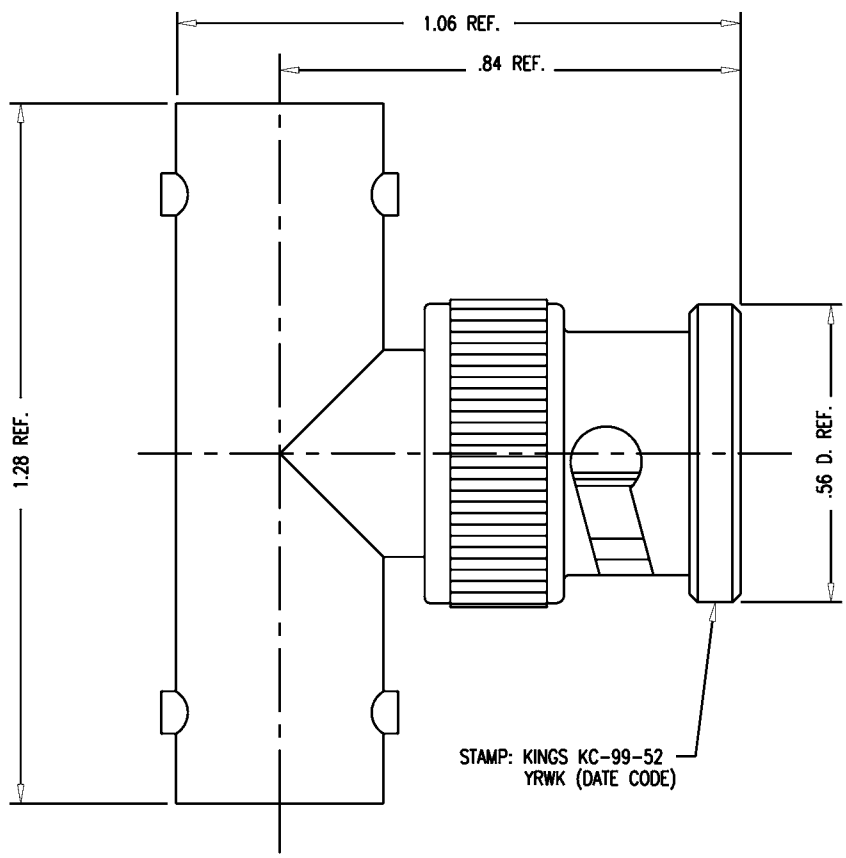

NOTES:

1. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-1457
 GASKET: SIL. RUB., QQ-R-765
 OUTER CONTACT: PHOS. BRONZE, QQ-B-750
 SPRING WASHER }
 CONTACT F } BER. COP., ASTM-D-196
 ALL OTHER PARTS: BRASS, ASTM-B16
2. FINISHES:
 CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
 SPRING WASHER }
 CAM LEVER } SILVER PLATE PER QQ-S-365
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
3. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VRMS
 FREQUENCY RANGE: DC TO 4 GHz

REVISIONS

ISSUE	CHANGES
0	ER 8689 WLA 07/10/70
1	CN 13259 A WD 03/18/74
2	CN 16808 C JHP 01/26/77
3	CN 26730 C AJ 09/23/85
4	CN 27716 C CT 12/19/85
5	CN 30559 C JCA 02/24/89
6	CN 37975 E REDRAWN TML 02/14/00
7	CN 38007 E TML 06/09/00

KC9952S

SCALE	4:1		
APPROX SURFACE AREA			
USED ON			
REF:			
ADPT, F-M-F, TEE, BNC			
DRAWN	PW	DATE	07/09/70
DESIGN	LJ	DATE	07/10/70
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-99-52

GSD