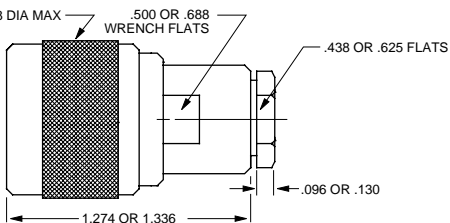
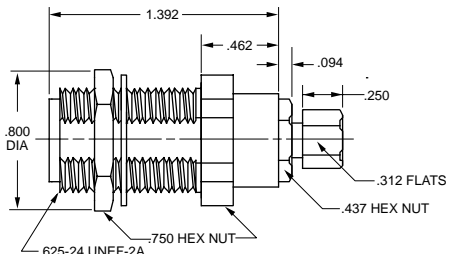

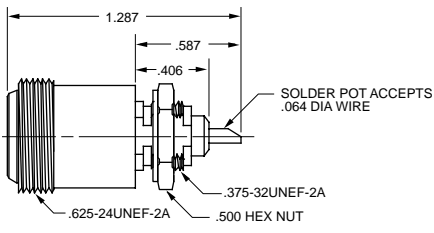

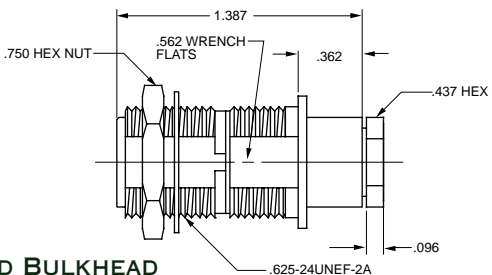
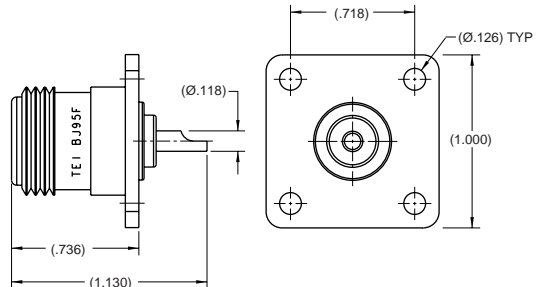
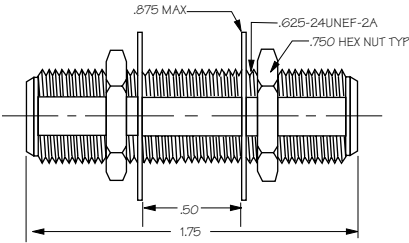


COAX "N" CONNECTORS, 90 SERIES

Trompeter's 90 Series incorporates many of the features of our BNC lines including 3-piece wrench crimp configuration, gold plated captive center contacts, beryllium copper female contacts, and PTFE dielectrics. The 90 Series will also accommodate nonflammable plenum coax cables.

<p><i>PL95-1 and -6 Shown</i></p>  <p>CABLE PLUG WRENCH CRIMP</p> <p>50Ω 75Ω</p> <p>PL95-[△] UPL95-[△]</p> <p>Large body versions are available, contact the factory. Size depends on cable group.</p>	<p><i>BJ95-141 Shown</i></p>  <p>BULKHEAD CABLE JACK WRENCH CRIMP</p> <p>50Ω 75Ω</p> <p>BJ95-[△] UBJ95-[△]</p> <p>Mounting Holes: DD4.310 (Standard body) DD1.310 (Cable Groups -6A/6B/6E, -48, -50)</p>
 <p>ADAPTER N TO BNC</p> <p>50Ω 75Ω</p> <p>AD95 UAD95</p> <p>Mounting Hole: DD4.310</p>	 <p>BULKHEAD JACK SOLDER POT</p> <p>50Ω 75Ω</p> <p>J95 UJ95</p> <p>Mounting Hole: D5.310</p>
 <p>INSULATED ADAPTER N TO BNC</p> <p>50Ω 75Ω</p> <p>ADI95 UADI95</p> <p>Mounting Hole: DD4.203</p>	<p><i>BJ96-1 Shown</i></p>  <p>INSULATED BULKHEAD CABLE JACK WRENCH CRIMP</p> <p>50Ω 75Ω</p> <p>BJ96-[△] UBJ96-[△]</p> <p>Mounting Hole: DD4.203</p>
 <p>FLANGE MOUNT BULKHEAD JACK N, SOLDER POT</p> <p>50Ω 75Ω</p> <p>BJ95F UJ95F (Not Shown)</p>	<p><i>BJ98-2 Shown</i></p>  <p>FEED-THRU JACK</p> <p>50Ω 75Ω</p> <p>BJ98-2 UBJ98-2</p> <p>Mounting Hole: DD4.50 For panels up to 2.25" thick, For thicker panels call the factory</p>

[△] - Refers to Cable Group Table, see pages 68-88. "D" mounting holes are on page 45.

COAX "N" CONNECTORS, 90 SERIES

Trompeter's "N" Connector Series are utilized for interconnection on antenna towers, lightning protection boxes, power distribution and ancillary systems. Trompeter offers a complete line of remarkable new 50Ω "N" connectors for current industry standard flexible and corrugated cables.

"N" TYPE BULKHEAD JACK
Panel Thk: .250

50Ω **BJ92**

105-1636-(See Chart)

DASH NO.	CABLE ACCOMMODATED	A	B	C	L
-1	TIMES LMR-400	.750	.750	.625	1.627
-2	TIMES LMR-500	1.00	1.00	.875	1.687
-3	TIMES LMR-600	1.00	1.00	.875	1.687

CABLE PLUGS
WRENCH CRIMP (FOR PART NUMBERS SEE DRAWINGS)

RIGHT ANGLE CIRCUIT BOARD JACK
TYPE "N" COAXIAL BULKHEAD
MOUNT RECEPTACLE

50Ω **CBBJR99**
DD4.310

105-1663 -1 Shown

105-1663-2/-12 Shown

RIGHT ANGLE "N"
FOR AIRBORNE APPLICATIONS

CABLE PLUG
RIGHT ANGLE, WRENCH CRIMP
FOR RG393
SAFETY WIRE VERSION

105-1374-1
105-1374-S1

PIC WIRE & CABLE S33141
SAFETY WIRE VERSION

105-1374-2
105-1374-S2

For other cables, 75Ω, or TNC versions contact the factory.

105-1663-3 Shown

DASH NO.	CABLE ACCOMMODATED
105-1663-1	FLC38-50J
105-1663-2	FLC12-50J
105-1663-3	FLC78-50J
105-1663-12	FLC12-50J

Cable group table, see pages 68-88.