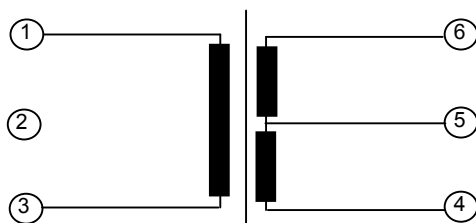


recommended frequency range: 5MHz – 50 MHz
Winding Table:


winding	begin	end	turns	wire
I	1	3	3	Ø 0,1 mm, grade 2 / uncoloured
II	4	5	3	Ø 0.1 mm, grade 2 / red
III	5	6	3	Ø 0,1 mm, grade 2 / red


Circuit diagram of balun:

Test arrangement for balun:

Measurement instrument: Network Analyser

Test platina: BA501

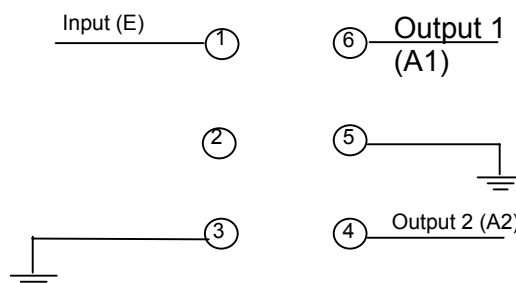Impedance: 50 Ω

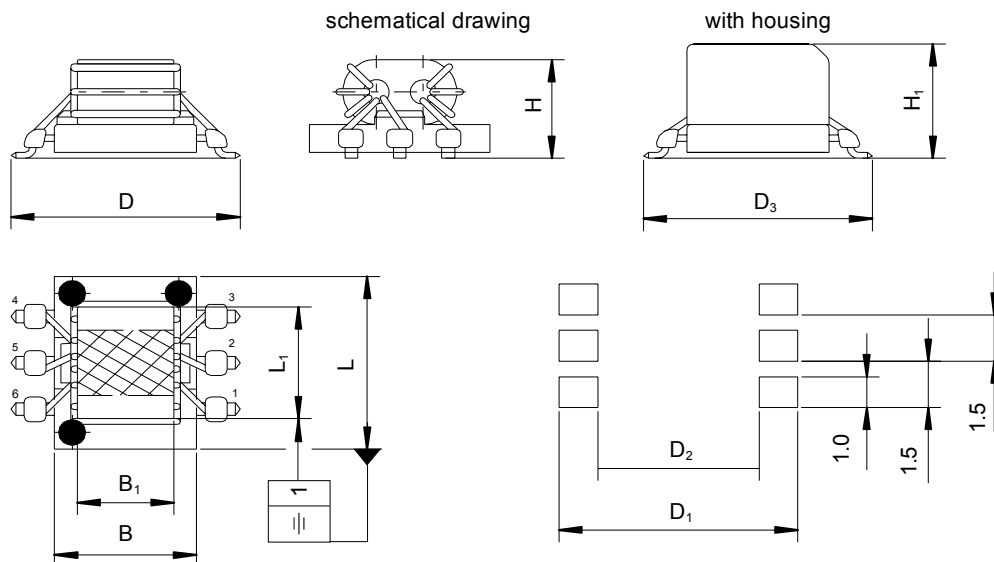

recommended frequency range: 5MHz – 50 MHz
Dimensions and Layout:

Dimensions (mm):

L	L ₁	B	B ₁	H	H ₁	D	D ₁	D ₂	D ₃
5,6 _{-0,1}	3,6	4,5 _{-0,1}	3	3,4 ¹⁾	3,9 ¹⁾	6,9 ¹⁾	7,3	5,1	7,1 ¹⁾

¹⁾ max. dimensions

Without housing
Packing:

Packaging unit: 2.100 pieces/reel

Packaging into blister tape acc. DIN IEC 286-3

blister tape 12 mm on reel 330 mm

Coplanarity < 0,2mm

© EPCOS AG 2003. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the inform contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.