


FLEXIBLE BUS ASSEMBLY

6550

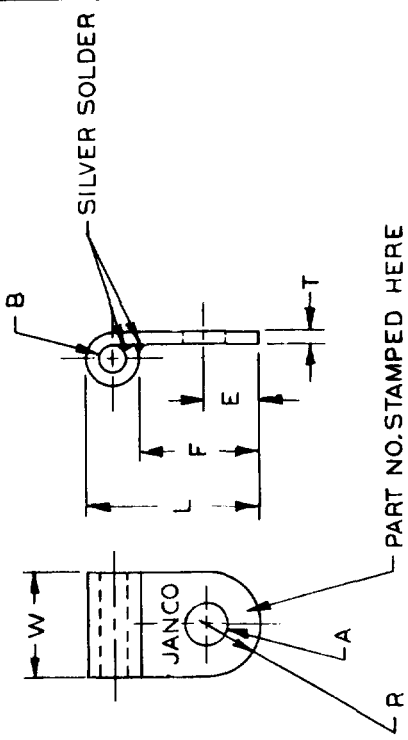

FINISH: ELECTED TIN PLATE MIN. .0003 THICK.
SEE QQ-P-416-(1)

PART NO.	SCREW SIZE	A.W.G.		DIMENSIONS & TOLERANCES				TOOL NO.	L'DIM AFTER STAKING MAX	WGT. IN GRAMS	
		TOL.	TOL.	TOL.	TOL.	TOL.	TOL.				
6550-5	8-10	14-16	.330	.695	.032	.536	.169	.165	T-524	.725	1.4
	4-6	14-16	.330	.695	.032	.536	.169	.165	T-311	.725	1.4
	8-10	10-12	.330	.695	.032	.504	.169	.165	T-397	.725	1.5
	8-10	10-12	.500	1.096	.032	.904	.250	.250	T-248	1.130	3.4
	8-10	8-10	.500	.895	.032	.650	.250	.250	T-941	.935	3.1
	8-10	6-8	.500	.775	.064	.453	.200	.250	T-1367	.830	5.6
	8-10	6-8	.500	.819	.064	.510	.255	.250	T-119	.860	5.7
	1/4	6-8	.500	.819	.064	.510	.255	.250	T-91	.860	5.7
	1/4	6-8	.500	.970	.064	.660	.255	.250	T-951	1.035	6.4

REQ'D.	6550-()	SOFT COPPER	QQ-C-576a	UNIT WT.
	PART NO.	DESCRIPTION	MATL.	MATL. SPEC.

TITLE		FLAG TERMINAL	
DATE	7-18-52	DATE	7-18-52
CHECK	JMN	DATE	7-18-52
APPROVE		SCALE	NONE B SIZE

GK	7-18-52	DATE	7-18-52
DRAWN	JMN	DATE	7-18-52
CHECK	JMN	DATE	7-18-52
APPROVE		DATE	

UNLESS OTHERWISE SPECIFIED	NOTED
DIMENSIONS ARE IN INCHES	NOTED
TOLERANCES ON FRACTIONS	NOTED
TOLERANCES ON DECIMALS	NOTED
ANGLES	NOTED
SPECIFICATION	NOTED
HEAT TREAT	NOTED

APPLICATION	QUANTITY	REQ'D.
NEXT ASY	NEXT ASY	FINAL ASY

JANCO CORPORATION
3111 WINONA AVE
BURBANK,
CALIFORNIA

DRAWING NO. 6550