


Computer Components, Inc.


P/N: 400-556-5

Sketch: (not to scale)

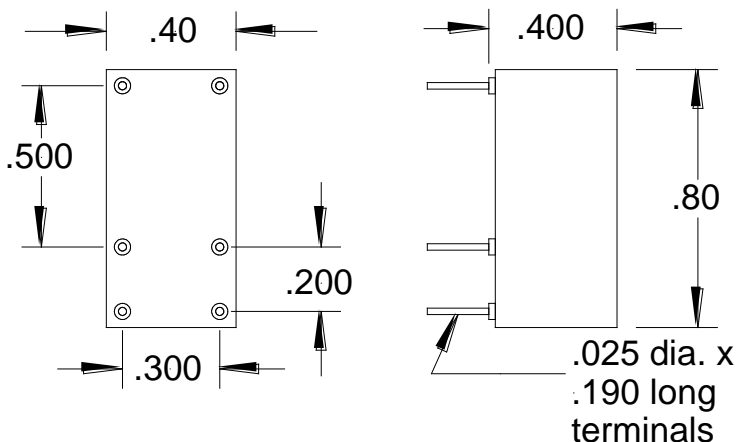

Tolerances: .XXX = ± .010
.XX = ± .020

Circuit Diagram: (bottom view)

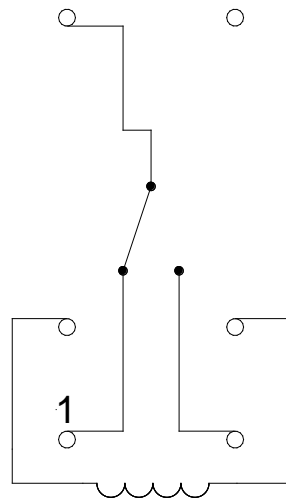

Case:

Metal:
Plastic:
None:

Terminals:

Diameter .025
Length .190
Centers see drawing

Contact Specifications:

Maximum switching power 20 watts
Maximum switching current 1.0 amps ac/dc
Maximum switching voltage 150 volts dc
Breakdown voltage 200 volts dc

Contact Configuration:

A B C 1 D
Mercury Dry X

Electrostatic shield:

Yes: No:

Other Contact Data:

Relay Specifications:

Coil resistance (+/- 10% @25°C) 320 ohms
Nominal coil voltage 5.0 vdc
Pullin voltage - max. 4.0 vdc
Dropout voltage - min. 0.3 vdc
Dielectric coil/case n/a
coil/cont 1500 vac
cont/cont 200 vdc

Other Relay Data:

Operate time: 2 msec. max.
Initial contact resistance: .1 ohm max.
Shock during 11 msec.: 50G max.
Temp range: -40 to 85 C°

Magnetic shield: Yes:
No:

Adjustment: Single side stable:
Bi-stable:

Equivalent to: Mfr. Aromat P/N DR-5V

Description: Magnetic Reed Relay – One pole – Form C – 5 VDC

Prepared By: RGW Date: 3/28/05 Customer: VARIOUS
Revised By: RGW Date: 10/26/06