




1. SCOPE

1.1 Scope. This drawing documents five product assurance classes as defined in paragraph 1.2.3 and MIL-PRF-38534. A choice of case outlines and lead finishes which are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of radiation hardness assurance levels are reflected in the PIN.

1.2 PIN. The PIN shall be as shown in the following example:

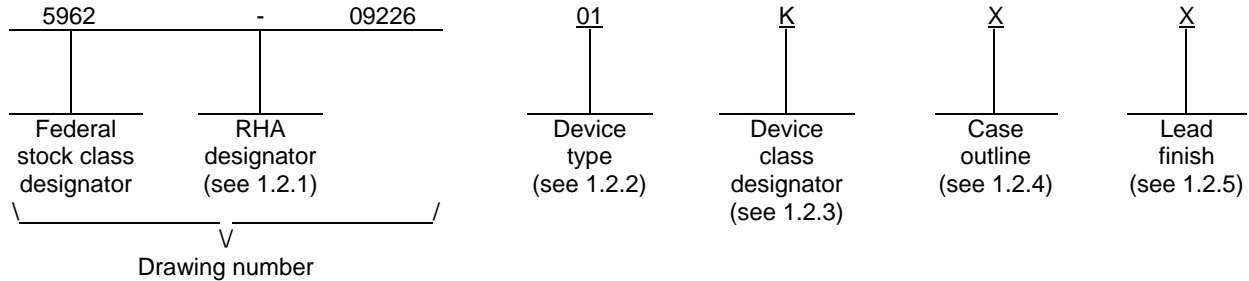

1.2.1 Radiation hardness assurance (RHA) designator. RHA marked devices shall meet the MIL-PRF-38534 specified RHA levels and shall be marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	DRS4485	RS485 Interface transceiver, dual channel

1.2.3 Device class designator. This device class designator shall be a single letter identifying the product assurance level. All levels are defined by the requirements of MIL-PRF-38534 and require QML Certification as well as qualification (Class H, K, and E) or QML Listing (Class G and D). The product assurance levels are as follows:

<u>Device class</u>	<u>Device performance documentation</u>
K	Highest reliability class available. This level is intended for use in space applications.
H	Standard military quality class level. This level is intended for use in applications where non-space high reliability devices are required.
G	Reduced testing version of the standard military quality class. This level uses the Class H screening and In-Process Inspections with a possible limited temperature range, manufacturer specified incoming flow, and the manufacturer guarantees (but may not test) periodic and conformance inspections (Group A, B, C and D).
E	Designates devices which are based upon one of the other classes (K, H, or G) with exception(s) taken to the requirements of that class. These exception(s) must be specified in the device acquisition document; therefore the acquisition document should be reviewed to ensure that the exception(s) taken will not adversely affect system performance.
D	Manufacturer specified quality class. Quality level is defined by the manufacturers internal, QML certified flow. This product may have a limited temperature range.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>2</b>

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
X	See Figure 1	18	Flat package

1.2.5 Lead finish. The lead finish shall be as specified in MIL-PRF-38534.

1.3 Absolute maximum ratings. 1/

Supply voltage ( $V_{CC}$ ) .....	+12 V dc
Control input voltage range .....	-0.5 V dc to $V_{CC}+0.5$ V dc
Driver input voltage range .....	-0.5 V dc to $V_{CC}+0.5$ V dc
Receiver input voltage .....	$\pm 5$ V
Driver output voltage .....	$\pm 5$ V
Receiver output voltage range .....	-0.5 V dc to $V_{CC}+0.5$ V dc
Junction temperature ( $T_J$ ) .....	+160°C
Power dissipation ( $P_D$ ) .....	0.25 W
Thermal resistance, junction-to-case ( $\theta_{JC}$ ) .....	6°C/W
Lead temperature (soldering, 10 seconds) .....	300°C
Storage temperature range .....	-65°C to +150°C

1.4 Recommended operating conditions.

Supply voltage ( $V_{CC}$ ) .....	+4.75 V dc to +5.25 V dc
Maximum serial data rate .....	500 kHz
Case operating temperature range ( $T_C$ ) .....	-55°C to +125°C

## 2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

### DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.

### DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.  
 MIL-STD-1835 - Interface Standard for Electronic Component Case Outlines.

### DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.  
 MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

1/ Stresses above the absolute maximum ratings may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>3</b>

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

### 3. REQUIREMENTS

3.1 Item requirements. The individual item performance requirements for device classes D, E, G, H, and K shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 shall include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for the applicable device class. The manufacturer may eliminate, modify or optimize the tests and inspections herein, however the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class. In addition, the modification in the QM plan shall not affect the form, fit, or function of the device for the applicable device class.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.3 Block diagram. The block diagram shall be as specified on figure 3.

3.2.4 Function table(s). The function table(s) shall be as specified on figure 4.

3.2.5 Timing test circuit. The timing test circuit shall be as specified on figure 5.

3.2.6 Timing diagram(s). The timing diagram(s) shall be as specified on figure 6.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking of device(s). Marking of device(s) shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked.

3.6 Data. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DLA Land and Maritime -VA) upon request.

3.7 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DLA Land and Maritime -VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.

3.8 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

### 4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>4</b>

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions +4.5 V dc ≤ V <sub>CC</sub> ≤ +5.5 V dc -55°C ≤ T <sub>C</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Differential driver output voltage (unloaded)	V <sub>OD1</sub>	I <sub>O</sub> = 0	1,2,3	01	2.5	5.0	Vp-p
Differential driver output voltage (with load)	V <sub>OD2</sub>	See figure 5	1,2,3	01	2.5	5.0	Vp-p
Change in magnitude of driver differential output voltage for complementary states	ΔV <sub>OD</sub>		1,2,3	01		0.2	Vp-p
Driver common mode output voltage	V <sub>OC</sub>		1,2,3	01		3.0	V
Change in magnitude of driver common mode output voltage for complementary states	Δ V <sub>OC</sub>		1,2,3	01		0.2	V
Input high voltage	V <sub>IH</sub>	DE, DI, $\overline{RE}$	1,2,3	01	2.4		V
Input low voltage	V <sub>IL</sub>					0.8	V
Input current	I <sub>IN</sub>					±2	μA
Differential input threshold voltage for receiver	V <sub>TH</sub>	-6.5 V ≤ V <sub>CM</sub> ≤ +5 V	1,2,3	01	-0.5	-0.1	V
Receiver input hysteresis <u>1/</u>	ΔV <sub>TH</sub>	V <sub>CM</sub> = 0	1,2,3	01		400	mV
Receiver output high voltage	V <sub>OH</sub>	I <sub>O</sub> = 0.4 mA	1,2,3	01	4.0		V
Receiver output low voltage	V <sub>OL</sub>	I <sub>O</sub> = -0.4 mA	1,2,3	01		.5	V
Receiver threshold	R <sub>X</sub> THLD		1,2,3	01	-500	-100	mVp
Receiver input differential resistance <u>1/</u>	R <sub>IN</sub> DIFF		1,2,3	01	30		kΩ
Receiver input common mode resistance <u>1/</u>	R <sub>IN</sub> CM		1,2,3	01	8		kΩ
Driver short circuit current	I <sub>OS</sub>		1,2,3	01	50	140	mA
Receiver short circuit current	I <sub>OSR</sub>	V <sub>OH</sub> to GND or V <sub>OL</sub> to V <sub>CC</sub>	1,2,3	01	7	85	mA
Supply current <u>2/</u>	I <sub>CC1</sub>	Channel 1 outputs are DE = 0 V, DI = Hi/Lo, $\overline{RE}$ = 5 V, Load = Hi/Lo, DRV <sub>OUT</sub> = High Z, Channel 2 outputs are all disabled	1,2,3	01		16	mA
	I <sub>CC2</sub>	Channel 1 outputs are DE = 5 V, DI = Hi/Lo, $\overline{RE}$ = 0 V, Load = No load, DRV <sub>OUT</sub> = low Z, Channel 2 outputs are all disabled	1,2,3	01		40	mA
	I <sub>CC3</sub>	Channel 1 outputs are DE = 5 V, DI = Hi/Lo, $\overline{RE}$ = 0 V, Load = 60 Ω, DRV <sub>OUT</sub> = low Z, Channel 2 outputs are all disabled	1,2,3	01		65	mA

See footnotes at end of table.

**STANDARD  
MICROCIRCUIT DRAWING**  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990

SIZE  
**A**

**5962-09226**

REVISION LEVEL  
**B**

SHEET  
**5**

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions +4.5 V dc ≤ V <sub>CC</sub> ≤ +5.5 V dc -55°C ≤ T <sub>C</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Driver input to output delay low to high	t <sub>PLH</sub>	R <sub>DIFF</sub> = 60 Ω, See figure 6	9,10,11	01		200	ns
Driver input to output delay high to low	t <sub>PHL</sub>		9,10,11	01		150	ns
Driver output to output delay	t <sub>SKEW</sub>		9,10,11	01		15	ns
Driver rise or fall time	t <sub>r</sub> , t <sub>f</sub>		9,10,11	01		150	ns
Driver output enable delay	t <sub>ZH</sub>		9,10,11	01		250	ns
Driver output disable delay	t <sub>LZ</sub>		9,10,11	01		350	ns
Receiver input to output delay low to high	t <sub>PLH</sub>	I <sub>O</sub> = 0, See figure 6	9,10,11	01		150	ns
Receiver input to output delay high to low	t <sub>PHL</sub>		9,10,11	01		150	ns
Receiver rise or fall time	t <sub>r</sub> , t <sub>f</sub>		9,10,11	01		75	ns
Receiver enable delay	t <sub>ZL</sub>		9,10,11	01		150	ns
Receiver disable delay	t <sub>ZH</sub>		9,10,11	01		180	ns

1/ Not tested. Guaranteed by design to the limits specified in table I.

2/ Current measurements are for both channels.


**STANDARD  
MICROCIRCUIT DRAWING**  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990

SIZE  
**A**

**5962-09226**

REVISION LEVEL  
**B**

SHEET  
**6**

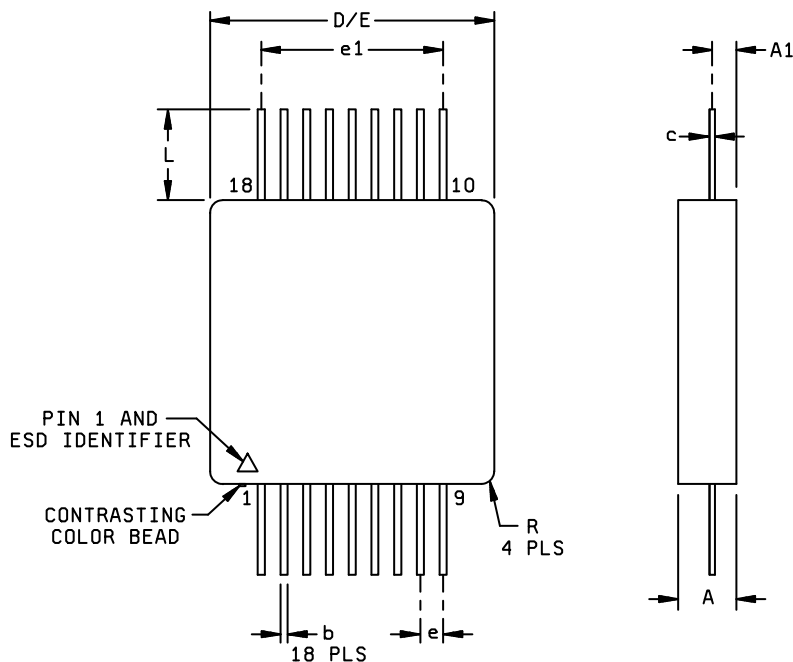

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A		.125		3.18
A1	.046	.056	1.17	1.42
b	.012	.018	.30	.46
c	.009	.011	.23	.28
D/E		.630		16.00
e	.050 BSC		1.27	
e1		.400		10.16
L	.200		5.08	
R	.015	.025	.38	.64

NOTES:

1. The U.S. preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.

FIGURE 1. Case outline.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>7</b>

Device type	01
Case outlines	X
Terminal number	Terminal symbol
1	DRIVER ENABLE 1
2	RECEIVER ENABLE 1
3	RECEIVER OUT 1
4	CASE_GND (see note)
5	DRIVER IN 1
6	BUSN 1
7	BUS 1
8	GND
9	V <sub>CC</sub>
10	V <sub>CC</sub>
11	GND
12	BUS 2
13	BUSN 2
14	DRIVER IN 2
15	NC_GND (see note)
16	RECEIVER OUT 2
17	RECEIVER ENABLE 2
18	DRIVER ENABLE 2

NOTE: CASE\_GND (Pin 4) and NC\_GND (Pin 15) should be grounded to eliminate or minimize electrostatic discharge (ESD) or static buildup.

FIGURE 2. Terminal connections.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>8</b>

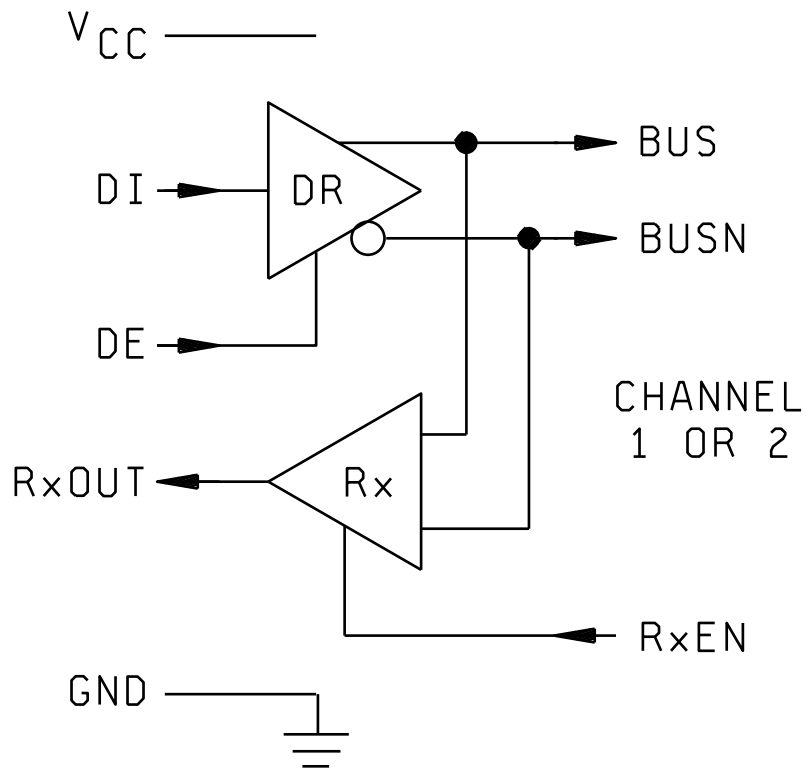


FIGURE 3. Block diagram.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>9</b>

**DRIVER**

Inputs		Outputs	
DI	DE	BUS	BUSN
H	H/OPEN	H	L
L	H/OPEN	L	H
X	L	OFF HiZ	OFF HiZ

**RECEIVER**

DIFF Input	$\overline{RE}$	Output
> -100 mV	L	H
< -500 mV	L	L
X	H/OPEN	H
OPEN	X	H
SHORT	X	H

NOTE: X = Don't care.

FIGURE 4. Function tables.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>10</b>

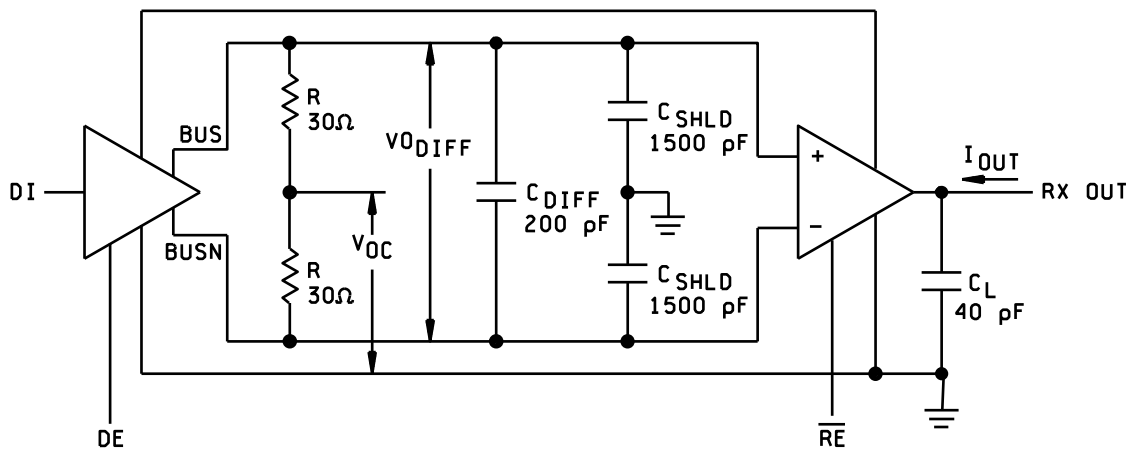


FIGURE 5. Driver/Receiver timing test circuit, (channel 1 or 2).

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>11</b>

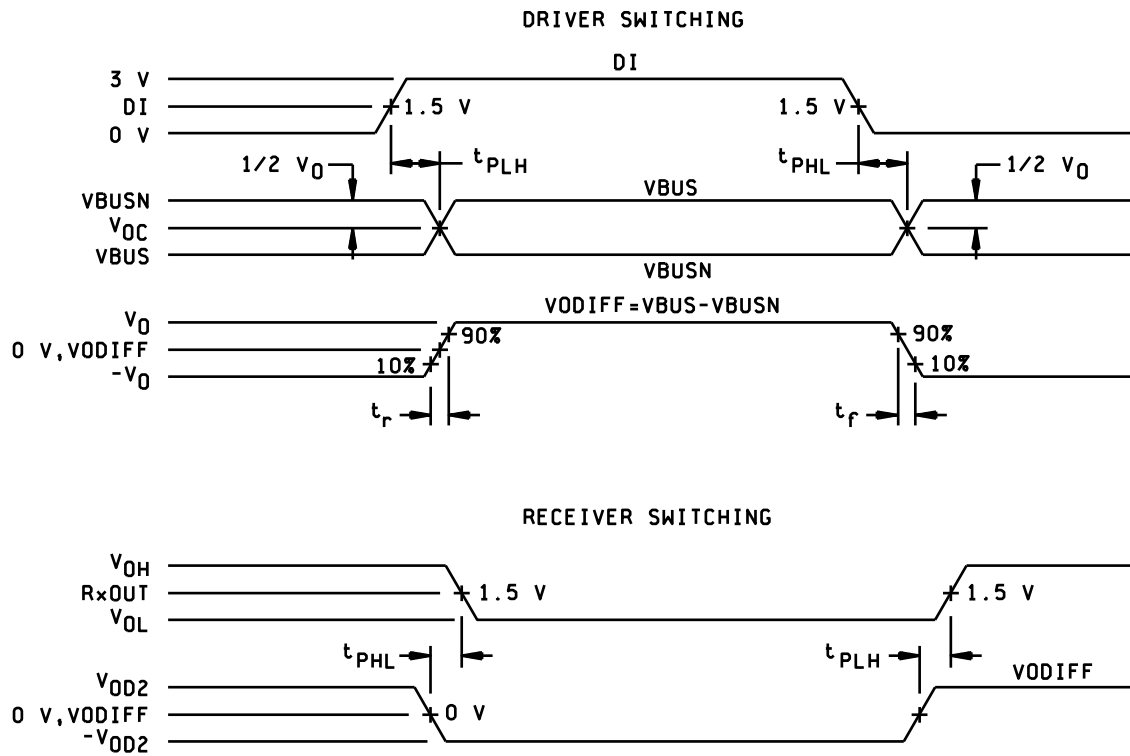


FIGURE 6. Timing diagrams.

**STANDARD  
MICROCIRCUIT DRAWING**  
DLA LAND AND MARITIME  
COLUMBUS, OHIO 43218-3990

SIZE  
**A**

5962-09226

REVISION LEVEL  
**B**

SHEET  
**12**

TABLE II. Electrical test requirements.

MIL-PRF-38534 test requirements	Subgroups (in accordance with MIL-PRF-38534, group A test table)
Interim electrical parameters	1, 9
Final electrical parameters	1*, 2, 3, 9, 10, 11
Group A test requirements	1, 2, 3, 9, 10, 11
Group C end-point electrical parameters	1, 2, 3, 9, 10, 11
End-point electrical parameters for Radiation Hardness Assurance (RHA) devices	Not applicable

\* PDA applies to subgroup 1.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

- (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime -VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
- (2) T<sub>A</sub> as specified in accordance with table I of method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.

4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, 6, 7, and 8 shall be omitted.

4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>13</b>

4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime -VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
  - (2)  $T_A$  as specified in accordance with table I of method 1005 of MIL-STD-883.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.

4.3.5 Radiation Hardness Assurance (RHA) inspection. RHA inspection is not currently applicable to this drawing.

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated as specified in MIL-PRF-38534.

6.4 Record of users. Military and industrial users shall inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime -VA, telephone (614) 692-0544.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime -VA, Columbus, Ohio 43218-3990, or telephone (614) 692-1081.

6.6 Sources of supply. Sources of supply are listed in MIL-HDBK-103 and QML-38534. The vendors listed in MIL-HDBK-103 and QML-38534 have submitted a certificate of compliance (see 3.7 herein) to DLA Land and Maritime -VA and have agreed to this drawing.

<b>STANDARD MICROCIRCUIT DRAWING</b> DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE <b>A</b>		<b>5962-09226</b>
		REVISION LEVEL <b>B</b>	SHEET <b>14</b>

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 11-09-01

Approved sources of supply for SMD 5962-09226 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38534 during the next revisions. MIL-HDBK-103 and QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime -VA. This information bulletin is superseded by the next dated revisions of MIL-HDBK-103 and QML-38534. DLA Land and Maritime maintains an online database of all current sources of supply at <http://www.landandmaritime.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-0922601KXA	88379	DRS4485-201-2S
5962-0922601KXC	88379	DRS4485-201-1S

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the Vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE number

88379

Vendor name and address

Aeroflex Plainview Incorporated,  
 (Aeroflex Microelectronics Solutions)  
 35 South Service Road  
 Plainview, NY 11803

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.