
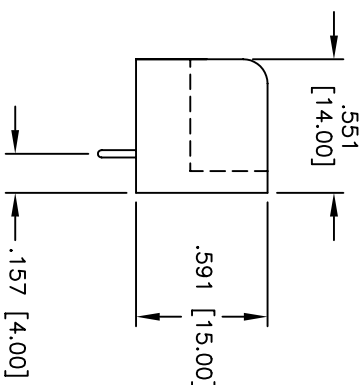
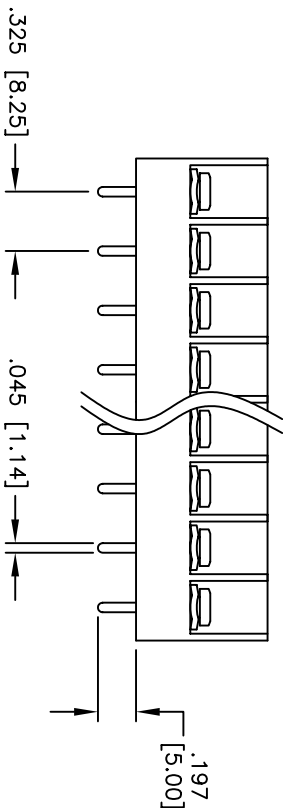


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/23/05	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

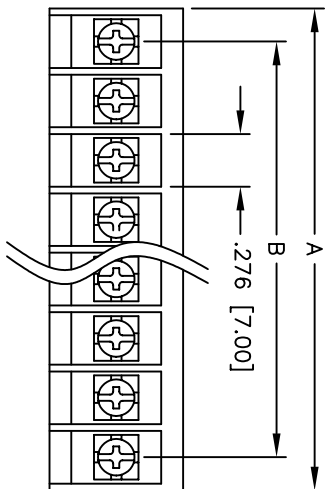

**SPECIFICATIONS:**

- Material:**  
 Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass, Tin plated  
 Screws: Steel, Nickel plated  
 Hardware: Brass, Tin plated  
**Electrical:**  
 Operating voltage: 250 VAC max.  
 Current rating: 15 Amps max.  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 2,000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -65°C to +125°C  
**Environmental:**  
 Lead free, RoHS compliant  
 Recommended soldering temp: 230°C for 5 seconds

A = .325 [8.25] x No. of Positions + .372 [9.45]  
 B = .325 [8.25] x No. of Positions

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .X ±.10 ØXX ±.015  
 .XX ±.020 ØXXX ±.010  
 .XXX ±.015

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710



APPROVALS	DATE
DRAWN SS	3/23/05
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	REV.
.325 [8.25] CENTERLINE BARRIER BLOCK VERTICAL, PCB, BARRIER ENDS	X	TBC-XX-01-B	-

SCALE: NTS SHEET 1 OF 1