


PRELIMINARY



SCHEMATIC

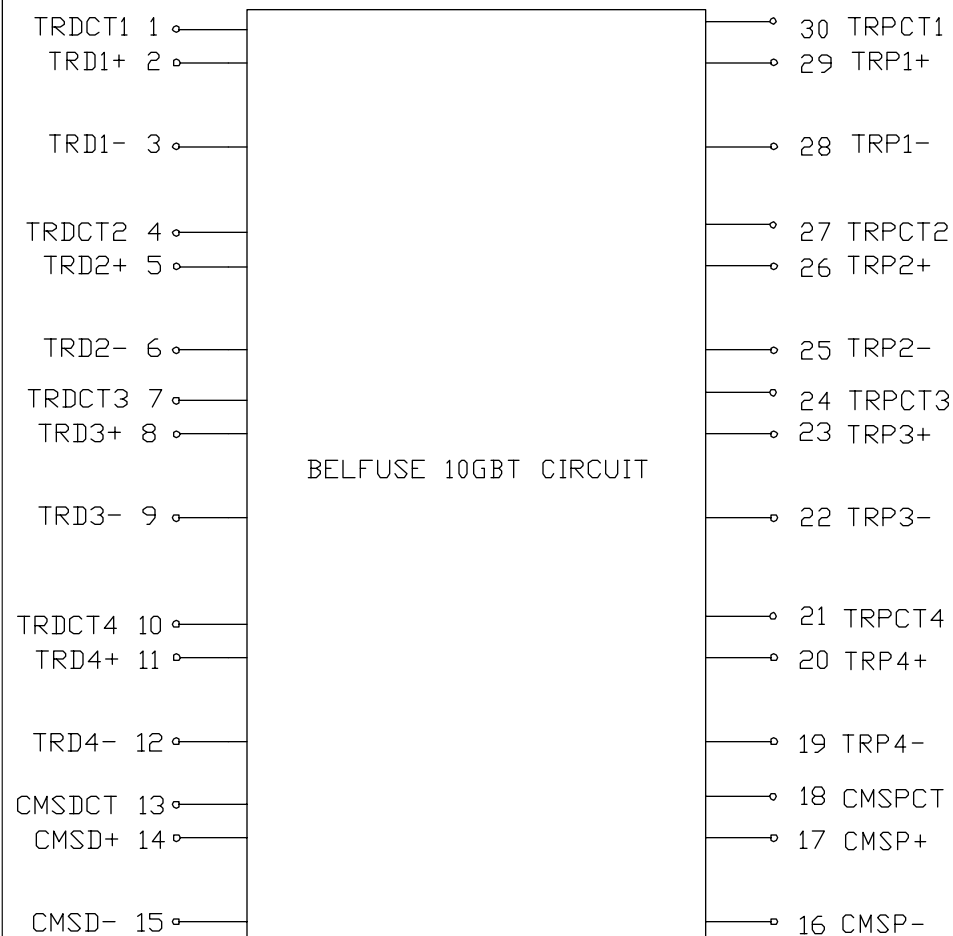

ELECTRICAL SPECIFICATION @25°C

URNS RATIO

(2-3) : (28-29)	1CT : 1CT
(5-6) : (25-26)	1CT : 1CT
(8-9) : (22-23)	1CT : 1CT
(11-12) : (19-20)	1CT : 1CT
(14-15) : (16-17)	1CT : 1CT

POLARITY

2°&29°, 5°&26°, 8°&23°
11°&20° & 14°&17°

INSERTION LOSS

FREQ.(MHz)	1	2-300	400	500
dB MAX	0.3	1.0	1.5	2.0

RETURN LOSS

FREQ.(MHz)	1	2-300	400	500	600
dB MIN	18	20	15	12	9

CM TO DM
REJECTION RATIO

FREQ.(MHz)	50	100	200	300	400	500
dB MIN	48	42	36	33	30	28

CM TO CM
REJECTION RATIO

FREQ.(MHz)	50	100	200	300	400	500
dB MIN	30	27	24	22	21	20



HIPOT

1500V_{rms}

ORIGINATED BY	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REFERENCE		 COMPONENTS CONNECTED PLANET
TK	02-11-10		S558-10GB-11	TOL. IN INCH		UNIT : INCH [mm]	REV. : X2	
DRAWN BY	DATE		FILE NAME	.X		SCALE : N/A	SIZE : A4	
			S55810GB011_X2.DWG	.XX				
				.XXX				

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

PRELIMINARY COPY

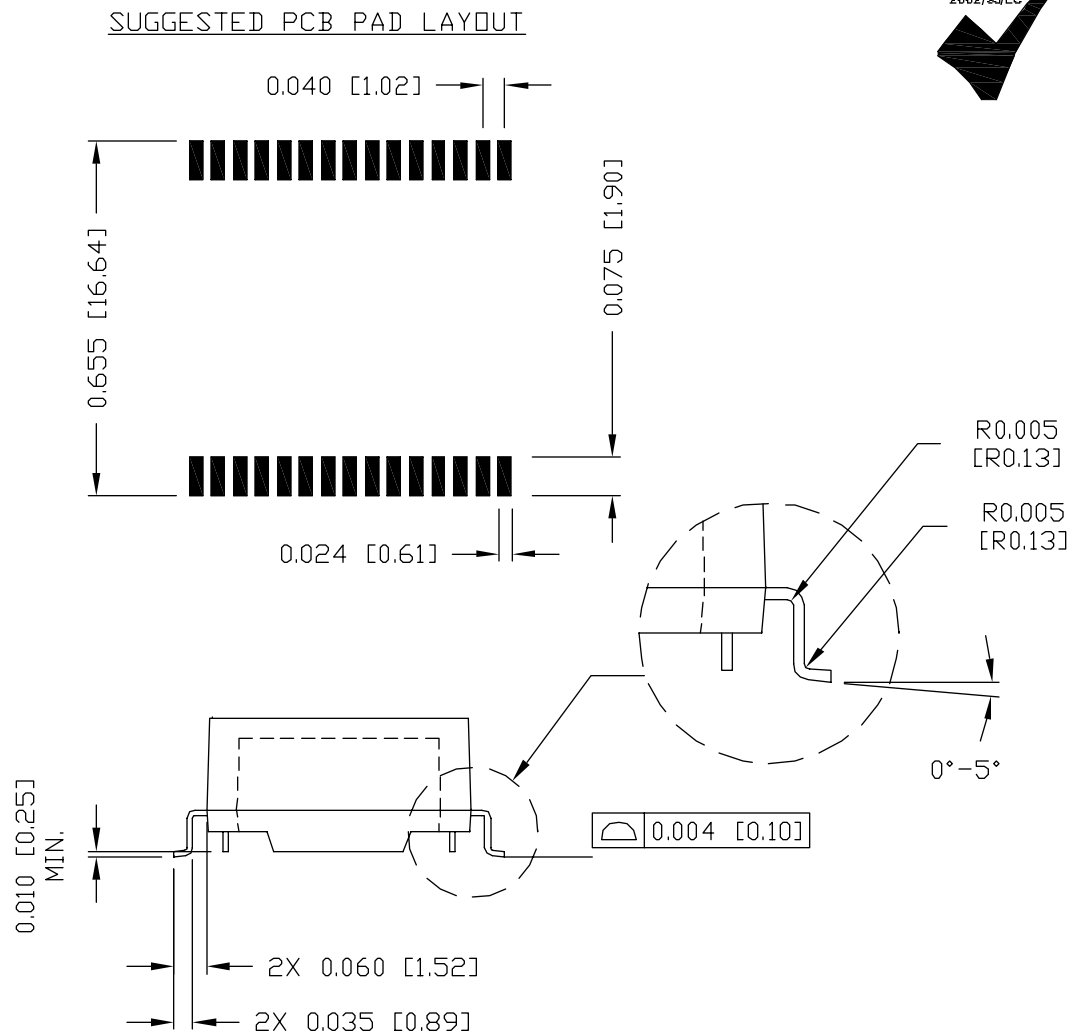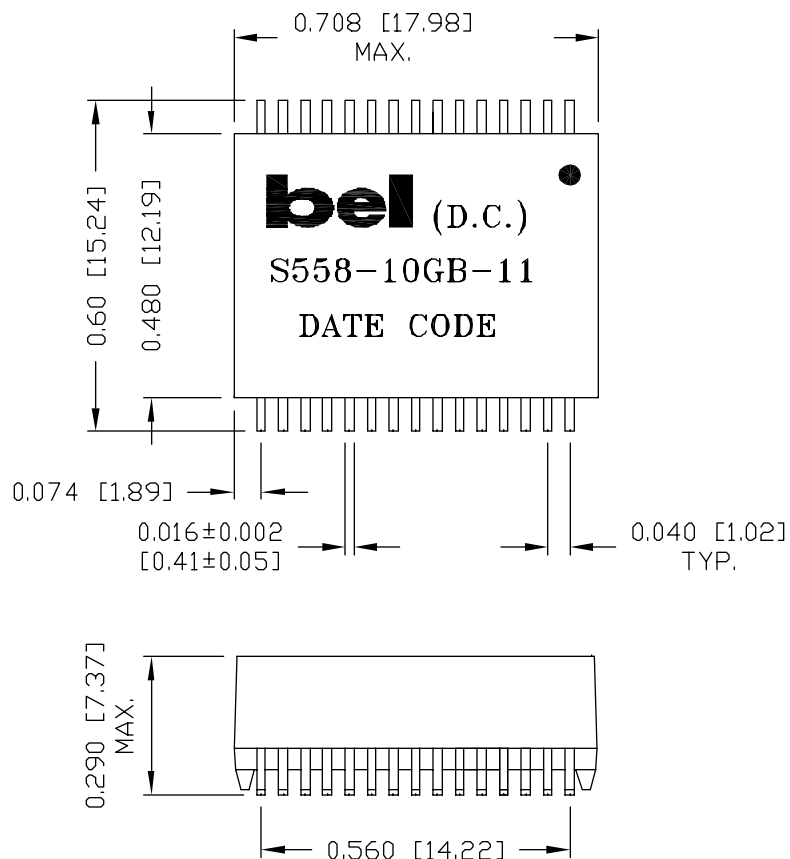

NOTES:

1. STANDARD MARKING REFER TO DOC. HAND-WORK-04.

DRWN TK	DATE 02-11-10	TITLE MECHANICAL SPECIFICATION	PART NO. / DRAWING NO. S558-10GB-11	STANDARD DIM. TOL. IN INCH		[] METRIC DIM. AS REFERENCE		REV. : X2	SIZE : A4	PAGE : 3	 COMPONENTS FOR A CONNECTED PLANET
				FILE NAME S55810GB011_X2.DWG	.X ±0.01 .XXX ±0.005	UNIT : INCH [mm]	SCALE : N/A				