


Common Mode EMI Suppression Inductor


PARAMETER	MIN.	TYP.	MAX.	UNITS
Inductance @ 0.20 Vrms / 1 kHz		140		μH
DCR of each Winding		1.3		mΩ
RMS rated Current for 40°C rise.			30	A
Leakage Inductance		1.8		μH
Dielectric Strength	1250			Vrms
Creepage Between Windings	3.0			mm

Physical Dimensions - inches (mm)

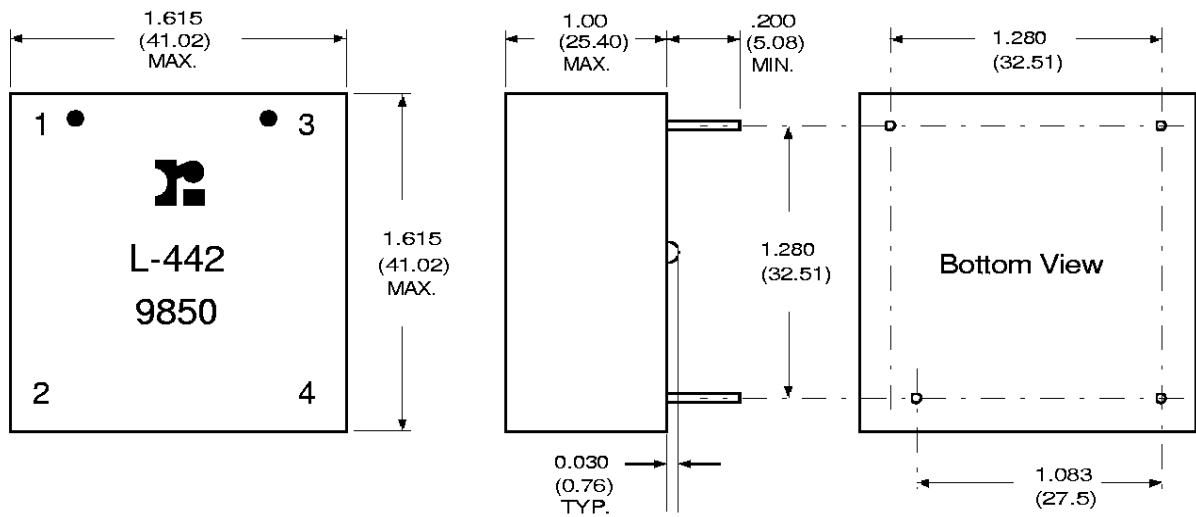

LEAD #11 (AWG)

Schematic Diagram

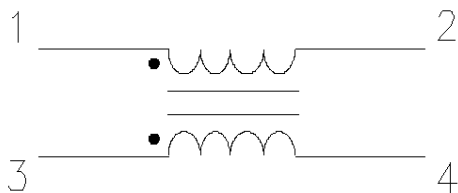

RHOMBUS P/N: L-442	
CUST P/N:	NAME:
DATE: 12/11/98	SHEET: 1 OF 1