


LDR-FX-XXZ-X-T-XXSTSA-XX

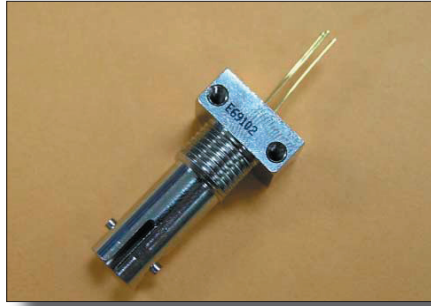

Features

- 1310nm or 1550nm Wavelength
- High Optical Power
- Low Threshold Current
- High Operating Temperature
- High Speed
- Rear Facet Monitor
- Uncooled
- Custom Designed ST-A Receptacle
- For Singlemode & Multimode Use
- ST Active device Mount
- Design for fiber-optics networks
- RoHS Compliant available

Absolute Maximum Ratings (Tc=25°C) λ=1310nm & λ=1550nm

Parameter	Symbol	Value	Unit	Note
Fiber Output Power L/M/H/U	P _f	1(L)/1.5(M)/2.5(H)/3(U)	mW	λ=1310nm
		0.6(L)/1(M)/2(H)/2.6(U)		λ=1550nm
LD Reverse Voltage	V _{RLD}	2	V	-
PD Reverse Voltage	V _{RPD}	10	V	-
PD Forward Current	I _{FPD}	2.0	mA	-
Operating Temperature	T _{opr}	-40 ~ 85	°C	-
Storage Temperature	T _{stg}	-40 ~ 85	°C	-

(All optical data refer to a coupled 9/125μm SM fiber & 50/125μm MM fiber)

Optical and Electrical Characteristics (Tc=25°C λ=1310nm)

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Threshold Current	I _{th}	-	10	15	mA	CW
Output Power L M H U	P _f	0.2	-	0.5	mW	CW, I _{op} =I _{th} +20mA Kink free
		0.5	-	1		
		1	1.6	-		
		1.7	2	-		
Peak Wavelength	λ	1290	1310	1330	nm	CW, P _f =P _f (Min)
Spectral Width (RMS)	Δλ	-	2	5	nm	CW, P _f =P _f (Min)
Forward Voltage	V _f	-	1.2	1.5	V	CW, P _f =P _f (Min)
Rise Time/Fall Time	T _r /T _f	-	-	0.5	ns	CW, P _f =P _f (Min), I _{bias} =I _{th} , 10~90%
		-	-	0.15		CW, P _f =P _f (Min), I _{bias} =I _{th} , 20~80% Level length=1mm
Tracking error	ΔP _f /P _f	-1.5	-	1.5	dB	APC, -40 to +85°C
PD Monitor Current	I _M	100	-	-	μA	CW, P _f =P _f (Min), V _{RPD} =2V
PD Dark Current	I _{DARK}	-	-	0.1	μA	V _{RPD} =5V
PD Capacitance	C _t	-	6	15	pF	V _{RPD} =5V, f=1MHz

Note: 1.Pin assignment can be customized.

2.Specifications subject to change without Notice.

(All optical data refer to a coupled 9/125μm SM fiber & 50/125μm MM fiber)

Optical and Electrical Characteristics (Tc=25°C λ=1550nm)

Parameter		Symbol	Min	Typ	Max	Unit	Test Conditions
Threshold Current		I _{th}	-	10	15	mA	CW
Output Power	L M H U	P _f	0.2	-	0.5	mW	CW, I _{op} =I _{th} +25mA Kink free
			0.5	-	1		
			1	1.6	-		
			1.7	2	-		
Peak Wavelength		λ	1530	1550	1570	nm	CW, P _f =P _f (Min)
Spectral Width (RMS)		Δλ	-	2	5	nm	CW, P _f =P _f (Min)
Foward Voltage		V _f	-	1.2	1.5	V	CW, P _f =P _f (Min)
Rise Time/Fall Time	3 4	T _r /T _f	-	-	0.5	ns	CW, P _f =P _f (Min), I _{bias} =I _{th} , 10~90%
			-	-	0.15		CW, P _f =P _f (Min), I _{bias} =I _{th} , 20~80% Level length=1mm
Tracking error		ΔP _f /P _f	-1.5	-	1.5	dB	APC, -40 to +85°C
PD Monitor Current		I _M	100	-	-	μA	CW, P _f =P _f (Min), V _{RPD} =2V
PD Dark Current		I _{DARK}	-	-	0.1	μA	V _{RPD} =5V
PD Capacitance		C _t	-	6	15	pF	V _{RPD} =5V , f=1MHz


Note: 1.Pin assignment can be customized.

2.Specifications subject to change without Notice.


Outline Drawing

Units in mm

Receptacle Package Style : ST - A Type

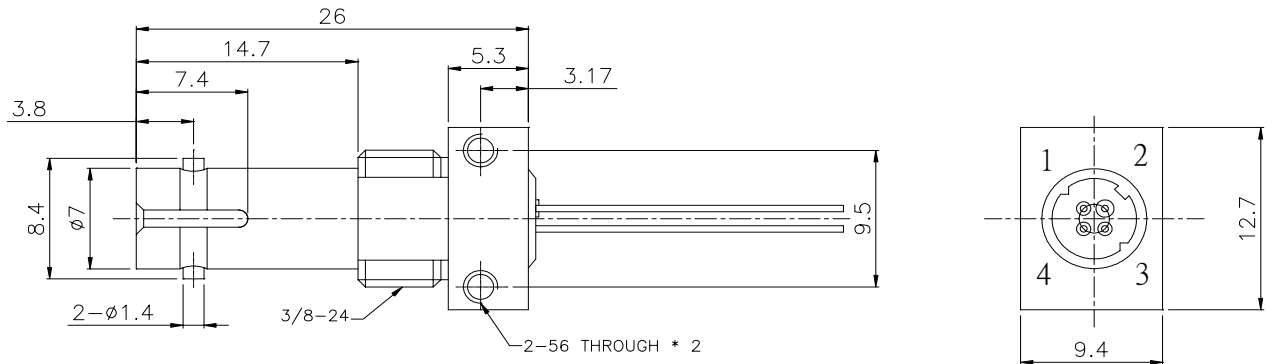

LD Pin Assignment



Pin 1 : Laser Cathode
Pin 2 : Laser Anode and Case Gnd
Pin 3 : Monitor Diode Anode
Pin 4 : Monitor Diode Cathode



Pin 1 : Laser Anode and Monitor Diode Cathode
Pin 2 : Case Gnd
Pin 3 : Laser Cathode
Pin 4 : Monitor Diode Anode

LDR-FX-XXZ-X-T-XXSTSA

Ordering Information

LDR-FX-XXZ-X-T-XXSTSA-XX

Family
LDR=LD Receptacle

Application
3=1.25Gbps
4=2.5Gbps

Tolerance
Z= ± 20 nm

Temperature
T= -40~+85°C

Fiber
S=9/125 μ m
M=50/125 μ m

Stub
S=Fiber Stub

Device
F=FP

Wavelength
31:1310nm
55:1550nm

Power
L/M/H/U

Pinout
A/D

Connector
ST

Option
A=ST-A

RoHS Compliant
-/G5/R5

Blank = RoHS non-compliant product

G5 = RoHS 5/6-compliant product (lead exemption)

GR = Full RoHS compliant product (no exemption)

Warnings:

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notes:

IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at LuminentOIC's sole and absolute discretion. LuminentOIC warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and LuminentOIC expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

LuminentOIC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and LuminentOIC makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. LuminentOIC customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify LuminentOIC for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that LuminentOIC is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact LuminentOIC to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© LuminentOIC, Inc. 2006
All rights reserved