


CUSTOMER DRAWING

P/N: 3800S 75/-3


REV
AD

PART NUMBER	MATERIAL	FINISH
3800S 75A-3	.020 THICK BRASS	PRETINNED
3800S 75AB-3	.020 THICK BRASS	NONE
3800S 75AD-3	.020 THICK BRASS	POST-TIN

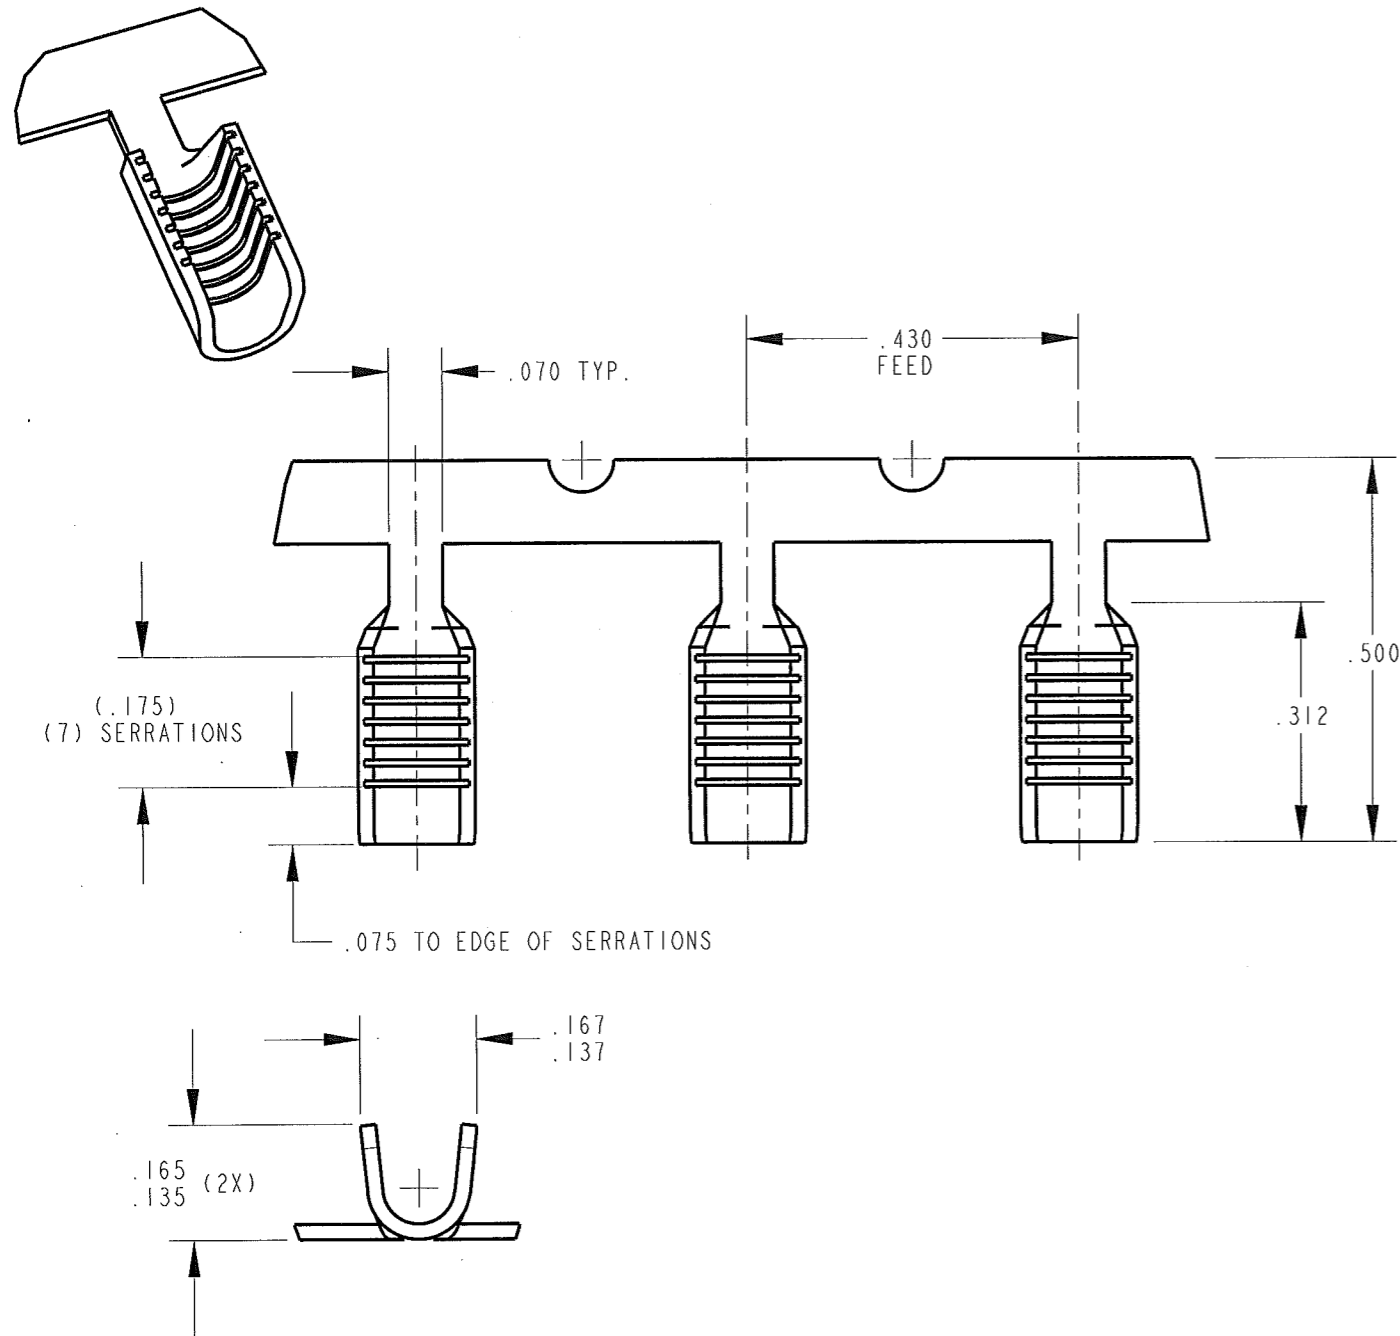

- NOTES:
- CMA RANGE: 1600 TO 5000
 - FOR PIGTAIL SPLICES USED IN A BENCH APPLICATOR, ADD SUFFIX "PP" TO PART NUMBER (i.e. 3800S 75A-3PP), SEE FIGURE 1 FOR REELING.
 - FOR THROUGH SPLICES USED IN A BENCH APPLICATOR, THE PART NUMBER REMAINS THE SAME AS IN THE TABLE (i.e. 3800S 75A-3). SEE FIGURE 2 FOR REELING.
 - FOR PIGTAIL AND THROUGH SPLICES USED IN A SLIM-LINE AIR PRESS, THE PART NUMBER REMAINS THE SAME AS IN THE TABLE (i.e. 3800S 75A-3). SEE FIGURE 2 FOR REELING.
 - PAPER INTERLEAVING ADDED TO REDUCE TANGLING IN REELS.
 - RECOMMENDED WIRE COMBINATIONS:
 - (1) STRANDED WIRE
 - (2) MANGET WIRES
 - (2) MANGET WIRES NOT EXCEEDING 2 1/2 WIRE SIZES DIFFERENCE (i.e. 18 & 20 1/2)
 - (3) MAGNET WIRES UPON ARK-LES CONFIRMATION
 - MAGNET WIRES ARE TO BE PLACED IN SPLICE FIRST. STRANDED WIRES ARE TO BE PLACED ON TOP OF OR ADJACENT TO MAGNET WIRE.
 - REFER TO CRIMP HEIGHT FOR APPLICATION DATA.

ARK-LES
UNCONTROLLED

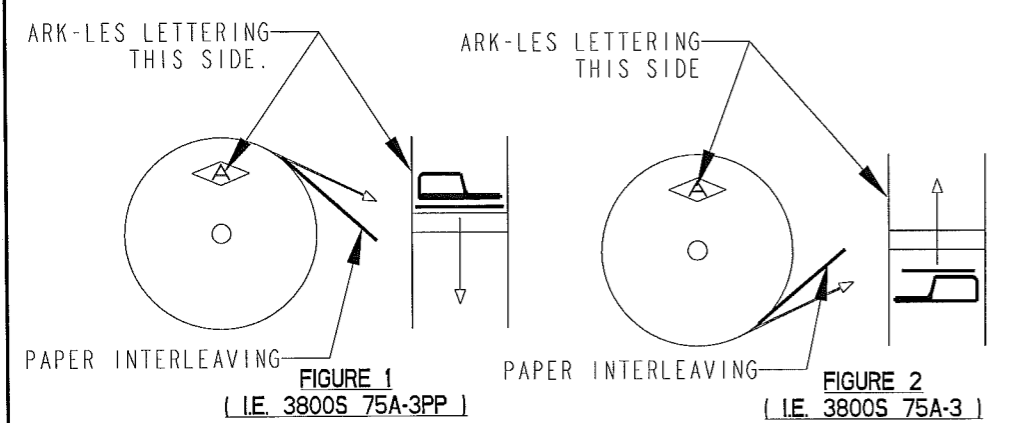

PRINT DIST.	PROD. REL.	6/8/1978	CHK'D	TOLERANCES UNLESS OTHERWISE SPECIFIED	<p>STOUGHTON, MA</p>
DEPT #	QUOTE REL.		APP.	DECIMALS ± .010	
ENG X	DRAWN BY D.O'NEILL 11/02/06		APP.	METRIC ± 0.25mm	<p>ORIGINAL IF RED</p> <p>PART NAME CUSTOMER DRAWING SPLICE TERMINAL</p>
SALES	SUPERSEDES DWG. DATED: 11/22/2004		APP.	ANGLES ± 1°	
STO X	SCALE 4:1			MATERIAL: SEE TABLE	<p>CAD#: 3800S_75-3-REVAD_CUST</p> <p>P/N: 3800S 75/-3</p>
RAL	DO NOT SCALE PRINT			FINISH: SEE TABLE	
JZ					REV AD
CHINA					
REV.	DESCRIPTION	DATE	DR.		