

E-Series 1:4 RF Flux Coupled Transformer 5.0-200 MHz

Rev. V3

Features

- 1:4 Impedance
- CT on Secondary
- Surface Mount
- Available on Tape and Reel.

Description

M/A-COM's MABACT0018 is a 1:4 RF flux coupled step-up transformer in a low cost, surface mount package. Ideally suited for high volume cellular & wireless applications. Typical applications include single to balance mode conversion and impedance matching.


Product Image




Ordering Information

Part Number	Package
MABACT0018	2000 piece reel

Case Style: SM-138-A

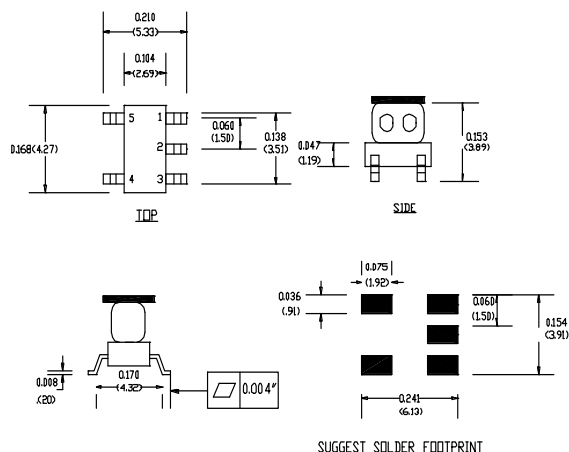

Schematic

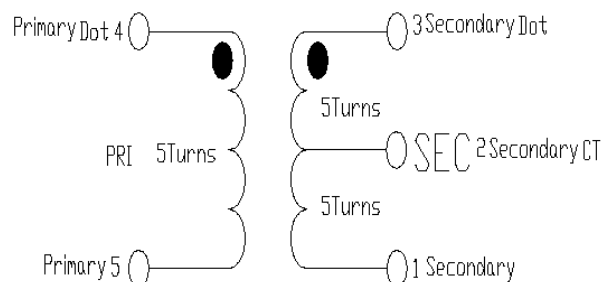

Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

Dimensions in inches [mm].
Tolerance where not specified: .xx ± .02, .xxx ± .010

E-Series 1:4 RF Flux Coupled Transformer 5.0-200 MHz

Rev. V3

Electrical Specifications: $T_A = 25^\circ\text{C}$

Parameter	Frequency (MHz)	Units	Typ	Min	Max
Frequency Range	5 - 65	-	-	-	-
	65 - 200	-	-	-	-
Insertion Loss	5 - 65	dB	0.4	-	0.7
	65 - 200	dB	0.9	-	1.5
Amp Balance	5 - 65	dB	0.02	-	0.1
	65 - 200	dB	0.20	-	0.5
Phase Balance	5 - 65	Deg	0.4	-	2.0
	65 - 200	Deg	2.0	-	8.0
Input Return Loss	5 - 65	dB	22.0	15.0	-
	65 - 200	dB	11.0	7.0	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	200 mA
Storage Temperature	-40° to +85° C
Operating Temperature	-40° to +85° C
Pin Temp. (10sec)	260°C


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

E-Series 1:4 RF Flux Coupled Transformer 5.0-200 MHz


Rev. V3

Typical Performance Curves at +25°C


Insertion Loss

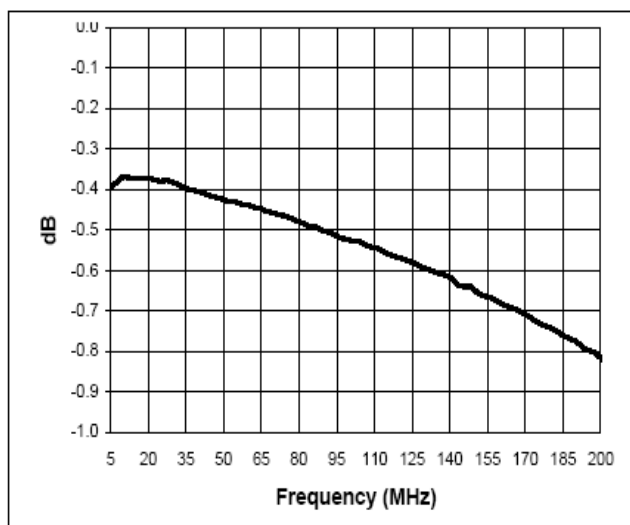


Input Return Loss

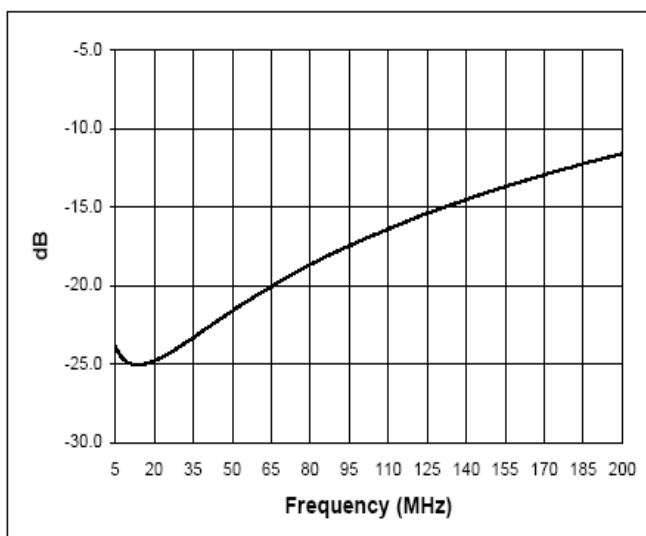

Amplitude Unbalance

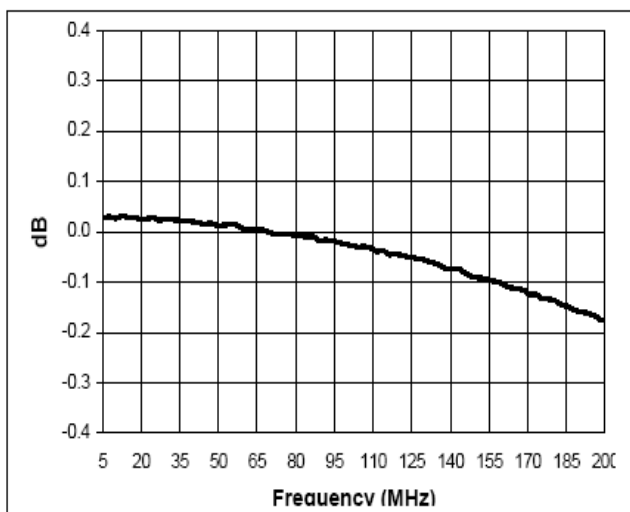

Phase Unbalance

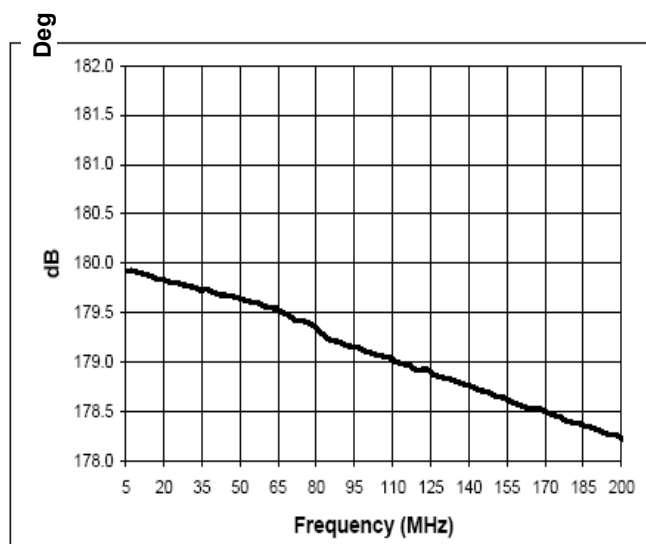

E-Series 1:4 RF Flux Coupled Transformer 5.0-200 MHz

Rev. V3

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.