

Features

- Static 186 CPU core.
- Idle and Powerdown Modes
- Clock Generator
- 2 Serial Channels with Independent Baud Rate Generators
- 3 Programmable 16-Bit Timers
- 2 Parallel Ports
- 10 Programmable Chip Selects with Programmable Wait State Generators
- Memory Refresh Generator
- High Impedance Test Mode (ONCE)
- High Speed Operation
 - 25 MHz @ 5 V
 - 16 MHz @ 3 V
- 1 MB Memory Address Capability
- 64 KB I/O Address Capability
- Available in the Following Packages:
 - 84 Pin PLCC
 - 80 Pin EIAJ Quad Flat Pack
 - 80 Pin Shrink Quad Flat Pack
- Extended Temperature Range (-40C to +85C)
- Direct replacement for Intel 80C186EB / 80C188EB / 80L186EB / 80L188EB microprocessors
- Implemented with the Tekmos Customer Configured Microcontroller (CCM) technology.

General Description

The TK80C186EB and the TK80C188EB are all based on the same die. Unless otherwise noted, discussions of the TK80C186EB can be applied to both parts.

The TK80C186EB is an enhancement of the original 80C186EA microprocessor. It offers new features while remaining object code compatible with the original EA series of processors.

The TK80C186EB will work correctly at either 3 or 5 volts. The original Intel parts were sorted by minimum operating voltage to select the parts for the "L" series. With today's improved process control, it is possible for all Tekmos parts to operate at both 3 and 5 volts. Orders for the "L" series will be filled with "C" parts.

The small feature sizes (0.35u) used in the TK80C186EB result in a significant power reduction as compared to the original devices. This is enhanced through use of the Idle and Powerdown modes. These modes stop portions of, or all of the internal clocks to achieve the power savings.

The TK80C186EB integrates commonly used system peripherals with the 186 CPU core to save space and reduce overall power consumption. A programmable interrupt controller supports and prioritizes 128 interrupts from internal, external, and software sources. The TK80C186EB also contains three programmable timer / counters and two serial channels.

Figure 1 shows the block diagram for the TK80C186EB / TK80C188EB.

Block Diagram

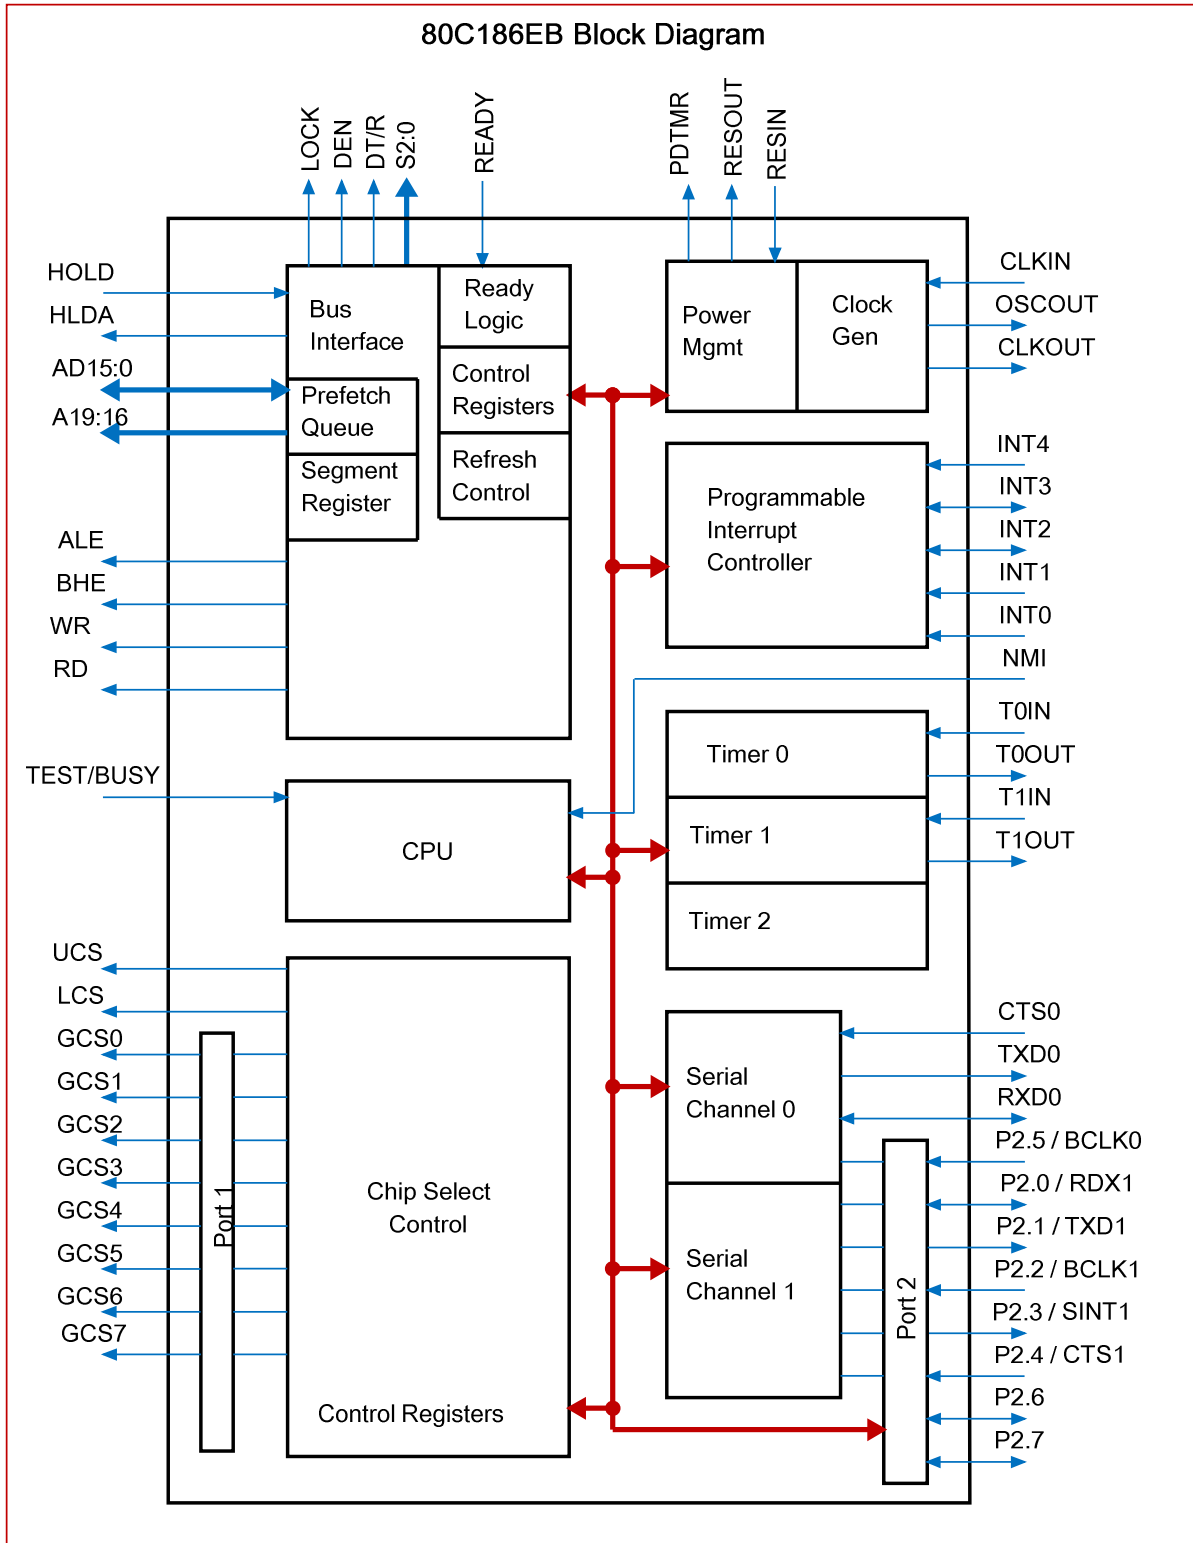


Figure 1, TK80C186EB / TK80C188EB Block Diagram

TK80C186EB Core Architecture

Bus Interface Unit

The bus interface unit generates the local bus control signals. It uses a HOLD / HLDA protocol to share the bus with other bus masters.

The Bus Interface Unit generates the 20 bit address, read strobe, write strobe, data, and bus cycle status information. It also reads data off of the local bus during a read operation. The READY pin optionally extends the bus cycle beyond the minimum 4 clocks.

The Bus Interface Unit also generates the DEN and DT/R control signals for external transceiver chips. This allows for the buffering of the multiplexed address / data bus.

Clock Generator

The TK80C186EB contains a clock generator that supports both internal and external clock generation. It consists of a crystal oscillator, a divide-by-two circuit, and clock gating circuitry to support the power-down and idle modes.

The clock generator can be used with either a crystal or it can be driven directly from an external clock source. Figure 2 shows the connections for both cases.

The crystal or clock frequency must be twice the desired operating frequency due to the divide-by-two circuit. This produces a 50% duty cycle on the internal clock, and makes the processor performance independent of duty cycle variations present on the input clock. The internal clock is available on the CLKOUT pin. All AC timings are referenced to the CLKOUT pin.

TK80C186EB Peripherals

The TK80C186EB contains a number of integrated peripherals. These flexible peripherals are integrated with each other to provide a solution to most processor applications.

The TK80C186EB contains the following peripherals:

- 7 / 10 Input Interrupt Controller
- 3 Channel Timer / Counter
- 2 Channel Serial Controller
- 10 Output Chip Select Controller
- DRAM Refresh Controller
- 2 8-bit parallel ports
- Power Management Logic

All of the peripheral control registers are contained within a 128x16 Peripheral Control Block (PCB). The PCB can be relocated to either memory or I/O space on any 256 byte address boundary.

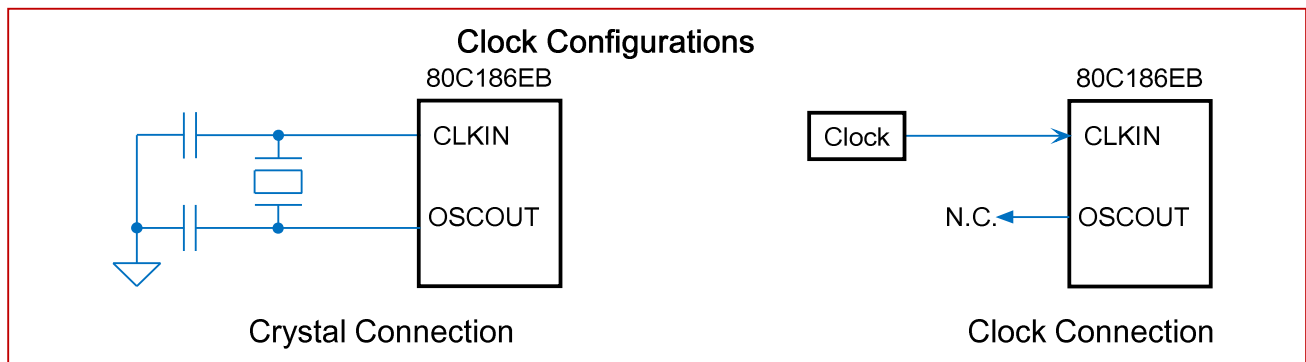


Figure 2 – Clock Configurations

Figure 3 shows the register assignments in the PCB.

Interrupt Controller

The interrupt controller receives both internal and external interrupt requests. It assigns a programmable priority to each interrupt before passing it on to the CPU. Each interrupt source can be individually enabled or disabled. There is also a global interrupt enable.

External interrupts come from the pins INT4:0, while internal interrupts come from the timers and serial channels. While there is only a single interrupt enable for all of the timers, each timer has its own interrupt vector. Serial Channel 0 also has a single interrupt enable with separate interrupt vectors for the transmit and receive interrupts. The interrupt for Serial Channel 1 is brought to an external pin, and may be connected to one of the external interrupts.

The NMI interrupt pin is directly connected to the CPU.

Serial Controller

The Serial controller contains two independent channels. Each channel has its own baud rate generator, or may be clocked through an external baud rate source.

Each serial channel has one synchronous mode and 4 asynchronous modes. These modes support various data lengths and parity options.

In addition, the serial channels support a multiprocessor protocol for devices connected to a common serial bus.

Timer / Counter

The timer / counter contains 3 16-bit timers. Two of them may be connected to external pins for clocking or control. The third timer is clocked

internally, but may be used to provide a clock source to the other two timers.

The timers may be programmed to meet the needs of many applications. In addition to keeping track of the passage of time, they may also count or time external events, or generate non-repetitive waveforms.

Chip Select Controller

The Chip Select Controller generates up to 10 programmable chip selects for accessing both memories and peripherals. Each chip select can also be programmed to terminate a bus cycle independently of the state of the READY pin. The chip selects are available for all bus cycles, independent of the internal source (CPU or refresh).

Refresh Controller

The refresh controller supports the use of DRAMs by generating periodic read cycles of consecutive 12-bit addresses. The delay between the cycles is programmable up to 512 clocks. The high order address lines are also programmable to support refresh cycles on any 8K memory block.

Power Management

The power management logic provides two modes to control the power consumption. These are:

- Idle Mode
- Power Down Mode

The idle mode stops the CPU and Bus clocks, while allowing the peripheral clocks to continue to run. This reduces overall power while allowing the peripherals to remain active and to awaken the processor as necessary.

The power down mode stops the oscillator and all internal clocks. All registers maintain their values as long as Vdd is present. Current is reduced to leakage values.

| PCB Register Assignments | | | | | | | |
|--------------------------|-------------------|-----|------------------|-----|-----------------|-----|----------|
| PCB | Function | PCB | Function | PCB | Function | PCB | Function |
| 00 | Reserved | 40 | Timer 2 Count | 80 | GCS0 Start | C0 | Reserved |
| 02 | End of Interrupt | 42 | Timer 2 Compare | 82 | GCS0 Stop | C2 | Reserved |
| 04 | Poll | 44 | Reserved | 84 | GCS1 Start | C4 | Reserved |
| 06 | Poll status | 46 | Timer 2 Control | 86 | GCS1 Stop | C6 | Reserved |
| 08 | Interrupt Mask | 48 | Reserved | 88 | GCS2 Start | C8 | Reserved |
| 0A | Priority Mask | 4A | Reserved | 8A | GCS2 Stop | CA | Reserved |
| 0C | In-Service | 4C | Reserved | 8C | GCS3 Start | CC | Reserved |
| 0E | Interrupt Req | 4E | Reserved | 8E | GCS3 Stop | CE | Reserved |
| 10 | Interrupt Status | 50 | Port 1 Direction | 90 | GCS4 Start | D0 | Reserved |
| 12 | Timer Control | 52 | Port 1 Pin | 92 | GCS4 Stop | D2 | Reserved |
| 14 | Serial Control | 54 | Port 1 Control | 94 | GCS5 Start | D4 | Reserved |
| 16 | INT4 Control | 56 | Port 1 Latch | 96 | GCS5 Stop | D6 | Reserved |
| 18 | INT0 Control | 58 | Port 2 Direction | 98 | GCS6 Start | D8 | Reserved |
| 1A | INT1 Control | 5A | Port 2 Pin | 9A | GCS6 Stop | DA | Reserved |
| 1C | INT2 Control | 5C | Port 2 Control | 9C | GCS7 Start | DC | Reserved |
| 1E | INT3 Control | 5E | Port 2 Latch | 9E | GCS7 Stop | DE | Reserved |
| 20 | Reserved | 60 | Serial 0 Baud | A0 | LCS Start | E0 | Reserved |
| 22 | Reserved | 62 | Serial 0 Count | A2 | LCS Stop | E2 | Reserved |
| 24 | Reserved | 64 | Serial 0 Control | A4 | UCS Start | E4 | Reserved |
| 26 | Reserved | 66 | Serial 0 Status | A6 | UCS Stop | E6 | Reserved |
| 28 | Reserved | 68 | Serial 0 RBUF | A8 | Relocation | E8 | Reserved |
| 2A | Reserved | 6A | Serial 0 TBUF | AA | Reserved | EA | Reserved |
| 2C | Reserved | 6C | Reserved | AC | Reserved | EC | Reserved |
| 2E | Reserved | 6E | Reserved | AE | Reserved | EE | Reserved |
| 30 | Timer 0 Count | 70 | Serial 1 Baud | B0 | Refresh Base | F0 | Reserved |
| 32 | Timer 0 Compare A | 72 | Serial 1 Count | B2 | Refresh Time | F2 | Reserved |
| 34 | Timer 0 Compare B | 74 | Serial 1 Control | B4 | Refresh Control | F4 | Reserved |
| 36 | Timer 0 Control | 76 | Serial 1 Status | B6 | Reserved | F6 | Reserved |
| 38 | Timer 1 Count | 78 | Serial 1 RBUF | B8 | Power Control | F8 | Reserved |
| 3A | Timer 1 Compare A | 7A | Serial 1 TBUF | BA | Reserved | FA | Reserved |
| 3C | Timer 1 Compare B | 7C | Reserved | BC | Step ID (=02h) | FC | Reserved |
| 3E | Timer 1 Control | 7E | Reserved | BE | Reserved | FE | Reserved |

Figure 3 – PCB Register Assignments While in Master Mode

80C187 Interface (TK80C186EB Only)

The TK80C186EB does not support the interface to the external 80C187 math coprocessor. The interface pins are labeled for convenience.

Once Test Mode

The ONCE mode can be activated by forcing the A19 pin low during a processor reset. This in turn forces all input and output pins into a high-impedance state.

Pin Descriptions

VCC - Supply

Positive Power Supply

GND - Supply

Ground

CLKIN - Input

Clock Input. CLKIN is 2X the internal clock speed. CLKIN may be used with OSCOUT to create a crystal oscillator.

OSCOUT - Output

The OSCOUT pin is used with CLKIN to create a crystal oscillator. The OSCOUT pin should be left unconnected when CLKIN is directly driven.

CLKOUT - Output

CLKOUT is a divide-by-two of the CLKIN pin, triggering on every CLKIN falling edge. It is used as the timing references for all processor AC specifications.

RESIN* – Input

RESIN (Reset In) causes the processor to immediately terminate any bus cycle in progress and assume an initialized state. All pins will be driven to a known state, and RESOUT will also be driven active. The rising edge (low-to-high) transition synchronizes CLKOUT with CLKIN before the processor begins fetching opcodes at memory location 0FFFF0H.

RESOUT – Output

RESOUT (Reset Output) indicates the processor is currently in the reset state. RESOUT will remain active as long as RESIN remains active

PDTMR – Bidirectional

The PDTMR (Power-Down Timer) determines the amount of time the processor waits after an exit from power down before resuming normal operation. This pin is normally connected to an external capacitor. The duration of time required will depend on the startup characteristics of the crystal oscillator.

NMI – Input

The NMI (Non-Maskable Interrupt) pin causes a Type 2 interrupt to be serviced by the CPU. NMI is latched internally.

TEST* / BUSY – Input

The TEST* / BUSY pin is used during the execution of the WAIT instruction to suspend CPU operation until the pin is sampled active (low). This pin also receives the BUSY signal from the 80C187 Numerics Coprocessor.

AD15 – AD0 – Bidirectional

These pins provide a multiplexed Address and Data bus. During the address phase of the bus cycle, address bits 0 through 15 are presented on the bus and can be latched using ALE. 8- or 16-bit data information is transferred during the data phase of the bus cycle. In the -188 versions, pins AD8 to AD15 provide valid address information for the entire cycle.

A19 / ONCE* - A16 – Output

These pins provide multiplexed Address during the address phase of the bus cycle. Address bits 16 through 19 are presented on these pins and can be latched using ALE. These pins are driven to a logic 0 during the data phase of the bus cycle.

Forcing A19 low during reset triggers the ONCE mode.

S2, S1, S0 – Output

Bus cycle Status are encoded on these pins to provide bus transaction information. S2-S0 are encoded as follows:

| S2 | S1 | S0 | Bus Cycle Initiated |
|----|----|----|---------------------------|
| 0 | 0 | 0 | Interrupt Acknowledge |
| 0 | 0 | 1 | Read I/O |
| 0 | 1 | 0 | Write I/O |
| 0 | 1 | 1 | Processor HALT |
| 1 | 0 | 0 | Queue Instruction Fetch |
| 1 | 0 | 1 | Read Memory |
| 1 | 1 | 0 | Write Memory |
| 1 | 1 | 1 | Passive (no bus activity) |

ALE – Output

Address Latch Enable output is used to latch address information during the address phase of the bus cycle.

BHE* – Output

Byte High Enable output to indicate that the bus cycle in progress is transferring data over the upper half of the data bus. BHE and A0 have the following logical encoding:

| A0 | BHE | Encoding (80C186EB Only) |
|----|-----|--------------------------|
| 0 | 0 | Word Transfer |
| 0 | 1 | Even Byte Transfer |
| 1 | 0 | Odd Byte Transfer |
| 1 | 1 | Refresh Operation |

On the 80C188EB/80L188EB, RFSH is asserted low to indicate a Refresh bus cycle.

RD* – Output

The RD* (Read) output signals that the accessed memory or I/O device must drive data information onto the data bus.

WR* – Output

The WR* (Write) output signals that data available on the data bus are to be written into the accessed memory or I/O device.

READY – Input

READY is an input to signal for the end of a bus cycle. READY must be active to terminate any processor bus cycle, unless it is ignored due to the programming of the Chip Select Unit.

DEN* – Output

The DEN* (Data Enable) output controls the enable of bidirectional transceivers in a buffered. DEN* is active only when data is to be transferred on the bus.

DT/R – Output

The DT* / R (Data Transmit/Receive) output controls the direction of a bidirectional buffer in a buffered system. DT/R is only available on the PLCC 84 package.

LOCK* – Output

LOCK* output indicates that the bus cycle in progress is not to be interrupted. The processor will not service other bus requests (such as HOLD) while LOCK* is active. This pin is configured as a weakly held high input while RESIN is active and must not be driven low.

HOLD – Input

HOLD request input to signal that an external bus master wishes to gain control of the local bus. The processor will relinquish control of the local bus between instruction boundaries not conditioned by a LOCK prefix.

HLDA – Output

The HLDA (Hold Acknowledge) output indicates that the processor has relinquished control of the local bus. When HLDA is asserted, the processor has floated its data bus and control signals allowing another bus master to drive the signals directly.

NCS* – NC

The NCS* (Numeric Coprocessor Select) pin accesses the Numeric Coprocessor. This pin is not supported in the Tekmos design.

ERROR* – NC

The ERROR pin indicates that the last numeric coprocessor operation resulted in an exception condition. This pin is not supported in the Tekmos design.

PEREQ – NC

The PEREQ (Coprocessor Request) input signals that a data transfer between the external coprocessor and memory is pending. This pin is not supported in the Tekmos design.

UCS* – Output

Upper Chip Select will go active whenever the address of a memory or I/O bus cycle is within the address limitations programmed by the user. After reset, UCS* is configured to be active for memory accesses between 0FFC00H and 0FFFFFFH. During a processor reset, UCS* and LCS* are used to enable ONCE Mode.

LCS* – Output

Lower Chip Select will go active whenever the address of a memory bus cycle is within the address limitations programmed by the user. LCS is inactive after a reset.

P1.0 – P1.7 / GCS0* - GCS7*– Output

These pins provide a multiplexed function. If enabled, each pin can provide a generic chip select function. When not programmed as a chip select, each pin can function as a general purpose output port. As an output port, each pin can be read internally.

T0OUT, T1OUT – Output

The Timer Output pins can be programmed to provide a single clock or continuous waveform generation, depending on the timer mode selected.

T0IN, T1IN – Input

The Timer Inputs are used either as clock or control signals, depending on the timer mode selected.

INT0, INT1, INT4 – Input

Maskable Interrupt inputs will cause a vector to a specific Type interrupt routine. To allow interrupt expansion, INT0 and/or INT1 can be used with INTA0 and INTA1 to interface with an external slave controller.

INT2 / INTA0*, INT3 / INTA1* – Bidirectional

These pins provide multiplexed functions. As inputs, they provide a maskable interrupt that will cause the CPU to vector to a specific Type interrupt routine. As outputs, each is programmatically controlled to provide an interrupt acknowledge handshake signal to allow interrupt expansion.

P2.7 / P2.6 – Bidirectional

These pins are bidirectional, open drain, general purpose port pins.

CTS0*, P2.4 / CTS1* - Input

The Clear-To-Send function controls transmission on their respective serial channel.

TXD0, P2.1 / TXD1 – Output

These pins provide the Transmit Data for the serial channels. When operating in Mode 0, these pins provide the clock for the synchronous data on the RXD pins.

RXD0, P2.0 / RXD1 – Bidirectional

These pins are the receive data for the serial channels. In mode 0, these pins become bidirectional.

P2.5 / BCLK0, P2.2 / BCLK1 – Input

These pins provide an external baud clock for the serial channels.

P2.3 / SINT1 – Output

This is the serial interrupt for channel 1.

Reset Operation

Basic Operation

The reset pin is synchronized internally before it is applied to the rest of the circuit. This means that the clocks must be operating while RESIN* is low to insure correct initialization of the device.


Cold Reset

It is important to insure that RESIN* remain active until the clocks have stabilized, If a RC reset circuit is used, the RC time constant must be longer than the power supply rise time.

Warm Reset


RESIN* must be remain low for four CLKOUT periods to take effect. A reset will terminate all activity and bus cycles.

Cold Reset Waveforms

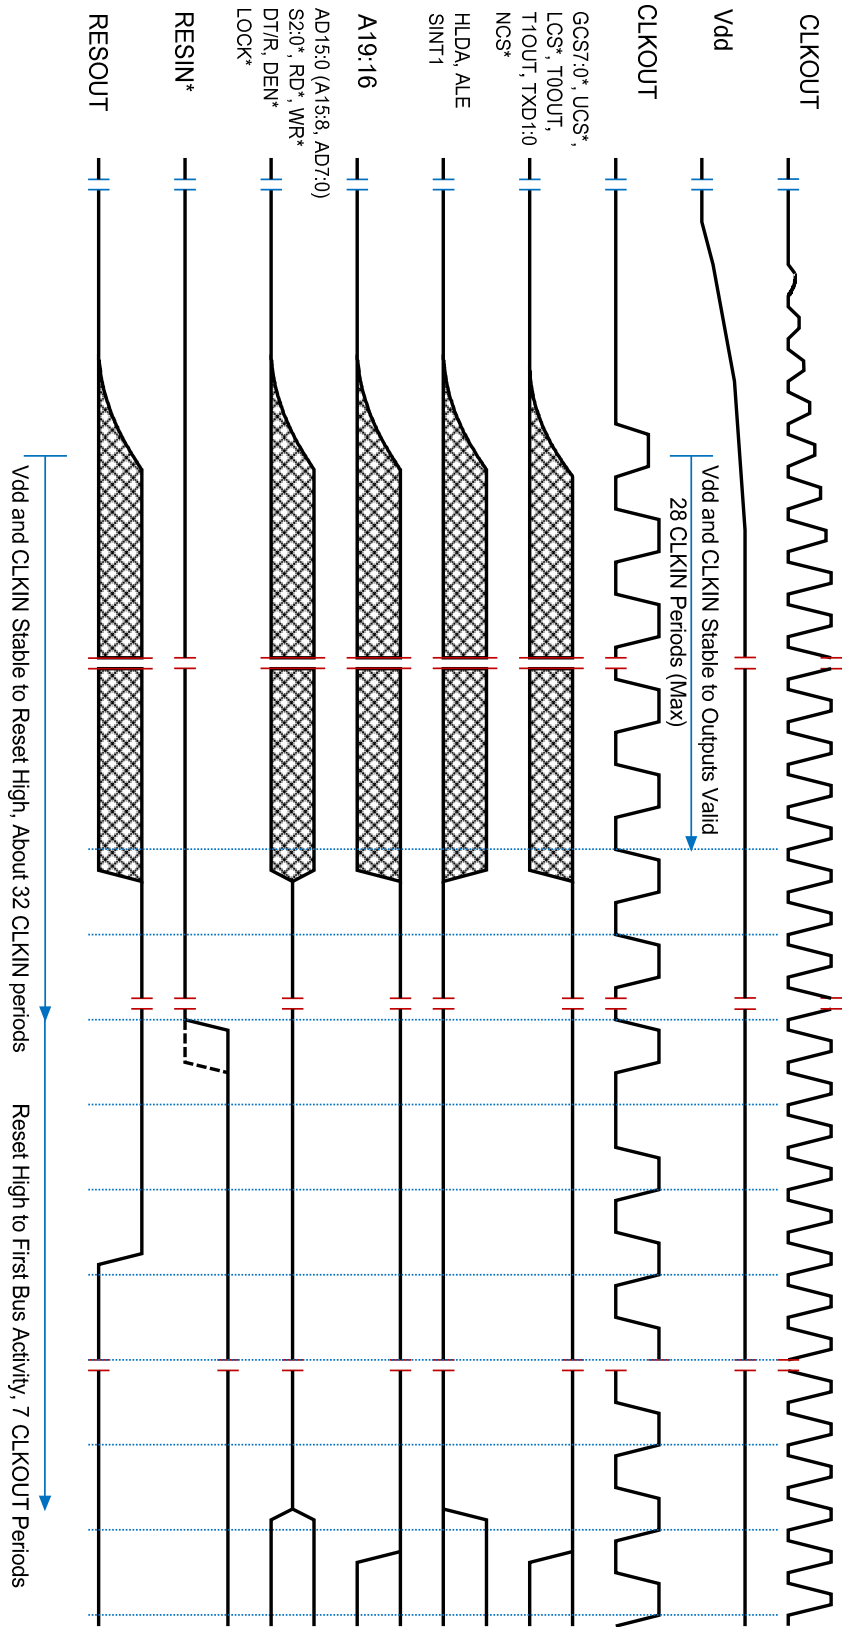

Note:
 CLKOUT synchronization occurs on the rising edge of RESIN*. If RESIN* is sampled high while CLKOUT is high (solid line), then CLKOUT will remain low for two CLKIN periods. If RESIN* is sampled high while CLKOUT is low (dashed line), then CLKOUT will not be affected.
 Pin names in parentheses apply to 80C188EB.

Cold Reset Waveforms

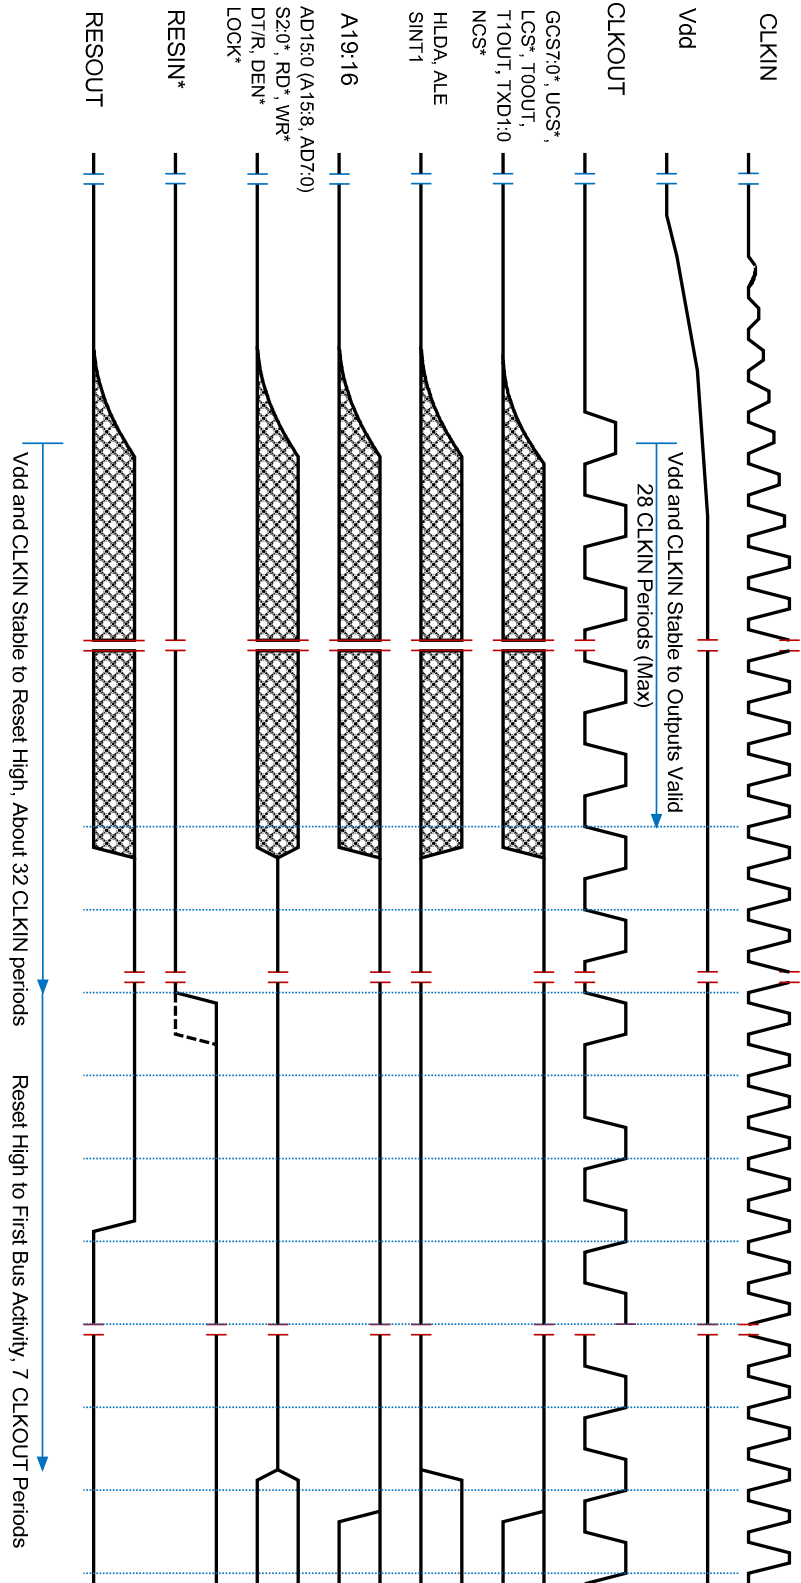

Note:
 CLKOUT synchronization occurs on the rising edge of RESIN*. If RESIN* is sampled high while CLKOUT is high (solid line), then CLKOUT will remain low for two CLKIN periods. If RESIN* is sampled high while CLKOUT is low (dashed line), then CLKOUT will not be affected.
 Pin names in parentheses apply to 80C188EB.

Pinout

| SQFP 80 | PQFP 80 | PLCC 84 | 80C186 | 80C 188 |
|------------|------------|------------|---------------|------------|
| 1 | 44 | 12 | HLDA | |
| 2 | 45 | 13 | HOLD | |
| 3 | 46 | 14 | TEST* / BUSY | |
| 4 | 47 | 15 | LOCK* | |
| | | 16 | DT/R* | |
| 5 | 48 | 17 | NMI | |
| 6 | 49 | 18 | READY | |
| 7 | 50 | 19 | P1.7 / GCS7* | |
| 8 | 51 | 20 | P1.6 / GCS6* | |
| 9 | 52 | 21 | P1.5 / GCS5* | |
| 10 | 53 | 22 | VSS | |
| 11 | 54 | 23 | VDD | |
| 12 | 55 | 24 | P1.4 / GCS4* | |
| 13 | 56 | 25 | P1.3 / GCS3* | |
| 14 | 57 | 26 | P1.2 / GCS2* | |
| 15 | 58 | 27 | P1.1 / GCS1* | |
| 16 | 59 | 28 | P1.0 / GCS0* | |
| 17 | 60 | 29 | LCS* | |
| 18 | 61 | 30 | UCS* | |
| 19 | 62 | 31 | INT0 | |
| 20 | 63 | 32 | INT1 | |
| 21 | 64 | 33 | INT2 / INTA0* | |
| 22 | 65 | 34 | INT3 / INTA1* | |
| 23 | 66 | 35 | INT4 | |
| 24 | 67 | 36 | PDTMR | |
| 25 | 68 | 37 | RESIN* | |
| 26 | 69 | 38 | RESOUT | |
| | | 39 | PEREQ | NC |
| 27 | 70 | 40 | OSCOOUT | |
| 28 | 71 | 41 | CLKIN | |
| 29 | 72 | 42 | VDD | |
| 30 | 73 | 43 | VSS | |
| 31 | 74 | 44 | CLKOUT | |
| 32 | 75 | 45 | T0OUT | |
| 33 | 76 | 46 | T0IN | |
| 34 | 77 | 47 | T1OUT | |
| 35 | 78 | 48 | T1IN | |
| 36 | 79 | 49 | P2.7 | |
| 37 | 80 | 50 | P2.6 | |
| 38 | 1 | 51 | CTS0* | |
| 39 | 2 | 52 | TXD0 | |
| 40 | 3 | 53 | RXD0 | |

| SQFP 80 | PQFP 80 | PLCC 84 | 80C186 | 80C 188 |
|------------|------------|------------|--------------|------------|
| 41 | 4 | 54 | P2.5 / BCLK0 | |
| 42 | 5 | 55 | P2.3 / SINT1 | |
| 43 | 6 | 56 | P2.4 / CTS1* | |
| 44 | 7 | 57 | P2.0 / RXD1 | |
| 45 | 8 | 58 | P2.1 / TXD1 | |
| 46 | 9 | 59 | P2.2 / BCLK1 | |
| | | 60 | NCS* | NC |
| 47 | 10 | 61 | AD0 | |
| 48 | 11 | 62 | AD8 | A8 |
| 49 | 12 | 63 | VSS | |
| 50 | 13 | 64 | VDD | |
| 51 | 14 | 65 | VSS | |
| 52 | 15 | 66 | AD1 | |
| 53 | 16 | 67 | AD9 | A9 |
| 54 | 17 | 68 | AD2 | |
| 55 | 18 | 69 | AD10 | A10 |
| 56 | 19 | 70 | AD3 | |
| 57 | 20 | 71 | AD11 | A11 |
| 58 | 21 | 72 | AD4 | |
| 59 | 22 | 73 | AD12 | A12 |
| 60 | 23 | 74 | AD5 | |
| 61 | 24 | 75 | AD13 | A13 |
| 62 | 25 | 76 | AD6 | |
| 63 | 26 | 77 | AD14 | A14 |
| 64 | 27 | 78 | AD7 | |
| 65 | 28 | 79 | AD15 | A15 |
| 66 | 29 | 80 | A16 | |
| 67 | 30 | 81 | A17 | |
| 68 | 31 | 82 | A18 | |
| 69 | 32 | 83 | A19 / ONCE | |
| 70 | 33 | 84 | VSS | |
| 71 | 34 | 1 | VDD | |
| 72 | 35 | 2 | VSS | |
| | | 3 | ERROR* | NC |
| 73 | 36 | 4 | RD* | |
| 74 | 37 | 5 | WR* | |
| 75 | 38 | 6 | ALE | |
| 76 | 39 | 7 | BHE* | RFSH* |
| 77 | 40 | 8 | S2* | |
| 78 | 41 | 9 | S1* | |
| 79 | 42 | 10 | S0* | |
| 80 | 43 | 11 | DEN* | |

Electrical Specifications

Maximum Ratings

| Characteristics | Symbol | Min | Max | Unit | |
|-----------------------------|------------------|-----------------------|-----------------------|------|----|
| Supply Voltage | V _{DD} | -0.5 | 5.5 | V | |
| Input Voltage | V _{IN} | V _{SS} - 0.3 | V _{DD} + 0.3 | V | |
| Current Drain per Pin | I _{OL} | | 15 | mA | |
| Operating Temperature Range | Commercial | T _{ac} | 0 | 70 | °C |
| | Industrial | T _{ai} | -40 | 85 | °C |
| Storage Temperature range | T _{stg} | -55 | +150 | °C | |

DC Electrical Specifications (V_{DD} = 5.0 V +/- 10%, V_{SS} = 0 V, T_a = 0°C to +70°C)

| Characteristics | Condition | Symbol | Min | Max | Unit |
|---|--|------------------|-----------------------|-----------------------|------|
| Supply Voltage | | V _{DD} | 4.5 | 5.5 | V |
| Input Low Voltage | | V _{IL} | -0.5 | 0.3 * V _{DD} | V |
| Input High Voltage | | V _{IH} | 0.7 * V _{DD} | 5.5 | V |
| Output Low Voltage | I _{ol} = 3 mA | V _{OL} | 0.0 | 0.45 | V |
| Output High Voltage | I _{oh} = -2 mA | V _{OH} | V _{DD} - 0.5 | V _{DD} | V |
| Input Hysteresis on /RESIN | | V _{HYR} | 0.50 | | V |
| Input Leakage Current for Pins: AD15:0, READY, HOLD, RESIN*, CLKIN, TEST*, NMI, INT4:0, T0IN, T1IN, RXD0, BCLK0, CTS0*, RXD1, BCLK1, CTS1*, SINT1, P2.6, P2.7 | 0 < V _{IN} < V _{DD} | I _{IL1} | -15 | +15 | uA |
| Input Leakage Current for Pins: A19/ONCE*, A18:A16, LOCK* | Note 1 | I _{IL3} | -0.275 | -5.0 | mA |
| Output Leakage Current | 0.45 < V _{OUT} < V _{DD} Note 2 | I _{OL} | -15 | 15 | uA |
| Supply Current Cold (RESET) 25 MHz 20 MHz 13 MHz | Note 3 | I _{DD} | | 115 | mA |
| | Note 3 | | | 108 | mA |
| | Note 3 | | | 73 | mA |
| Supply Current in Idle Mode 25 MHz 20 MHz 13 MHz | Note 3 | I _{ID} | | 91 | mA |
| | Note 3 | | | 76 | mA |
| | Note 4 | | | 48 | mA |
| Supply Current in Powerdown Mode 25 MHz 20 MHz 13 MHz | Note 3 | I _{PD} | | 100 | uA |
| | Note 3 | | | 100 | uA |
| | Note 3 | | | 100 | uA |
| Output Pin Capacitance | T _F = 1 MHz Note 4 | C _{OUT} | | 15 | pF |
| Input Pin Capacitance | T _F = 1 MHz | C _{IN} | | 15 | pF |

Notes:

1. RD/QSMD, /UCS, /LCS, /LOCK and /TEST/BUSY have an internal pullup that is activated during reset.
2. Output pins are floated during HOLD or ONCE mode.
3. Measured at worst case temperature and V_{DD}, and all outputs loaded.
4. Output capacitance is capacitive load of a floating output pin.

AC Electrical Specifications (V_{dd} = 5.0 V +/- 10%, V_{ss} = 0 V, T_a = 0°C to +70°C)

| Characteristics | Note | Symbol | Min | Max | Unit |
|--|------------|--------------------|-----------|-----------------|------|
| Input Clock | | | | | |
| CLKIN Frequency | 1 | T _F | 0 | 50 | MHz |
| CLKIN Period | 1 | T _C | 20 | | ns |
| CLKIN High Time | 1, 2 | T _{CH} | 8 | | ns |
| CLKIN Low Time | 1, 2 | T _{CL} | 8 | | ns |
| CLKIN Rise Time | 1, 3 | T _{CR} | 1 | 7 | ns |
| CLKIN Fall Time | 1, 3 | T _{CF} | 1 | 7 | ns |
| Output Clock | | | | | |
| CLKIN to CLKOUT Delay | 1, 4 | T _{CD} | 0 | 16 | ns |
| CLKOUT Period | 1 | T | | 2T _C | ns |
| CLKOUT High Time | 1 | T _{PH} | (T/2) - 5 | (T/2) + 5 | ns |
| CLKOUT Low Time | 1 | T _{PL} | (T/2) - 5 | (T/2) + 5 | ns |
| CLKOUT Rise Time | 1, 5 | T _{PR} | 1 | 6 | ns |
| CLKOUT Fall Time | 1, 5 | T _{PF} | 1 | 6 | ns |
| Output Delays | | | | | |
| ALE, S2:0*, DEN*, DT/R, BHE, RFSH, LOCK, A19:16 | 1, 4, 6, 7 | T _{CHOV1} | 3 | 17 | ns |
| GCS7:0*, LCS*, UCS*, RD*, WR* | 1, 4, 6, 8 | T _{CHOV2} | 3 | 20 | ns |
| BHE*, RFSH*, DEN*, LOCK*, RESOUT, HLDA, T0OUT, T1OUT, A19:16 | 1, 4, 6 | T _{CLOV1} | 3 | 17 | ns |
| RD*, WR*, GCS7:0*, LCS*, UCS*, AD15:0, INTA1:0*, S2:0* | 1, 4, 6 | T _{CLOV2} | 3 | 20 | ns |
| RD*, WR*, BHE*, RFSH*, DT/R*, LOCK*, S2:0*, A19:16 | 1 | T _{CHOF} | 0 | 20 | ns |
| DEN*, AD15:0 | 1 | T _{CLOF} | 0 | 20 | ns |
| Synchronous Inputs | | | | | |
| TEST, NMI, INT3:0, T1:0IN, ARDY | 1, 7 | T _{CHIS} | 8 | | ns |
| TEST, NMI, INT3:0, T1:0IN, ARDY | 1, 7 | T _{CHIH} | 3 | | ns |
| AD15:0, ARDY, SRDY, DRQ1:0 | 1, 7 | T _{CLIS} | 10 | | ns |
| AD15:0, ARDY, SRDY, DRQ1:0 | 1, 7 | T _{CLIH} | 3 | | ns |
| HOLD | 1, 7 | T _{CLIS} | 10 | | ns |
| HOLD | 1, 7 | T _{CLIH} | 3 | | ns |
| RESIN (to CLKIN) | 1, 7 | T _{CLIS} | 10 | | ns |
| RESIN (From CLKIN) | 1, 7 | T _{CLIH} | 3 | | ns |

Notes:

1. See AC Waveforms for waveforms and definition
2. Measured at V_{IH} for high time, V_{IL} for low time.
3. Only required to guarantee IDD, Maximum limits are bounded by TC, TCH and TCL.
4. Specified for 50 pF load.
5. TCHOV1 applies to BHE, RFSH LOCK and A19:16 only after a HOLD release
6. TCHOV2 applies to RD and WR only after a HOLD release.
7. Setup and Hold are required to guarantee recognition
8. TCHOVS applies to BHE, RFSH and A19:16 only after a HOLD release.
9. AC measurements made with a 50 pF load, at a 50% supply voltage level.
10. Float delay measured with a 3.3K resistor tied to opposite supply, measured after a +/- 0.2V change in voltage level.

DC Electrical Specifications ($V_{DD} = 3.3\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$, $T_a = 0^\circ\text{C}$ to $+70^\circ\text{C}$)

| Characteristics | Condition | Symbol | Min | Max | Unit |
|---|-------------------------------------|-----------|----------------|----------------|---------------|
| Supply Voltage | | V_{DD} | 3.0 | 5.5 | V |
| Input Low Voltage | | V_{IL} | -0.5 | $0.3 * V_{DD}$ | V |
| Input High Voltage | | V_{IH} | $0.7 * V_{DD}$ | $V_{DD} + 0.5$ | V |
| Output Low Voltage | $I_{OL} = 1.6\text{ mA}$ Note 1 | V_{OL} | 0.0 | 0.45 | V |
| Output High Voltage | $I_{OH} = -1\text{ mA}$ Note 1 | V_{OH} | $V_{DD} - 0.5$ | V_{DD} | V |
| Input Hysteresis on /RESIN | | V_{HYR} | 0.50 | | V |
| Input Leakage Current for Pins: AD15:0, READY, HOLD, RESIN*, CLKIN, TEST*, NMI, INT4:0, T0IN, T1IN, RXD0, BCLK0, CTS0*, RXD1, BCLK1, CTS1*, SINT1, P2.6, P2.7 | $0 < V_{IN} < V_{DD}$ | I_{IL1} | -15 | +15 | μA |
| Input Leakage Current for Pins: A19/ONCE*, A18:A16, LOCK* | Note 2 | I_{IL3} | -0.275 | -2.0 | mA |
| Output Leakage Current | $0.45 < V_{OUT} < V_{DD}$ Note 3 | I_{OL} | -15 | 15 | μA |
| Supply Current Cold (RESET, 3.3V) 16 MHz | Note 4 | I_{DD} | | 54 | mA |
| Supply Current in Idle Mode (3.3V) 16 MHz | Note 5 | I_{ID} | | 38 | mA |
| Supply Current in Powerdown (3.3V) 16 MHz | Note 6 | I_{PD} | | 140 | μA |
| Output Pin Capacitance | $T_F = 1\text{ MHz}$ Note 7 | C_{OUT} | | 15 | pF |
| Input Pin Capacitance | $T_F = 1\text{ MHz}$ | C_{IN} | | 15 | pF |

Notes:

1. I_{OH} and I_{OL} measured at $V_{DD} = 3.0\text{V}$
2. RD/QSMD, /UCS, /LCS, /LOCK and /TEST/BUSY have an internal pullup that is activated during reset.
3. Output pins are floated during HOLD or ONCE mode.
4. Measured during RESET, with worst case frequency, V_{DD} , and temperature, and with all outputs loaded as specified under AC Test Conditions, and all floating outputs driven to a supply.
5. Measured during HALT and IDLE mode active, with worst case frequency, V_{DD} , and temperature, and with all outputs loaded as specified under AC Test Conditions, and all floating outputs driven to a supply.
6. Measured during HALT and Powerdown mode active, with worst case frequency, V_{DD} , and temperature, and with all outputs loaded as specified under AC Test Conditions, and all floating outputs driven to a supply.
7. Output capacitance is capacitive load of a floating output pin.

AC Electrical Specifications (V_{dd} = 3.3 V +/- 10%, V_{ss} = 0 V, T_a = 0°C to +70°C)

| Characteristics | Note | Symbol | Min | Max | Unit |
|--|------------|--------------------|-----------|-----------------|------|
| Input Clock | | | | | |
| CLKIN Frequency | 1 | T _F | 0 | 32 | MHz |
| CLKIN Period | 1 | T _C | 31.25 | | ns |
| CLKIN High Time | 1, 2 | T _{CH} | 13 | | ns |
| CLKIN Low Time | 1, 2 | T _{CL} | 13 | | ns |
| CLKIN Rise Time | 1, 3 | T _{CR} | 1 | 8 | ns |
| CLKIN Fall Time | 1, 3 | T _{CF} | 1 | 8 | ns |
| Output Clock | | | | | |
| CLKIN to CLKOUT Delay | 1, 4 | T _{CD} | 0 | 30 | ns |
| CLKOUT Period | 1 | T | | 2T _C | ns |
| CLKOUT High Time | 1 | T _{PH} | (T/2) - 5 | (T/2) + 5 | ns |
| CLKOUT Low Time | 1 | T _{PL} | (T/2) - 5 | (T/2) + 5 | ns |
| CLKOUT Rise Time | 1, 5 | T _{PR} | 1 | 9 | ns |
| CLKOUT Fall Time | 1, 5 | T _{PF} | 1 | 9 | ns |
| Output Delays | | | | | |
| DT/R, RFSH, LOCK, A19:16 | 1, 4, 6, 7 | T _{CHOV1} | 3 | 22 | ns |
| GCS7:0*, LCS*, UCS*, RD*, WR* | 1, 4, 6, 8 | T _{CHOV2} | 3 | 27 | ns |
| BHE*, DEN* | 1, 4 | T _{CHOV3} | 3 | 25 | ns |
| ALE | 1, 4 | T _{CHOV4} | 3 | 30 | ns |
| S2:0* | 1, 4 | T _{CHOV5} | 3 | 33 | ns |
| LOCK*, RESOUT, HLDA, T0OUT, T1OUT, A19:16 | 1, 4, 6 | T _{CLOV1} | 3 | 25 | ns |
| RD*, WR*, GCS7:0*, LCS*, UCS*, AD15:0, INTA1:0* | 1, 4, 6 | T _{CLOV2} | 3 | 30 | ns |
| BHE*, DEN*, RFSH*, S2:0* | 1, 4, 6 | T _{CLOV3} | 3 | 25 | ns |
| S2:0* | 1, 4, 6 | T _{CLOV5} | 3 | 33 | ns |
| RD*, WR*, BHE*, RFSH*, DT/R*, LOCK*, S2:0*, A19:16 | 1 | T _{CHOF} | 0 | 30 | ns |
| DEN*, AD15:0 | 1 | T _{CLOF} | 0 | 30 | ns |
| Synchronous Inputs | | | | | |
| TEST, NMI, INT3:0, T1:0IN, ARDY | 1, 7 | T _{CHIS} | 15 | | ns |
| TEST, NMI, INT3:0, T1:0IN, ARDY | 1, 7 | T _{CHIH} | 3 | | ns |
| AD15:0, ARDY, SRDY, DRQ1:0 | 1, 7 | T _{CLIS} | 15 | | ns |
| AD15:0, ARDY, SRDY, DRQ1:0 | 1, 7 | T _{CLIH} | 3 | | ns |
| HOLD | 1, 7 | T _{CLIS} | 15 | | ns |
| HOLD | 1, 7 | T _{CLIH} | 3 | | ns |
| RESIN (to CLKIN) | 1, 7 | T _{CLIS} | 15 | | ns |
| RESIN (From CLKIN) | 1, 7 | T _{CLIH} | 3 | | ns |

Notes:




1. See AC Waveforms for waveforms and definition
2. Measured at V_{IH} for high time, V_{IL} for low time.
3. Only required to guarantee IDD, Maximum limits are bounded by T_C, T_{CH} and T_{CL}.
4. Specified for 50 pF load.
5. Specified for 50 pF load.
6. See Rise and Fall time waveform.
7. T_{CHOV1} applies to BHE, RFSH LOCK and A19:16 only after a HOLD release
8. T_{CHOV2} applies to RD and WR only after a HOLD release.
9. Setup and Hold are required to guarantee recognition
10. Setup and Hold are required for proper operation


AC Electrical Specifications (V_{dd} = 5.0 V +/- 10%, V_{ss} = 0 V, T_a = 0°C to +70°C)


| Characteristics | Note | Symbol | Min | Max | Unit |
|-----------------------------------|------|-------------------|-------------|-----|------|
| Relative Timings | | | | | |
| ALE Rising to ALE Falling | | T _{LHLL} | T - 15 | | ns |
| Address Valid to ALE Falling | | T _{AVLL} | (T/2) - 10 | | ns |
| Chip Selects Valid to ALE Falling | 1 | T _{PLLL} | (T/2) - 10 | | ns |
| Address Hold form ALE Falling | | T _{LLAX} | (T/2) - 10 | | ns |
| ALE Falling to WR* Falling | 1 | T _{LLWL} | (T/2) - 15 | | ns |
| ALE Falling to RD* Falling | 1 | T _{LLRL} | (T/2) - 15 | | ns |
| WR* Rising to ALE Rising | 1 | T _{WHLH} | (T/2) - 10 | | ns |
| Address Float to RD* Falling | | T _{AFRL} | 0 | | ns |
| RD* Falling to RD* Rising | 2 | T _{RLRH} | (2*T) - 5 | | ns |
| WR* Falling to WR* Rising | 2 | T _{WLWH} | (2*T) - 5 | | ns |
| RD* Rising to Address Active | | T _{RHAV} | T - 15 | | ns |
| Output Data Hold after WR Rising | | T _{WHDX} | T - 15 | | ns |
| WR* Rising to Chip Select Rising | 1 | T _{WHPH} | 3(T/2) - 10 | | ns |
| RD* Rising to Chip Select Rising | 1 | T _{RHPH} | (T/2) - 10 | | ns |
| CS* Inactive to CS* Active | 1 | T _{PHPL} | (T/2) - 10 | | ns |
| ONCE* Active to RESIN* Rising | 3 | T _{OVRH} | T | | ns |
| ONCE* Hold from RESIN* Rising | 3 | T _{RHOX} | T | | ns |


Notes:

1. Assumes equal loading on both pins.
2. Can be extended using wait states.
3. Not tested

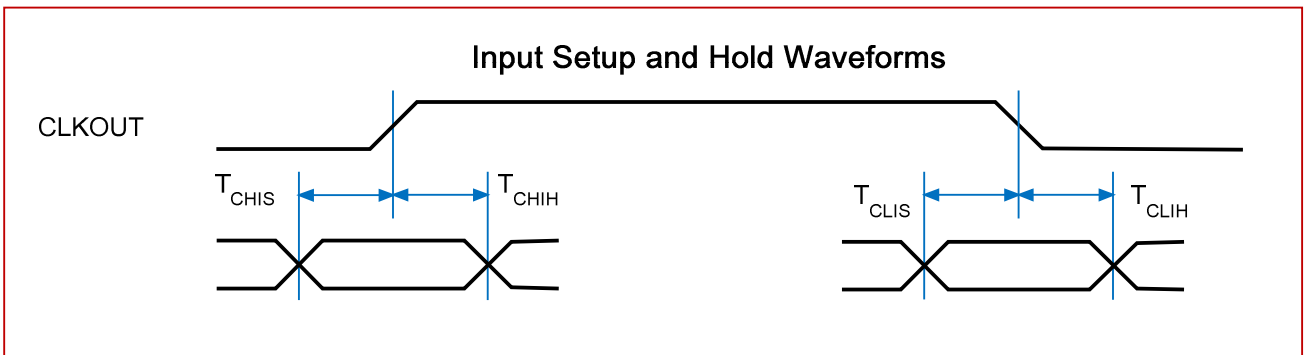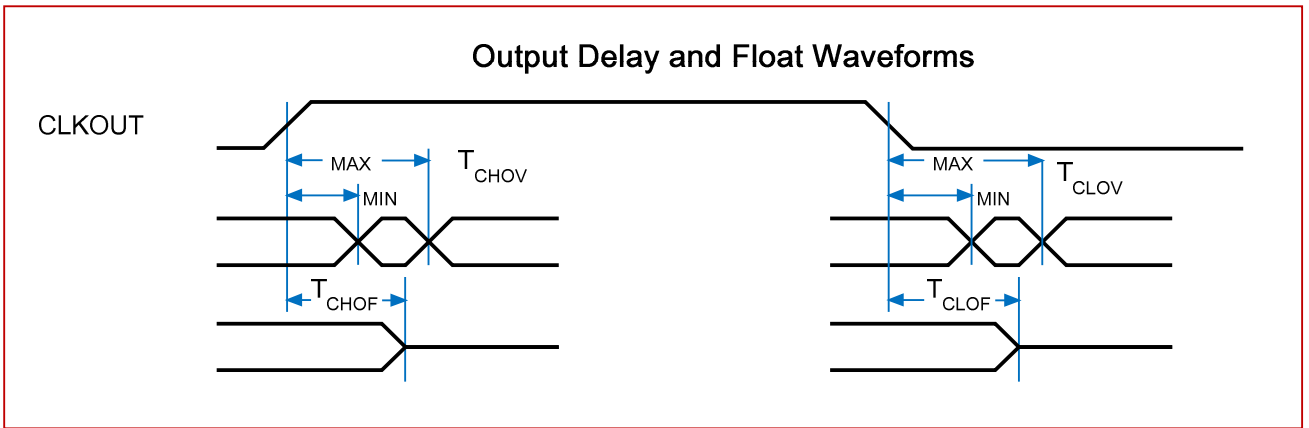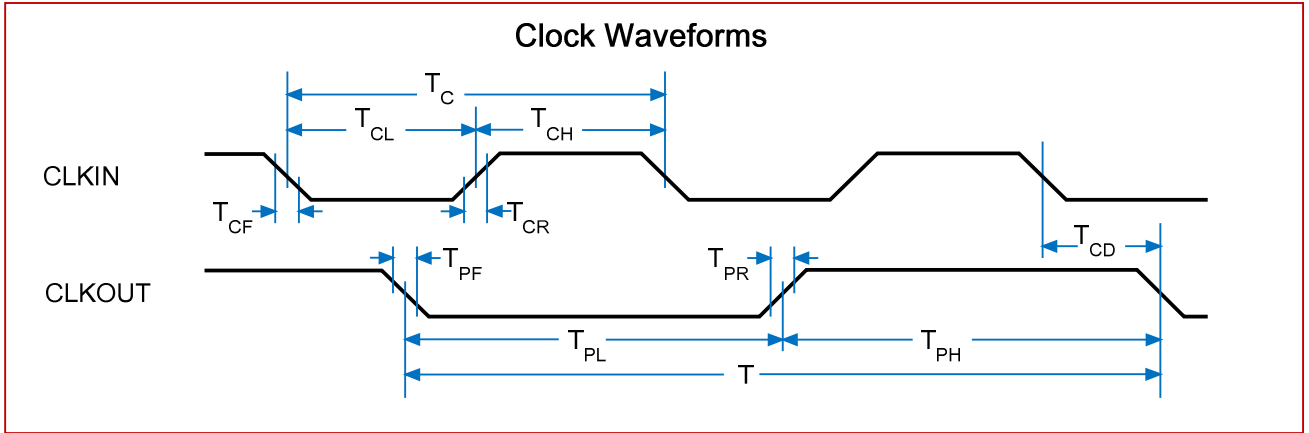

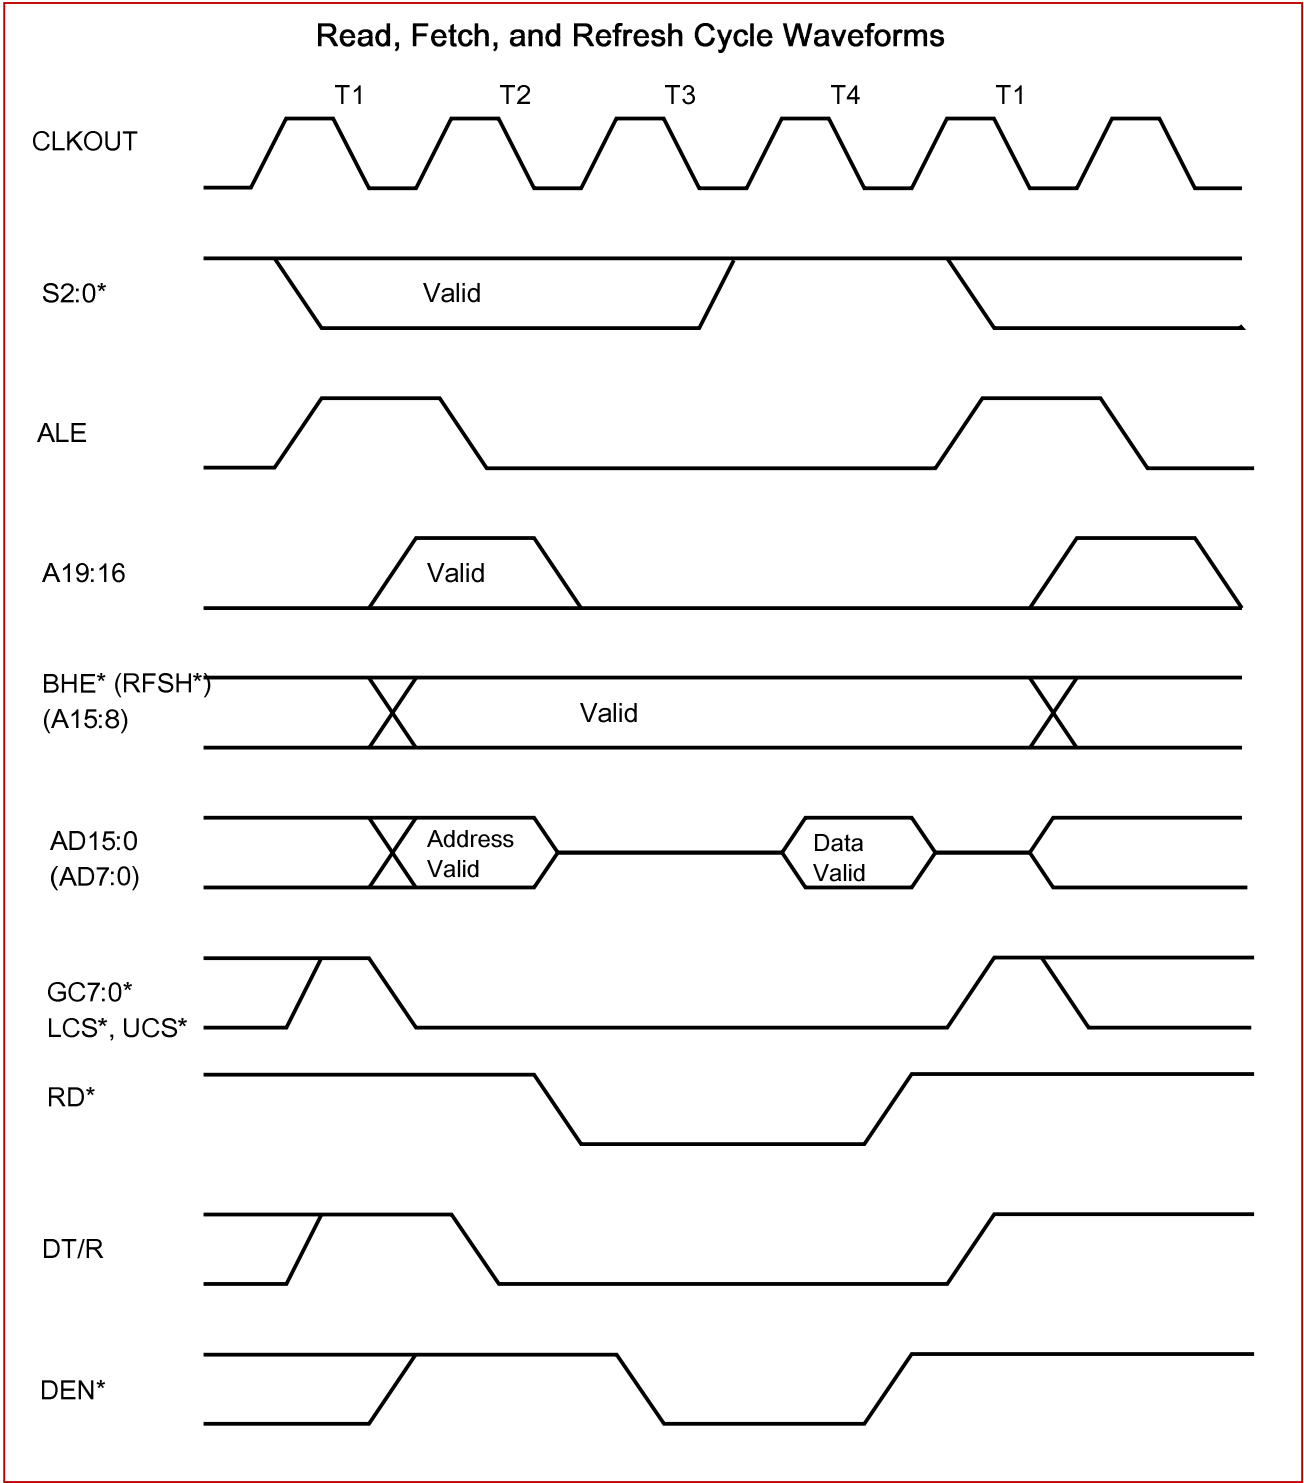

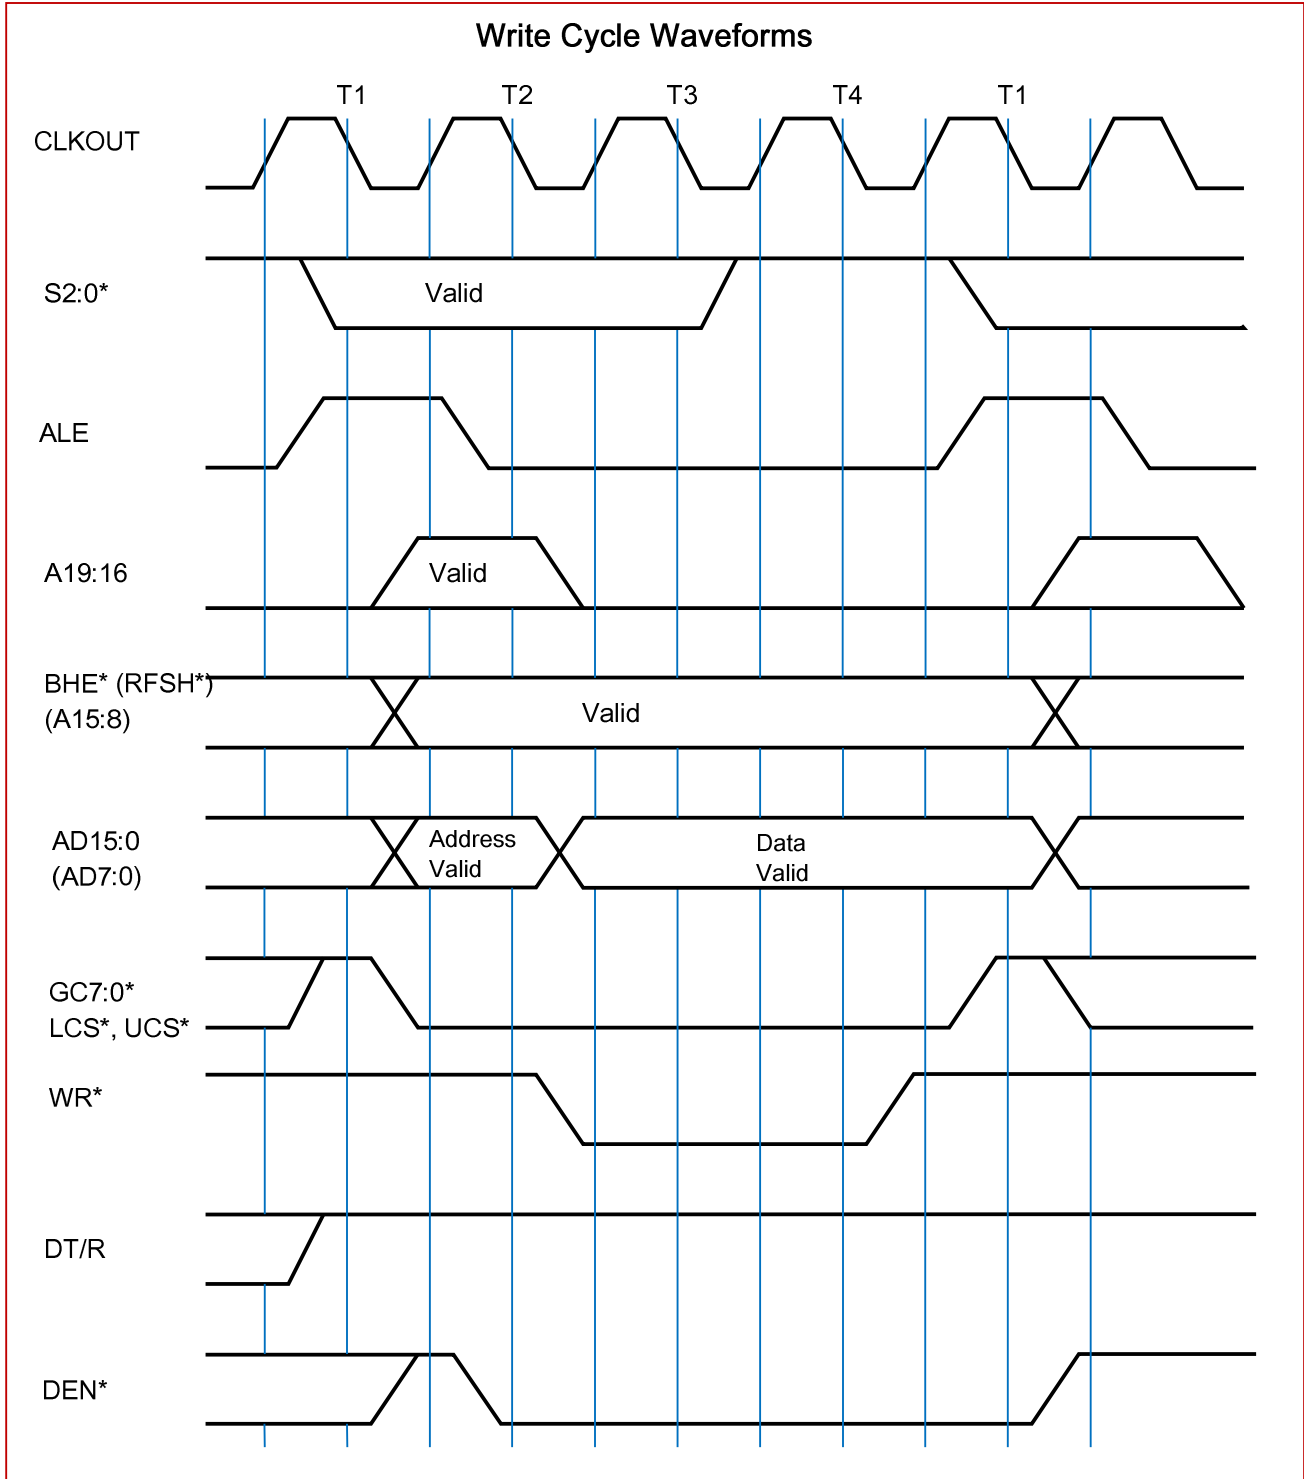

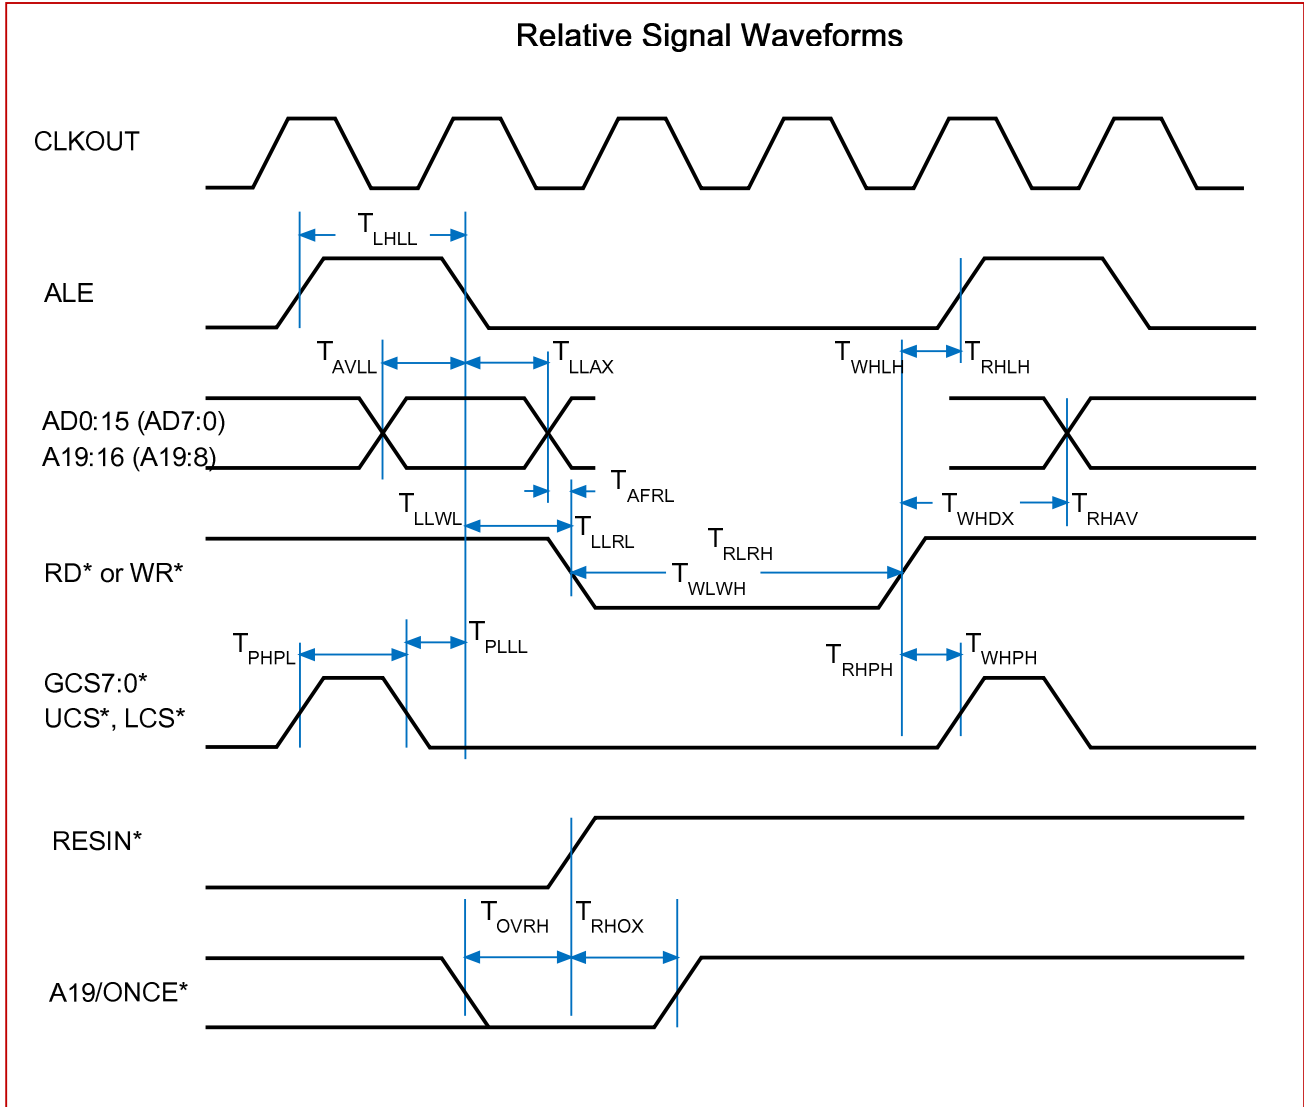

Errata

1. The RESIN* pin uses a standard CMOS input. It is supposed to have a Schmitt trigger.
2. The ability to read the status of an external level sensitive interrupt is blocked by the mask bits. This can affect some polled interrupt applications.
3. The chip select signals are unnecessarily extended beyond the write strobes.
4. The READY pin on the TK80C186/EB does not extend the bus cycle. This is because the READY input is incorrectly connected to the Chip Select Unit. To extend a bus cycle for an external access, the work around is to program the appropriate chip select register (UCSST, LCSST, GCSxST). This solution has an upper limit of 15 Wait States.

All errata will be corrected in the next revision.

Ordering Information

| Code | Temperature | Package | Frequency | Replaces |
|------------------|-------------|------------------------|-----------|---------------|
| TK80C186EB-25CA | 0 to +70 | Plastic 84 PLCC – RoHS | 25 MHz | N80C186EB25 |
| TK80C186EB-25CB | 0 to +70 | Plastic 80 PQFP – RoHS | 25 MHz | S80C186EB25 |
| TK80C186EB-25CT | 0 to +70 | Plastic 80 TQFP – RoHS | 25 MHz | SB80C186EB25 |
| TK80C186EB-25IA | -40 to +85 | Plastic 84 PLCC – RoHS | 25 MHz | TN80C186EB25 |
| TK80C186EB-25IB | -40 to +85 | Plastic 80 PQFP – RoHS | 25 MHz | TS80C186EB25 |
| TK80C186EB-25IT | -40 to +85 | Plastic 80 TQFP – RoHS | 25 MHz | TSB80C186EB25 |
| | | | | |
| TK80C188EB-25CA | 0 to +70 | Plastic 84 PLCC – RoHS | 25 MHz | N80C188EB25 |
| TK80C188EB-25CB | 0 to +70 | Plastic 80 PQFP – RoHS | 25 MHz | S80C188EB25 |
| TK80C188EB-25CT | 0 to +70 | Plastic 80 TQFP – RoHS | 25 MHz | SB80C188EB25 |
| TK80C188EB-25IA | -40 to +85 | Plastic 84 PLCC – RoHS | 25 MHz | TN80C188EB25 |
| TK80C188EB-25IB | -40 to +85 | Plastic 80 PQFP – RoHS | 25 MHz | TS80C188EB25 |
| TK80C188EB-25IT | -40 to +85 | Plastic 80 TQFP – RoHS | 25 MHz | TSB80C188EB25 |
| | | | | |
| TK80C188EB-25ITR | -40 to +85 | Plastic 80 TQFP –RoHS | 25 MHz | Step ID = 5 |

Contact Information

The TK80C186 series may be ordered directly from Tekmos

Tekmos, Inc.
 4120 Commercial Center Drive
 Suite 400
 Austin, TX 78744

512 342-9871 phone
 512 342-9873 fax
 Sales@Tekmos.Com
 www.Tekmos.com

Revision History

| Date | Revision | Description |
|----------|----------|--|
| 2/09/09 | 1.0 | Initial release |
| 9/28/09 | 1.1 | Fix error in interrupt description |
| 10/01/09 | 1.2 | Add Non-RoHS version with Step ID = 5 |
| 4/05/10 | 1.3 | Add errata, 3.3v specifications, expand timing diagrams, reset |
| 8/03/11 | 1.4 | Add errata, correct reset timing diagrams |
| 11/02/11 | 1.5 | Change “R” version to RoHS |

© 2011 Tekmos, Inc.

Information contained in this publication regarding device applications and the like is intended for suggestion only and may be superseded by updates. No representation or warranty is given and no liability is assumed by Tekmos Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Tekmos’ products as critical components in life support systems is not authorized except with express written approval by Tekmos. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights. The Tekmos logo and name are registered trademarks of Tekmos, Inc. All rights reserved. All other trademarks mentioned herein are the property of their respective companies. All rights reserved.

Terms and product names in this document may be trademarks of others.