## For PC Card

## Soldering type 15-contacts female cable connector with backshell RMC-E15FB-BSL()N-M()()

**Vertical Housing for Cables** 

**Soldering** 

Conforming to PCMCIA/JEITA



Configuration of product Part No.

## RMC-E 15 FB-BSL()N-M()()

(2) ① Series name

- ② E: EMI-filtered
- No. of contacts: 15FB: Soldering type, female, for thin wire (AWG#28, #30)
- ⑤ Forms of housings BSLAN: Outside diameter of cable is 4.0 - 4.5 mm.

BSLCN: Outside diameter of cable is 3.0 - 3.5 mm.


® M: One-piece molded key

⑦ Forms and locations of kevs Forms: A: A type, B: B type Locations: 12: 12, 13: 13, 23: 23, key-less

® Insulator colors of male connectors Applicable only to models with the MB form of key

(For the models with other key forms, these insulator colors are all black.)

Blank: Brown, BK: Black

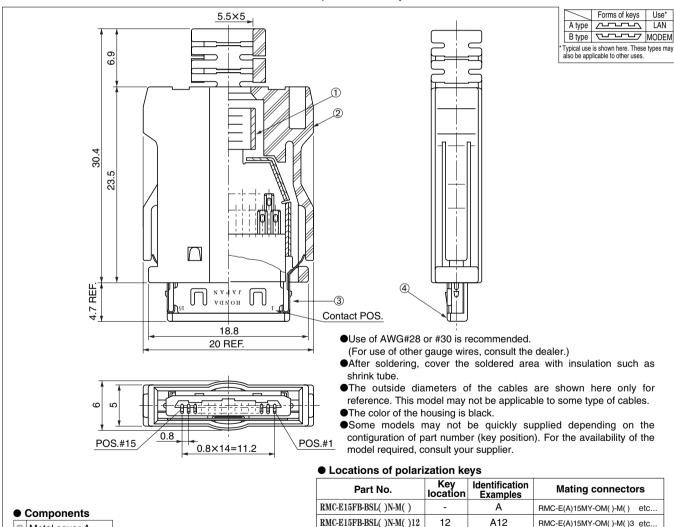

Mating connectors: Refer to the table shown

Tool: (Refer to page Tool-12)

① Metal cover A

3 Metal cover B 4 Female connector

② Housing

RMC-E15FB-BSL()N-M()23

RMC-E15FB-BSL()N-M()13

23

13

A23

A13

RMC-E(A)15MY-OM()-M()1 etc.

RMC-E(A)15MY-OM()-M()2 etc..