

ICP422339PR

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V
 Safety circuit, Connector, **IEC62133 certified**

Specifications

Renata Type	ICP422339
IEC designation	ICP052441
Part Number	100648
Contact method	Molex Connector
Safety Circuit	Yes

Nominal Voltage	3.7 V
Nominal Capacity	340 mAh
Minimum Capacity	330 mAh (0.2C cut off 3.0 V at 20°C)

Internal Impedance < 240 mΩ / 30% SOC

Thickness (t)	Max 4.6 mm
Length (l)	Max 40.5 mm
Width (w)	Max 23.5 mm
Weight	~ 7.3 g

Charging Characteristic

CC/CV – Constant Current / Constant Voltage	
Voltage	4.2 V CV
Current Normal	0.5 C CC – 170 mA
Max. Charging Current	1.0 C CC – 340 mA
Temperature at charging	0 °C 45 °C


Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge current	2.0 C – 680 mA (for non continues discharge) 1.0 C – 340 mA (for continues discharge)
Temperature during discharge	-20 °C ... 60 °C

Cycle life at room temperature > 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)

Storage temperature -20 °C ... 45 °C
 (0 °C ... 30 °C recommended in case of storage for more than 3 months)

Dimensions

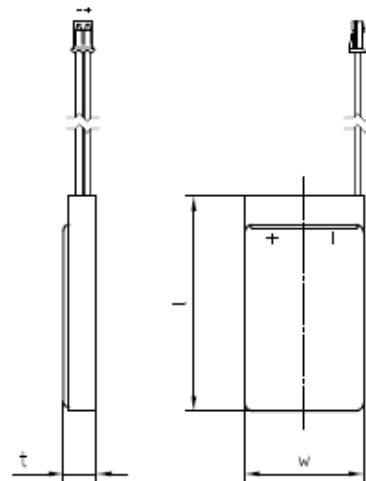

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use