

Z16C35/Z85C35

CMOS ISCC™ INTEGRATED SERIAL COMMUNICATIONS CONTROLLER

FEATURES

- Two General-Purpose SCC Channels, Four DMA Channel; and a Universal Bus Interface Unit.
 - Software Compatible to the Zilog CMOS SCC
 - Four DMA channels; Two Transmit and Two Receive Channels to and from the SCC.
 - Four Gigabyte Address Range per DMA Channel
 - Flyby DMA Transfer Mode
 - Programmable DMA Channel Priorities
 - Independent DMA Register Set
 - A Universal Bus Interface Unit Providing a Simple Interface to Most CPUs with a Multiplexed or Non-Multiplexed bus; Compatible with 680 x 0 and 8 x 86 CPUs.
 - 32-Bit Addresses Multiplexed to 16-Pin Address/Data Lines
 - 8-Bit Data Supporting High/Low Byte Swapping
 - 10 and 16 MHz Timing
 - 68-Pin PLCC
- Supports all Zilog CMOS SCC Features:
- Two Independent, 0 to 4.0 Mbit/Second, Full-Duplex Channels, each with a Separate Crystal Oscillator, Baud Rate Generator, and Digital Phase-Locked Loop Circuit for Clock Recovery.
 - Multi-Protocol Operation Under Program Control; Programmable for NRZ, NRZI, or FM Data Encoding.
 - Asynchronous Mode with Five to Eight Bits and One, One and One-Half, or Two Stop Bits per Character; Programmable Clock Factor; Break Detection and Generation; Parity, Overrun, and Framing Error Detection.
 - Synchronous Mode with Internal or External Character Synchronization on one or two Synchronous Characters and CRC Generation and Checking with CRC-16 or CRC-CCITT Preset to Either 1's or 0's.
 - SDLC/HDLC Mode with Comprehensive Frame-Level Control, Automatic Zero Insertion and Deletion, I-Field Residue Handling, Abort Generation and Detection, CRC Generation and Checking, and SDLC Loop Mode Operation.
 - Local Loopback and Auto Echo Modes
 - Supports T1 Digital Trunk
 - Enhanced SDLC 10 x 19 Status FIFO for DMA Support

GENERAL DESCRIPTION

The Z85C35, directly equivalent to the Z16C35 ISCC, is a CMOS superintegrated device with a flexible Bus Interface Unit (BIU) connecting a built-in Direct Memory Access (DMA) cell to the CMOS Serial Communications Control (SCC) cell.

The ISCC is a dual-channel, multi-protocol data communications peripheral which easily interfaces to CPU's with

either multiplexed or non-multiplexed address and data buses. The advanced CMOS process offers lower power consumption, higher performance, and superior noise immunity. The programming flexibility of the internal registers allow the ISCC to be configured for a wide variety of serial communications applications. The many on-chip features such as, streamlined bus interface, four channel

GENERAL DESCRIPTION (Continued)

DMA, baud rate generators, digital phase-locked loops, and crystal oscillators dramatically reduce the need for external logic. Additional features, including a 10 x 19 bit status FIFO, are added to support high speed SDLC transfers using on-chip DMA controllers (Figure 1).

The ISCC can address up to four gigabytes per DMA channel by using the /UAS and /AS signals to strobe out 32-bit multiplexed addresses.

The ISCC handles asynchronous formats, synchronous byte-oriented protocols such as IBM Bisync, and synchronous bit-oriented protocols such as HDLC and IBM SDLC. This versatile device supports virtually any serial data transfer application (terminals, printers, diskette, tape drives, etc.).

The device can generate and check CRC codes in any synchronous mode and can be programmed to check data integrity in various modes. The ISCC also has facilities for modem controls in both channels. In applications where these controls are not needed, the modem controls can be used for general-purpose I/O.

The standard Zilog interrupt daisy chain is supported for interrupt hierarchy control. Internally, the SCC cell has higher interrupt priority than the DMA cell.

The DMA cell consists of four DMA channels; one for transmit and one for receive to and from each SCC chan-

nel, respectively. The cycle time for each DMA transfer is 400 ns for the 10 MHz version. There is no idle cycle between DMA transfers.

The DMA cell adopts a simple fly-by mode DMA transfer, allowing easy programming of the DMA cell and yet providing a powerful and efficient DMA access. The cell does not support memory-to-memory transfer.

Priorities between the four DMA channels are programmable to custom-fit user applications. Arbitration of Bus priority control signals between the ISCC DMA and other system DMA's should be handled outside the ISCC.

The BIU has a universal interface to most system/CPU bus structures and timing. The first write to the ISCC after a hardware reset will confirm the bus interface type being implemented.

Notes:

All Signals with a preceding front slash, "/", are active Low, e.g., B/W (WORD is active Low); /B/W (BYTE is active Low, only).

Power connections follow conventional descriptions below:

Connection	Circuit	Device
Power	V _{CC}	V _{DD}
Ground	GND	V _{SS}

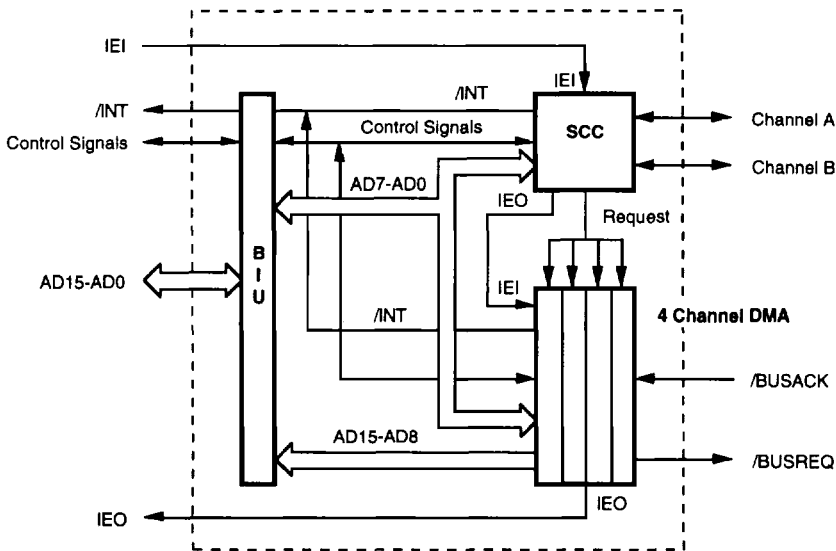


Figure 1. Block Diagram

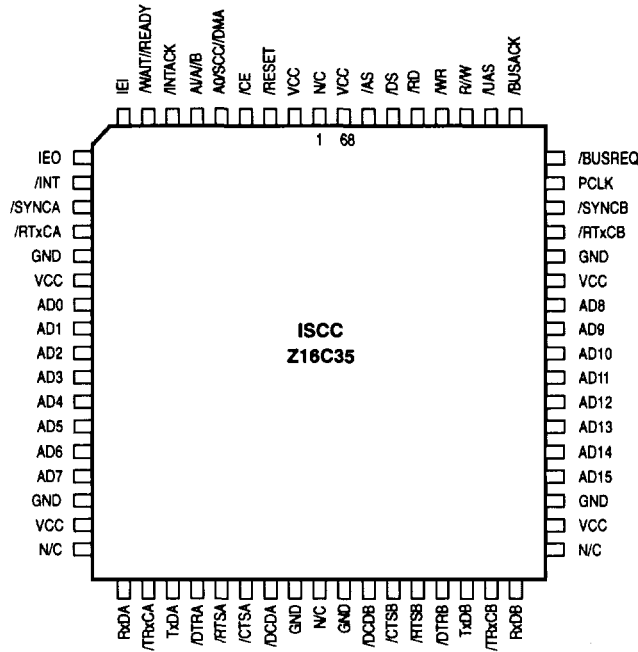


Figure 2. Pin Assignments

PIN DESCRIPTION

The following section describes the Z16C35 pin functions. Figure 2 details the respective pin functions and pin assignments. All references to DMA are internal.

/CTSA, /CTSB *Clear To Send* (inputs, active Low). If these pins are programmed as Auto Enables, a Low on the inputs enables the respective transmitters. If not programmed as Auto Enables, they may be used as general-purpose inputs. Both inputs are Schmitt-trigger buffered to accommodate slow rise-time inputs. The SCC cell detects pulses on these inputs and can interrupt the CPU on both logic level transitions.

/DCDA, /DCDB *Data Carrier Detect* (inputs, active Low). These pins function as receiver enables if they are programmed for Auto Enables; otherwise they are used as general-purpose input pins. Both pins are Schmitt-trigger buffered to accommodate slow rise time signals. The SCC cell detects pulses on these pins and can interrupt the CPU on both logic level transitions.

/DTRA, /DTRB *Data Terminal Ready* (outputs, active Low). These outputs follow the state programmed into the DTR bit.

IEI *Interrupt Enable In* (input, active High). IEI is used with IEO to form an interrupt daisy chain when there is more than one interrupt driven device. A high IEI indicates that no other higher priority device has an interrupt under service or is requesting an interrupt. The SCC cell has a higher interrupt priority than the DMA cell.

IEO *Interrupt Enable Out* (output, active High). IEO is High only if IEI is High and the CPU is not servicing the ISCC (SCC or DMA) interrupt, or the ISCC is not requesting an interrupt (Interrupt Acknowledge cycle only). IEO is connected to the next lower priority device's IEI input and thus inhibits interrupts from lower priority devices.

/INT *Interrupt* (output, active Low). This signal is activated when the SCC or DMA requests an interrupt. Note that /INT is pulled high and is not an open-drain output. This signal tristates at reset.

PIN DESCRIPTION (Continued)

/INTACK *Interrupt Acknowledge* (input, active Low). This is a strobe which indicates that an interrupt acknowledge cycle is in progress. During this cycle, the SCC and DMA interrupt daisy chain is resolved. The device is capable of returning an interrupt vector that may be encoded with the type of interrupt pending during this acknowledge cycle when RD or DS become high. INTACK may be programmed to accept a status acknowledge, a single pulse acknowledge, or a double pulse acknowledge. This is programmed in the Bus Configuration Register (BCR). The double pulse acknowledge is compatible with 8x86 family microprocessors.

PCLK *Clock* (input). This is the master SCC and DMA clock used to synchronize internal signals. PCLK is a TTL level signal. PCLK is not required to have any phase relationship with the master system clock.

RxDA, RxDB *Receive Data* (inputs, active High). These input signals receive serial data at standard TTL levels.

/RTxCA, /RTxCB *Receive/Transmit Clocks* (inputs, active Low). These pins can be programmed to several modes of operation. In each channel, RTxC may supply the receive clock, the transmit clock, the clock for the baud rate generator, or the clock for the Digital Phase-Locked Loop. These pins can also be programmed for use with the respective SYNC pins as a crystal oscillator. The receive clock may be 1, 16, 32, or 64 times the data rate in asynchronous modes.

/RTSA, /RTSB *Request To Send* (outputs, active Low). When the Request To Send (RTS) bit in Write Register 5 is set, the RTS signal goes Low. When the RTS bit is reset in the Asynchronous mode and Auto Enable is on, the signal goes High after the transmitter is empty. In Synchronous mode or in Asynchronous mode with Auto Enable off, the RTS pin strictly follows the state of the RTS bit. Both pins can be used as general-purpose outputs.

/SYNCA, /SYNCB *Synchronization* (inputs or outputs, active Low). These pins can act either as inputs, outputs, or part of the crystal oscillator circuit. In the Asynchronous Receive mode (crystal oscillator option not selected), these pins are inputs similar to CTS and DCD. In this mode, transitions on these lines affect the state of the Synchronous/Hunt status bits in Read Register 0 but have no other function.

In External Synchronization mode with the crystal oscillator not selected, these lines also act as inputs. In this mode, SYNC must be driven Low to receive clock cycles after the last bit in the synchronous character is received. Character assembly begins on the rising edge of the receive clock immediately preceding the activation of SYNC.

In the Internal Synchronization mode (Monosync and Bisync) with the crystal oscillator not selected, these pins act as outputs and are active only during the part of the receive clock cycle in which synchronous condition is not latched. These outputs are active each time a synchronization pattern is recognized (regardless of character boundaries). In SDLC mode, the pins act as outputs and are valid on receipt of a flag.

TxDA, TxDB *Transmit Data* (outputs, active high). These output signals transmit serial data at standard TTL levels.

/TRxCA, /TRxCB *Transmit/Receive Clocks* (inputs or outputs, active Low). These pins can be programmed in several different modes of operation. TRxC may supply the receive clock or the transmit clock in the input mode or supply the output of the Digital Phase-Locked Loop, the crystal oscillator, the baud rate generator, or the transmit clock in the output mode.

/ICE *Chip Enable* (input, active Low). This signal selects the ISCC for a peripheral read or write operation. This signal is not used when the ISCC is bus master.

AD15-AD0 *Data bus* (bidirectional, tri-state). These lines carry data and commands to and from the ISCC.

/RD *Read* (bidirectional, active Low). When the ISCC is a peripheral (i.e. bus slave), this signal indicates a read operation and when the ISCC is selected, enables the ISCC's bus drivers. As an input, /RD indicates that the CPU wants to read from the ISCC read registers. During the Interrupt Acknowledge cycle, /RD gates the interrupt vector onto the bus if the ISCC is the highest priority device requesting an interrupt. When the ISCC is the bus master, this signal is used to read data. As an output, after the ISCC has taken control of the system buses, /RD indicates a DMA-controlled read from a memory or I/O port address.

/WR *Write* (bidirectional, active Low). When the ISCC is selected, this signal indicates a write operation. As an input, this indicates that the CPU wants to write control or command bytes to the ISCC write registers. As an output, after the ISCC has taken control of the system buses /WR indicates a DMA-controlled write to a memory or I/O port address.

/DS *Data Strobe* (bidirectional, active Low). A Low on this signal indicates that the AD15-AD0 bus is used for data transfer. When the ISCC is not in control of the system bus and the external system is transferring information to or from the ISCC, /DS is a timing input used by the ISCC to move data to or from the AD15-AD0 bus. Data is written into the ISCC by the external system on the Low to High /DS transition. Data is read from the ISCC by the external

system while /DS is Low. There are no timing requirements between /DS as an input and ISCC clock; this allows use of the ISCC with a system bus which does not have a bussed clock.

During a DMA operation when the ISCC is in control of the system, DS is an output generated by the ISCC and used by the system to move data to or from the AD15-AD0 bus. When the ISCC has bus control, it writes to the external system by placing data on the AD15-AD0 bus before the High-to-Low DS transition and holds the data stable until after the Low-to-High DS transition; while reading from the external system, the Low-to-High transition of DS inputs data from the AD15-AD0 bus into the ISCC.

R/W Read/Write (bidirectional). Read polarity is High and write polarity is Low. When the ISCC is bus master, R/W indicates the data direction of the current bus transaction, and is stable from when AS is High until the bus transaction ends. When the ISCC is not in control of the system bus and the external system is transferring information to or from the ISCC, R/W is a status input used by the ISCC to determine if data is entering or leaving on the AD15-AD0 bus during /DS time. In such a case, Read (High) indicates that the system is requesting data from the ISCC and Write (Low) indicates that the system is presenting data to the ISCC. The only timing requirements for R/W as an input are defined relative to DS. When the ISCC is in control of the system bus, R/W is an output generated by the ISCC, with Read indicating that data is being requested from the addressed location or device, and Write indicating that data is being presented to the addressed location or device.

/UAS Upper Address Strobe (Output, active Low). This signal is used if the address is more than 16-bit. The upper address, A31-A16, can be latched externally by the rising edge of this signal. /UAS is active first before AS becomes active. This signal and AS are used by the DMA cell.

/AS Lower Address Strobe (Bidirectional, active Low). When the ISCC is bus master, this signal when an output, is used as a lower address strobe for AD15-AD0. It is used in conjunction with UAS since the address is 32-bits. This signal and /UAS are used by the DMA cell when it is bus master. When ISCC is not bus master, this signal is used in the multiplexed bus modes to latch the address on the AD lines. The /AS signal is not used in the non-multiplexed bus modes and should be tied to Vcc in these cases.

/WAIT/RDY Wait/Ready (bidirectional, active Low). It may be programmed to function either as a Wait signal or Ready signal during the BCR write. When the BCR is written to Channel A (A1/A/B High during the BCR write), this signal functions as a WAIT and thus supports the READY function of 8 x 86 microprocessors family. When

the BCR writes to Channel B (A1/A/B Low), this signal functions as a READY and supports the DTACK function of the 680 x 0 microprocessor family.

This signal is an output when the ISCC is not bus master. In this case, the Wait/RDY signal indicates when the data is available during a read cycle; when the device is ready to receive data during a write cycle; and when a valid vector is available during an interrupt acknowledge cycle.

When the ISCC is the bus master (the DMA cell has taken control of the bus), the /WAIT/RDY signal functions as a WAIT or READY input. Slow memories and peripheral devices can assert WAIT to extend /DS during bus transfers. Similarly, memories and peripherals use READY to indicate that its output is valid or that it is ready to latch input data.

/BUSACK Bus Acknowledge (input, active Low). Signals the bus has been released to the DMA. If the /BUSACK is inactive before the DMA transfer is completed, the current DMA transfer is aborted. This signal tri-states at reset.

/BUSREQ Bus Request (output, active Low). This signal is used by the DMA to obtain the bus from the CPU.

A0/SCC/DMA DMA Channel/SCC Select/DMA Select (bidirectional). When this pin is used as input, a high selects the SCC cell and a low selects the DMA cell. When this pin is used as output, the signal on this pin is used in conjunction with A1/A/B pin output to identify which DMA channel is active. This information can be used by the user to determine whether to issue a DMA abort command. A0/SCC/DMA and A1/A/B output encoding is shown below:

A1/A/B	A0/SCC/DMA	DMA channel
1	1	RxA
1	0	TxA
0	1	RxB
0	0	TxB

A1/A/B DMA Channel/Channel A/Channel B (bidirectional). This signal, when used as input, selects the SCC channel in which the read and write operation occurs. Note that A0/SCC/DMA pin must be held high to select this feature. When this pin is used as an output, it is used in conjunction with the A0/SCC/DMA pin output to identify which DMA channel is active. During a DMA peripheral access, the A1/A/B pin is ignored.

/RESET (input, active Low). This signal resets the device to a known state. The first write to the ISCC after a reset accesses the BCR to select additional bus options for the device.

FUNCTIONAL DESCRIPTION

The functional capabilities of the ISCC are described in three blocks: the SCC cell, the DMA cell, and the Bus Interface Unit (BIU). Each of the blocks are described independently in the following sections with the ISCC

architecture shown in Figure 3. Please refer to the ISCC Technical Manual for a detailed description of the functions outlined here.

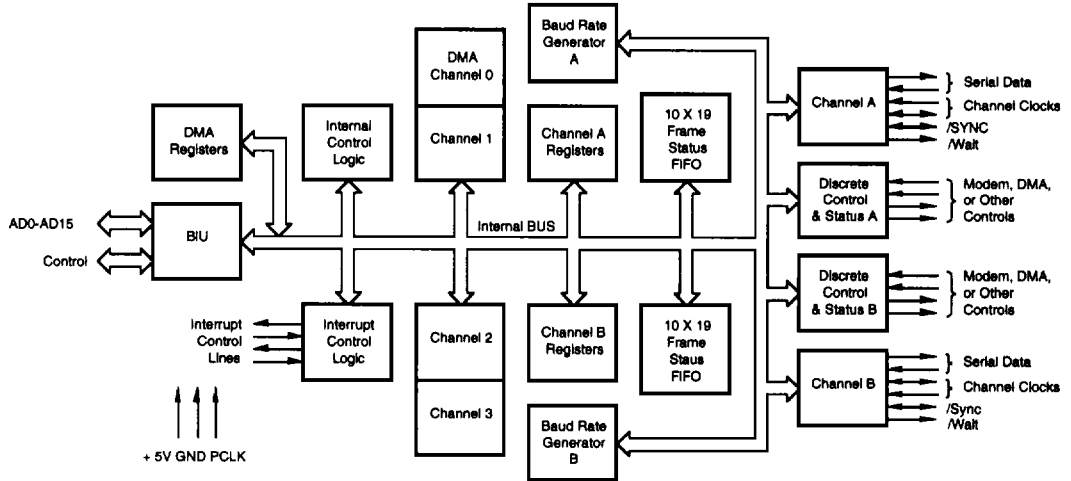


Figure 3. Block Diagram of ISCC Architecture

SCC Cell Data Communications Capabilities. The ISCC provides two independent full-duplex programmable channels for use in any common asynchronous or synchronous data communications protocol. The ISCC is built from Zilog's industry standard SCC core and is compatible with designs using Zilog's SCC to receive and transmit data (Figure 4).

Asynchronous Modes. Send and Receive can be accomplished independently on each channel with five to eight bits per character, plus optional even or odd parity. The transmitters can supply one, one-and-a-half, or two stop bits per character and can provide a break output at any time. The receiver break-detection logic interrupts the CPU both at the start and at the end of a received break. Reception is protected from spikes by a transient spike-rejection mechanism that checks the signal one-half a bit time after a Low level is detected on the receive data input (RxDA or RxDB in Figure 2). If the Low does not persist (e.g., a transient), the character assembly process does not start.

Framing errors and overrun errors are detected and buffered together with the partial character on which they

occur. Vectored interrupts allow fast servicing or error conditions using dedicated routines. Furthermore, a built-in checking process avoids the interpretation of a framing error as a new start bit: a framing error results in the addition of one-half a bit time to the point at which the search for the next start bit begins.

The ISCC does not require symmetric transmit and receive clock signals - a feature allowing use of the wide variety of clock sources. The transmitter and receiver can handle data at a rate supplied to the receive and transmit clock inputs. In Asynchronous modes, the SYNC pin may be programmed as an input used for functions such as monitoring a ring indicator.

Synchronous Modes. The ISCC supports both byte-oriented and bit-oriented synchronous communication. Synchronous byte-oriented protocols can be handled in several modes, allowing character synchronization with a 6-bit or 8-bit synchronous character (Monosync), and 12-bit synchronization pattern (Bisync), or with an external synchronous signal. Leading sync characters can be removed without interrupting the CPU.

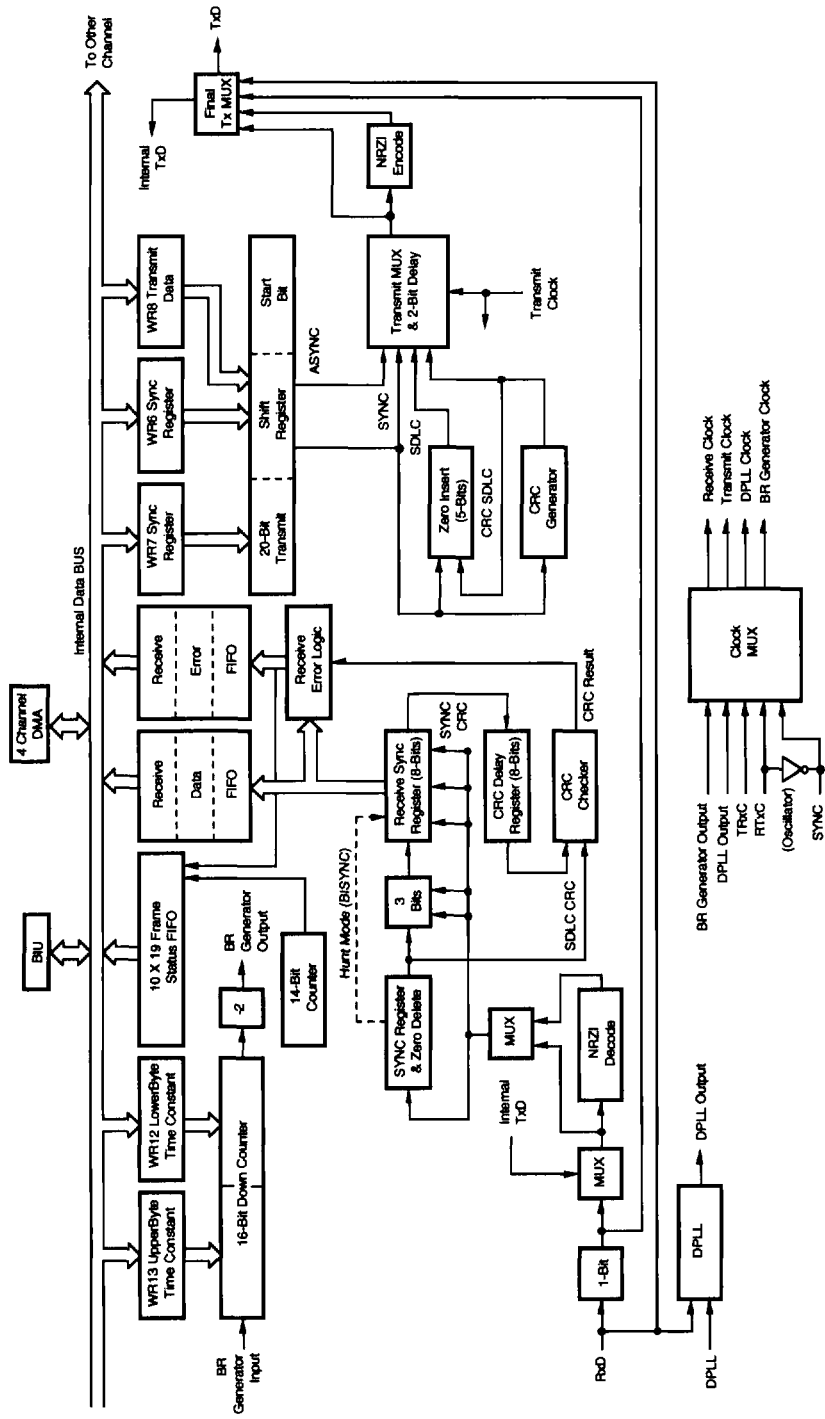


Figure 4. ISCC Data Path

FUNCTIONAL DESCRIPTION (Continued)

Five or 7-bit synchronous characters are detected with 8- or 16-bit patterns in the ISCC by overlapping the larger

pattern across multiple incoming synchronous characters as shown in Figure 5.

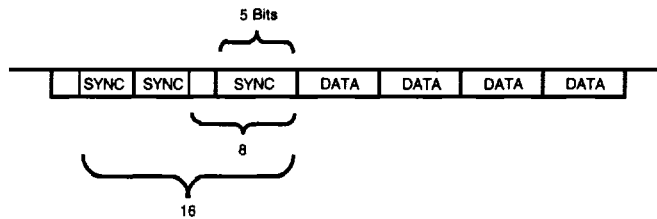


Figure 5. Detecting 5- or 7-Bit Synchronous Characters

CRC checking for Synchronous byte oriented modes is delayed by one character time so that the CPU may disable CRC checking on specific characters. This permits the implementation of protocols such as IBM Bisync.

Both CRC-16 $8 \times 86 + X^{15} + X^2 + 1$ and CCITT $8 \times 86 + X^{12} + X^5 + 1$ error checking polynomials are supported. Either polynomial may be selected in all Synchronous modes. Users may preset the CRC generator and checker to all 1's or all 0's. The ISCC also provides a feature that automatically transmits CRC data when no other data is available for transmission. This allows for high speed transmissions under DMA control, with no need for CPU intervention at the end of a message. When there is no data or CRC to send in Synchronous modes, the transmitter inserts 6-, 8-, or 16-bit synchronous characters, regardless of the programmed character length.

The ISCC supports Synchronous bit-oriented protocols, such as SDLC and HDLC, by performing automatic flag sending, zero insertion, and CRC generation. A special command is used to abort a frame in transmission. At the end of a message, the ISCC automatically transmits the CRC and trailing flag when the transmitter underruns. The transmitter may also be programmed to send an idle line consisting of continuous flag characters or a steady marking condition.

If a transmit underrun occurs in the middle of a message, an external/status interrupt warns the CPU of this status change so that an abort may be issued. The ISCC may also be programmed to send an abort itself in case of an underrun, relieving the CPU of this task. One to eight bits per character can be sent, allowing reception of a message with no prior information about the character structure in the information field of a frame.

The receiver automatically acquires synchronization on the leading flag of a frame in SDLC or HDLC and provides a synchronization signal on the SYNC pin (an interrupt can also be programmed). The receiver can be programmed to search for frames addressed by a single byte (or four bits within a byte) of a user-selected address or to a global broadcast address. In this mode, frames not matching either the user-selected or broadcast address are ignored. The number of address bytes can be extended under software control. For receiving data, an interrupt on the first received character, or an interrupt on every character, or on special condition only (end-of-frame) can be selected. The receiver automatically deletes all 0's inserted by the transmitter during character assembly. CRC is also calculated and is automatically checked to validate frame transmission. At the end of transmission, the status of a received frame is available in the status registers. In SDLC mode, the ISCC must be programmed to use the SDLC CRC polynomial, but the generator and checker may be preset to all 1's or all 0's. The CRC is inverted before transmission and the receiver checks against the bit pattern 0001110100001111.

NRZ, NRZI or FM coding may be used in any 1x mode. The parity options available in Asynchronous modes are available in Synchronous modes.

SDLC Loop Mode. The ISCC supports SDLC Loop mode in addition to normal SDLC. In an SDLC Loop, there is a primary controller station that manages the message traffic flow on the loop and any number of secondary stations. In SDLC Loop mode, the ISCC performs the functions of a secondary station while an ISCC operating in regular SDLC mode acts as a controller (Figure 6).

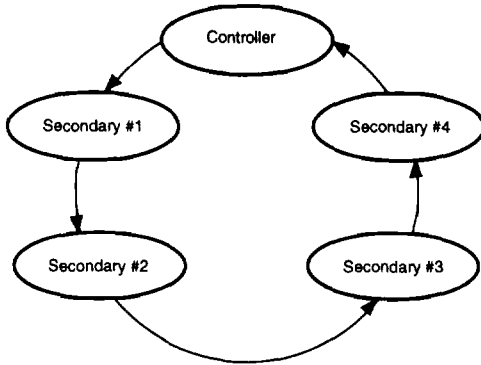


Figure 6. An SDLC Loop

A secondary station in an SDLC Loop is always listening to the messages being sent around the loop and, in fact, passes these messages to the rest of the loop by retransmitting them with a one-bit-time delay. The secondary station places its own message on the loop only at specific times. The controller signals that secondary stations can transmit messages by sending a special character, called an EOP (End Of Poll), around the loop. The EOP character is the bit pattern 11111110. Because of zero insertion during messages, this bit pattern is unique and easily recognized.

When a secondary station has a message to transmit and recognizes an EOP on the line, it changes the last binary 1 of the EOP to a 0 before transmission. This has the effect of turning the EOP into a flag sequence. The secondary station now places its message on the loop and terminates the message with an EOP. Any secondary stations further down the loop with messages to transmit append their messages to the message of the first secondary station by the same process. Any secondary stations without messages to send merely echo the incoming message and are prohibited from placing messages on the loop (except upon recognizing an EOP.)

SDLC Loop mode is a programmable option in the ISCC. NRZ, NRZI, and FM coding may all be used in SDLC Loop mode.

SDLC FIFO. The ISCC's ability to receive high speed back-to-back SDLC frames is maximized by a 10-bit deep by 19-bit wide status FIFO. When enabled (through WR15, bit D2), it provides the DMA the ability to continue to transfer data into memory so that the CPU can examine the message later. For each SDLC frame, a 14-bit byte count

and 5 status/error bits are stored. The byte count and status bits are accessed through Read Registers 6 and 7. Read Registers are only accessible when the SDLC FIFO is enabled. The 10 x 19 status FIFO is separate from the 3 byte receive data FIFO.

Notes on the SDLC FIFO. When using the SDLC FIFO enhancement in channel B, it is necessary to enable the enhancement in channel A. There is no special requirement to enable the enhancement in channel A only, or to use it in both channels. Designs using only one channel should, therefore, use channel A.

When an SDLC frame is received with an abort condition, the byte counter in the FIFO enhancement is not reset. Therefore, after the abort is received, a dummy frame consisting of a flag should be sent by the transmitter. This resets the byte counter for the next frame. The aborted frame has a byte count which includes the byte count of the next dummy frame.

Baud Rate Generator. Each channel in the ISCC contains a programmable baud rate generator. Each generator consists of two 8-bit time constant registers that form a 16-bit time constant, a 16-bit down counter, and a flip-flop on the output producing a square wave. On start-up, the flip-flop on the output is set in a High state, the value in the time constant register is loaded into the counter, and the counter starts counting down. The output of the baud rate generator toggles upon reaching 0, the value in the time constant register is loaded into the counter, and the process is repeated. The time constant may be changed at any time, but the new value does not take effect until the next load of the counter.

The output of the baud rate generator may be used as either the transmit clock, the receive clock, or both. It can also drive the Digital Phase-Locked Loop (see next section).

If the receive clock or transmit clock is not programmed to come from the TRxC pin, the output of the baud rate generator may be echoed out via the TRxC pin.

The following formula relates the time constant to the baud rate where PCLK or RTxC is the baud rate generator input frequency in Hertz. The clock mode is 1, 16, 32, or 64, as selected in Write Register 4, bits D6 and D7. Synchronous operation modes should select 1 and Asynchronous should select 16, 32 or 64.

$$\text{Time Constant} = \frac{\text{PCLK or RTxC Frequency}}{2(\text{Baud Rate})(\text{Clock Mode})} - 2$$

FUNCTIONAL DESCRIPTION (Continued)

Digital Phase-Locked Loop. The ISCC contains a Digital Phase-Locked Loop (DPLL) to recover clock information from a data stream with NRZI or FM encoding. The DPLL is driven by a clock that is nominally 32 (NRZI) or 16 (FM) times the data rate. The DPLL uses this clock, along with the data stream, to construct a clock for the data. This clock is then used as the ISCC receive clock, the transmit clock, or both.

For NRZI encoding, the DPLL counts the 32x clock to create nominal bit times. As the 32x clock is counted, the DPLL is searching the incoming data stream for edges (either 1 to 0, or 0 to 1). Whenever an edge is detected, the DPLL makes a count adjustment (during the next counting cycle), producing a terminal count closer to the center of the bit cell.

For FM encoding, the DPLL still counts from 0 to 31, but with a cycle corresponding to two bit times. When the DPLL is locked, the clock edges in the data stream should occur between counts 15 and 16 and between counts 31 and 0. The DPLL looks for edges only during a time centered on the 15 to 16 counting transition.

The 32x clock for the DPLL can be programmed to come from either the RTxC input or the output of the baud rate

generator. The DPLL output may be programmed to be echoed out of the ISCC via the TRxC pin (if this pin is not being used as an input).

Data Encoding. The ISCC may be programmed to encode and decode the serial data in four different ways (Figure 7). In NRZ encoding, a 1 is represented by a High level and a 0 is represented by a Low level. In NRZI encoding, a 1 is represented by no change in level and a 0 is represented by a change in level. In FM1 (more properly, bi-phase mark), a transition occurs at the beginning of every bit cell. A 1 is represented by an additional transition at the center of the bit cell and a 0 is represented by no additional transition at the center of the bit cell. In FM0 (bi-phase space), a transition occurs at the beginning of every bit cell. A 0 is represented by an additional transition at the center of the bit cell, and a 1 is represented by no additional transition at the center of the bit cell. In addition to these four methods, the ISCC can be used to decode Manchester (bi-phase level) data by using the DPLL in the FM mode and programming the receiver for NRZ data. Manchester encoding always produces a transition at the center of the bit cell. If the transition is 0 to 1, the bit is a 0. If the transition is 1 to 0, the bit is a 1.

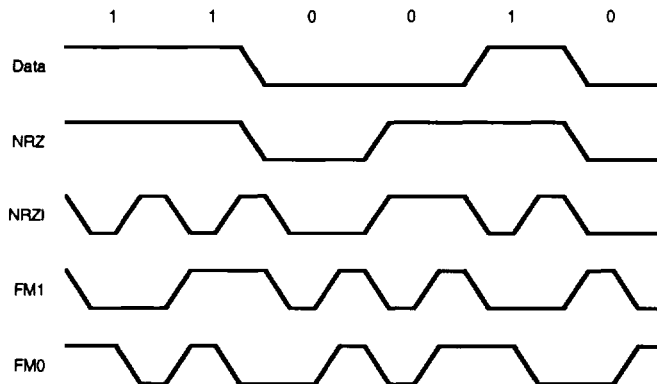


Figure 7. Data Encoding Methods

Auto Echo and Local Loopback. The ISCC is capable of automatically echoing everything it receives. This feature is useful mainly in Asynchronous modes, but works in Synchronous and SDLC modes as well. In Auto Echo mode, TxD is RxD. Auto Echo mode can be used with NRZI or FM encoding with no additional delay because the data stream is not decoded before retransmission. In Auto Echo

mode, the /CTS input is ignored as a transmitter enable (although transitions on this input can still cause interrupts if programmed to do so). In this mode, the transmitter is actually bypassed and the programmer is responsible for disabling transmitter interrupts and /WAIT//REQUEST on transmit.

The ISCC is also capable of local loopback. In this mode TxD is RxD is just like Auto Echo mode. However, in Local Loopback mode the internal transmit data is tied to the internal receive data and RxD is ignored (except to be echoed out via TxD). The /CTS and /DCD inputs are also ignored as transmit and receive enables. However, transitions on these inputs can still cause interrupts. Local Loopback works in Asynchronous, Synchronous and SDLC modes with NRZ, NRZI or FM coding of the data stream.

DMA Core. The ISCC contains four independent fly-by mode DMA channels. Each of the ISCC's transmit and

receive channels has a DMA channel dedicated to it to move data to-and-from memory. The DMA channels are dedicated to the transmit and receive FIFO's, and therefore, can not be used for device initialization. Each DMA has a 32-bit address and a 16-bit byte counter. The DMA address may be incremented or decremented providing flexibility in doing block transfers.

See the I/O Interface Capabilities Section for more details on the DMA features.

BUS INTERFACE UNIT (BIU) DESCRIPTION

The ISCC contains a flexible bus interface that is compatible with a variety of microprocessors and microcontrollers. The device is designed to work with 8- or 16-bit bus systems and may be used with address/data multiplexed busses or non-multiplexed busses. The multiplexed bus is selected for the ISCC if there is an Address Strobe prior to or during the transaction which writes the BCR. If no Address Strobe is present prior to or during the transaction which writes the BCR, a non-multiplexed bus is selected.

When the ISCC is initialized for non-multiplexed operation, register addressing for the ISCC cell is (with the exception of WR0 and RR0), accomplished as follows. Programming the write registers requires two write operations and reading the read registers requires both a write and a read operation. The first write is to WR0 which contains four bits that point to the selected register (note point high command). The second write is the actual control word for the selected register. If the second operation is a read, the selected register is accessed. When in the non-multiplexed mode, all of the registers in the SCC cell of the ISCC, including the data registers, are accessed in this fashion. The pointer register is automatically cleared after the second read or write operation so that WR0 (or RR0) is addressed again. Note that when the DMA is not used to address the data, the data registers must be accessed by pointing to Register 8. This is in contrast to the Z8530 which allows direct addressing of the data registers through the C/D pin.

When the ISCC is initialized for non-multiplexed operation, register addressing for the DMA cell (with the exception of CSAR) is accomplished as follows and is completely independent of the SCC cell register addressing. Programming the write registers requires two write operations and reading the read registers requires both a write and a read operation. The first write is to the Command Status

Address Register (CSAR) which contains five bits that point to the selected register (CSAR bits 4 - 0). The second write is the actual control word for the selected register. If the second operation is a read, the selected register is accessed. When in the non-multiplexed mode, all of the registers in the DMA cell of the ISCC may be accessed in this fashion. The pointer bits are automatically cleared after the second read or write operation so that CSAR is addressed again.

When the ISCC is initialized for multiplexed bus operation, all registers in the SCC cell are directly addressable with the register address occupying AD5 through AD1, or AD4 through AD0 (Shift Left / Shift Right modes). Two additional pins, A0/SCC//DMA and A1/A//B control the channel A/B register selection and the SCC channel /DMA selection. Refer to the A0/SCC//DMA and A1/A//B pin descriptions for the encoding of these signals.

The Shift Left/Shift Right modes for the address decoding for the internal registers (multiplexed bus) are separately programmable for the SCC cell and for the DMA cell. For the SCC cell the programming and operation is identical to that in the SCC; programming is accomplished through Write Register 0 (WR0), bits 1 and 0 (Figure 9).

The programming of the Shift Left/Shift Right modes for the DMA cell is accomplished in the BCR, bit 0. In this case, the shift function is similar to that for the SCC cell; with Shift left, the internal register addresses are decoded from bits AD5 through AD1 and with Shift Right, the internal register addresses are decoded from bits AD4 through AD0.

When the multiplexed bus mode is selected, Write Register 0 (WR0) takes on the form of WR0 in the Z8030 (Figure 9).

FUNCTIONAL DESCRIPTION (Continued)

All data transfers to and from the ISCC are done in bytes even though the data can, at special times, occupy the lower or upper byte of the 16-bit bus. When accessed as a peripheral device (i.e., when the ISCC is not a bus master performing DMA transfers), all bus transactions are on the lower 8 bits of the bus with the following exception:

When the ISCC registers are read, the byte data is present on both the lower 8 bits of the bus and the upper 8 bits of the bus. Data is accepted only on the lower 8 bits of the bus except in certain DMA transfers.

During DMA transfers, data may be transferred to or from the ISCC on the upper 8 bits of the bus for odd or even byte transfers. During DMA transfers to memory from the ISCC, byte data only is transferred and the data appears on both the lower 8 bits and is replicated on the upper 8 bits of the bus.

During DMA transfers to the ISCC from memory, byte data only is transferred and normally data is accepted only on the lower 8 bits of the bus. However, the byte swapping feature may be used to elect on which byte of the bus the data is accepted. The byte swapping feature is enabled by programming the Byte Swap Enable bit to a 1 in the BCR. The odd/even byte transfer selection is made by programming the Byte Swap Select bit in the BCR. If Byte Swap Select is a 1, then even address bytes (transfers where the DMA address has A0 equal 0) are transferred on the lower 8 bits of the bus and odd address bytes (transfers where the DMA address has A0 equal 1) are transferred on the upper 8 bits of the bus. If Byte Swap Select is a 0, then even address bytes (transfers where the DMA address has A0 equal 0) are transferred on the upper 8 bits of the bus and odd address bytes (transfers where the DMA address has A0 equal 1) are transferred on the lower 8 bits of the bus.

I/O INTERFACE CAPABILITIES

The ISCC offers the choice of Polling, Interrupt (vectored or non-vectored), and DMA Transfer modes to transfer data, status, and control information to and from the CPU.

Polling. In this mode all interrupts and the DMA's are disabled. Three status registers in the SCC are automatically updated whenever any function is performed. For example, end-of-frame in SDLC mode sets a bit in one of these status registers. With polling, the CPU must periodically read a status register until the register contents indicate the need for some CPU action to be taken. Only one register in the SCC needs to be read; depending on the contents of the register, the CPU either reads data, writes data, or satisfies an error condition. Two bits in the register indicate the need for data transfer. An alternative is to poll the Interrupt Pending register to determine the source of an interrupt. The status for both SCC channels resides in one register.

Interrupts. When the ISCC responds to an Interrupt Acknowledge signal (INTACK) from the CPU, an interrupt vector is placed on the data bus. Both the SCC and the DMA contain vector registers. Depending on the source of interrupt, one of these vectors is returned. Either unmodified or modified by the interrupt status to indicate the exact cause of the interrupt.

Each of the six sources in interrupts in the SCC (Transmit, Receive, and External/Status interrupts in both channels) and each DMA channel has three bits associated with the interrupt source: Interrupt Pending (IP), Interrupt Under Service (IUS), and Interrupt Enable (IE). If the IE bit is set

for any given source of interrupt, then that source can request interrupts. The only exception to this rule is when the associate Master Interrupt Enable (MIE) bit is reset, then no interrupts are requested. Both the SCC and the DMA have an associated MIE bit. The IE bits in the SCC are write only, but the IE bits in the DMA are read write.

The ISCC provides for nesting of interrupt sources with an interrupt daisy chain using the IEI, IEO, and INTACK pins. As a microprocessor peripheral, the ISCC may request an interrupt only when no higher priority device is requesting one, e.g., when IEI is High. If the device in question requests an interrupt, it enables the /INT signal. The CPU then responds with /INTACK, and the interrupting device places the vector on the data bus.

In the ISCC, the IP bit signals a need for interrupt servicing. When an IP bit is 1 and the IEI input is High, the /INT signal is activated, requesting an interrupt. In the SCC, if the IE bit is not set, then the IP for that source can never be set. The IP bits in the DMA are set independent of the IE bit.

The IUS bits signal that an interrupt request is being serviced. If an IUS is set, all interrupt sources of lower priority in the ISCC and external to the ISCC are prevented from requesting interrupts. The internal interrupt sources are inhibited by the state of the internal daisy chain, while lower priority devices are inhibited by the IEO output of the ISCC being pulled Low and propagated to subsequent peripherals. Internally, the SCC is higher priority than the DMA. An IUS bit is set during an Interrupt Acknowledge cycle if there are no higher priority devices requesting interrupts.

Within the SCC portion of the ISCC there are three types of interrupts: Transmit, Receive, and External/Status. Each interrupt type is enabled under program control with Channel A having higher priority than Channel B, and with Receive, Transmit, and External/Status interrupts prioritized in that order within each channel. When the Transmit interrupt is enabled, the CPU is interrupted when the transmit buffer becomes empty. This implies that the transmitter had a data character written into it to make it empty. When enabled, the receiver interrupts the CPU in one of three ways:

1. Interrupt on First Receive Character or Special Receive Condition
2. Interrupt on All Receive Characters or Special Receive Condition
3. Interrupt on Special Condition Only

Interrupt on First Character or Special Condition, and Interrupt on Special Condition Only, are typically used when doing block transfers with the DMA. A Special Receive Condition is one of the following: receiver overrun, framing error in Asynchronous mode, end-of-frame in SDLC mode and, optionally, a parity error. The Special Receive Condition interrupt is different from an Ordinary Receive Character Available interrupt only by the status placed in the vector during the Interrupt Acknowledge cycle. In Interrupt on First Receive Character, an interrupt occurs from Special Receive Conditions any time after the First Receive Character interrupt.

The main function of the External/Status interrupt is to monitor the signal transitions of the /CTS, /DCD, and /SYNC pins; however, an External/Status interrupt is also caused by a Transmit Underrun condition, or a zero count in the baud rate generator, or by the detection of a Break (Asynchronous mode), Abort (SDLC mode) or EOP (SDLC Loop mode) sequence in the data stream. The interrupt caused by the Abort or EOP has a special feature allowing the ISCC to interrupt when the Abort or EOP sequence is detected or terminated. This feature facilitates the proper termination of the current message, correct initialization of the next message, and the accurate timing of the Abort condition in external logic.

Each DMA in the ISCC has two sources of interrupt, which share an IP bit and an IUS bit, but have independent enables: Terminal Count and Abort. The Abort interrupt is

generated when an active DMA channel is forced to terminate its transfers because /BUSACK is de-asserted during a transfer. The Terminal Count interrupt is generated when the DMA transfer count reaches zero. The DMA channels themselves are prioritized in a fixed order: Receive A, Transmit A, Receive B, and Transmit B.

DMA Transfer. In this mode, the on-chip DMA channels transfer data directly to the transmit buffers or directly from the receive buffers. No other transfers are possible (for initialization, for example). The request signals from the receivers and transmitters are hard-wired to the request inputs of the DMA channels internally. Each DMA channel provides a 32-bit address which is either incremented or decremented with a 16-bit transfer length. Whenever a DMA channel receives a request from its associated receiver or transmitter and the DMA channel is enabled, the ISCC activates the /BUSREQ signal. Upon receipt of an active /BUSACK, the DMA channel transfers data between memory and the SCC. This transfer continues until the receiver or transmitter stops requesting a transfer, until the terminal count is reached, or /BUSACK is deactivated. The four DMA channels operate independently when the Request Per Channel option is selected; otherwise, all requests pending at the time of bus acquisition will be serviced before the bus is released. Each DMA channel is independently enabled and disabled.

Bus Interface. The ISCC contains a flexible bus interface that provides the resources necessary to interface the ISCC to virtually any type of bus. The ISCC directly supports either an 8-bit or a 16-bit bus, although all transfers to and from the device are limited to 8-bits at a time. The control signals provided allow connection to either a multiplexed address/data type bus or to a separate address and data type bus. While the ISCC is bus master, the upper address, lower address, and data are multiplexed on AD15-0. Interrupt Acknowledge is signaled through the /INTACK signal, which may be programmed as either a status input, a pulsed input, or a double-pulsed input. The ISCC also contains a /WAIT//RDY input for synchronizing CPU or DMA and memory accesses. This pin may be programmed to act as either a /WAIT signal or a /READY signal. The appropriate signal is provided by the ISCC when it is not bus master, and is sampled by the ISCC when it is bus master. The ISCC requests the bus via a /BUSREQ signal and assumes bus mastership upon receipt of a /BUSACK signal.

CONTROL REGISTERS

The ISCC contains separate register sets for the SCC core and the DMA core. Access to each set is controlled by the A0/SCC//DMA pin. When this pin is an input, a High selects the SCC core and a Low selects the DMA core. The first write to the ISCC after reset is always to the Bus Configuration Register (BCR), see Figure 8. If an /AS is present before the BCR is written to, a multiplexed bus is selected. If no /AS is present before the BCR write, a non-multiplexed bus is selected. The BCR cannot be changed without resetting the ISCC.

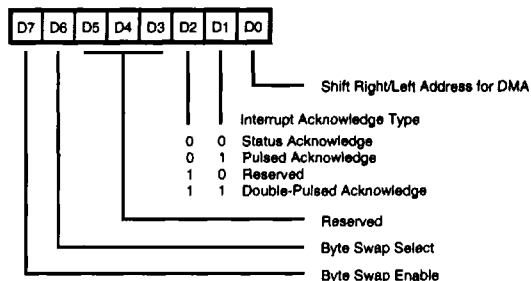


Figure 8. Bus Configuration Register (BCR)


SCC Cell. The SCC core contains 13 write registers (14 counting the transmit buffer) and ten read registers (11 counting the receive buffer) in each channel. Two of the write registers are shared (WR2 and WR9) and are accessed by both channels. WR2 contains the interrupt vector for both channels, while WR9 contains the interrupt control bits. Table 1 is a list of the SCC write registers and Table 2 is a list of the SCC read registers. Figures 9 and 10 show the write and read register formats. Read Registers 6 and 7 are only accessible when the SDLC FIFO is enabled. When the SDLC FIFO is not enabled, Read Registers 6 and 7 are images of Read Registers 2 and 3, respectively.

DMA Cell. The DMA cell contains 17 registers (counting the BCR). All of the registers are write/read except the BCR, CCAR and ICSR. The ISCC also has two status registers, the DMA status register (DSR) and the Interrupt Status Register (ISR), which are addressed by reading the CCAR and ICSR. The DMA also reserves two addresses for future use and should not be addressed or should be written with all zeros to prevent unexpected operation and maintain compatibility with future products. Each DMA channel has a 32-bit wide address register providing an addressing range of 4 gigabytes. Each channel also has a 16-bit count register for up to 64K byte data packet sizes (Reference Figures 11-26 and Table 3).


Table 1. SCC Write Registers

Bit	Description
WR0	Register Pointers, various initialization commands
WR1	Transmit and Receive interrupt enables, WAIT/DMA commands
WR2	Interrupt Vector
WR3	Receive parameters and control modes
WR4	Transmit and Receive modes and parameters
WR5	Transmit parameters and control modes
WR6	Sync Character or SDLC address
WR7	Sync Character or SDLC flag
WR8	Transmit buffer
WR9	Master Interrupt control and reset commands
WR10	Miscellaneous transmit and receive control bits
WR11	Clock mode controls for receive and transmit
WR12	Lower byte of baud rate generator
WR13	Upper byte of baud rate generator
WR14	Miscellaneous control bits
WR15	External status interrupt enable control

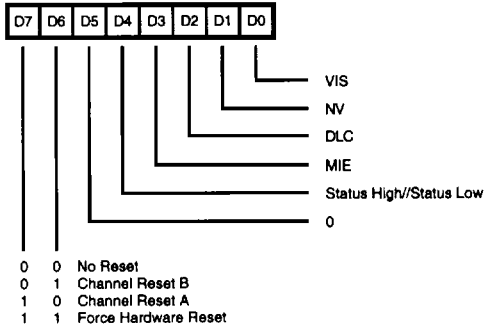
Write Register 9




Write Register 12

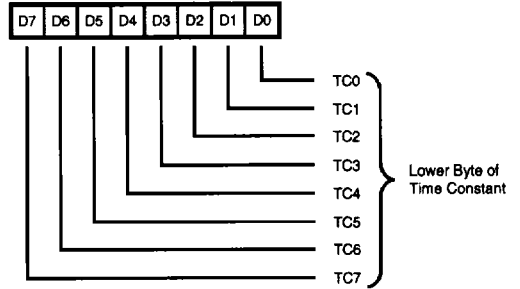


Write Register 10

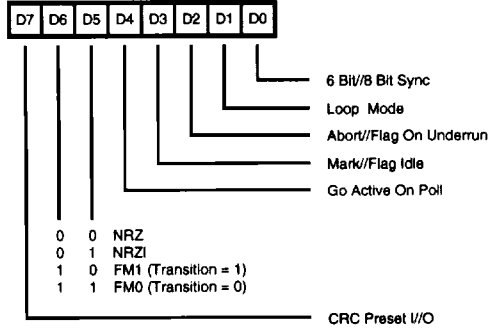

Write Register 13

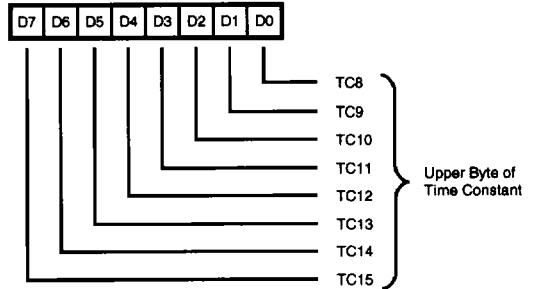

Write Register 11

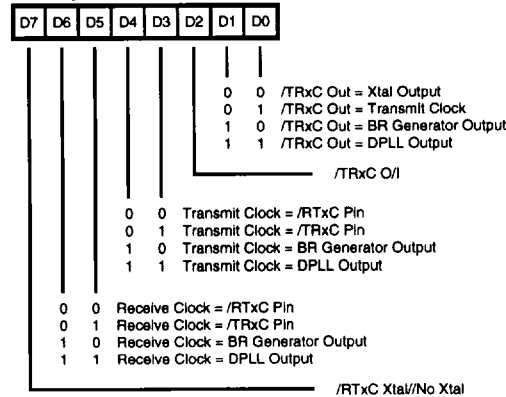

Write Register 14

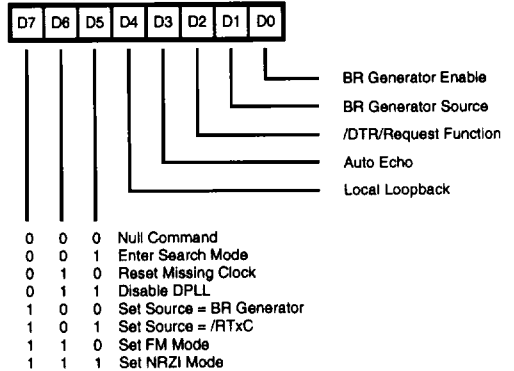


Figure 9. Write Register Bit Functions (Continued)

CONTROL REGISTERS (Continued)


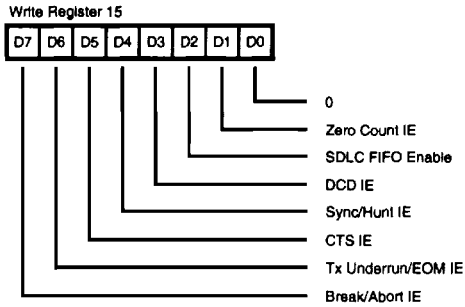


Figure 9. Write Register Bit Functions (Continued)


Table 2. SCC Read Registers

Bit	Description
RR0	Transmit and Receive buffer status and external status
RR1	Special Receive Condition status
RR2	Modified interrupt vector (Channel B only), Unmodified interrupt vector (Channel A only)
RR3	Interrupt pending bits (Channel A only)
RR6	SDLC FIFO byte counter lower byte (only when enabled)
RR7	SDLC FIFO byte count and status (only when enabled)
RR8	Receive buffer
RR10	Miscellaneous status bits
RR12	Lower byte of baud rate generator time constant
RR13	Upper byte of baud rate generator time constant
RR15	External Status interrupt information

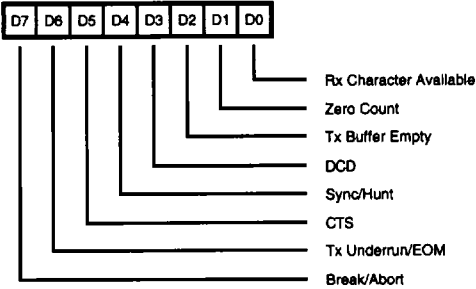
Read Register 0




Read Register 3

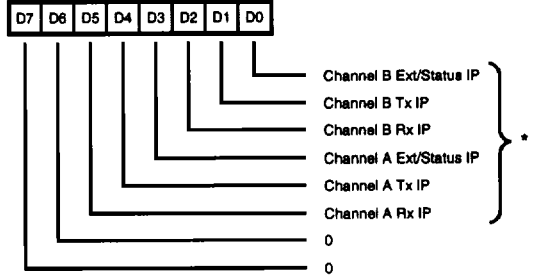

Read Register 1

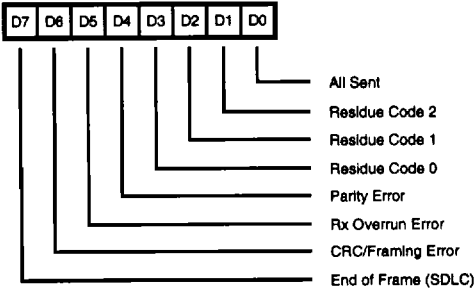


Read Register 6 *

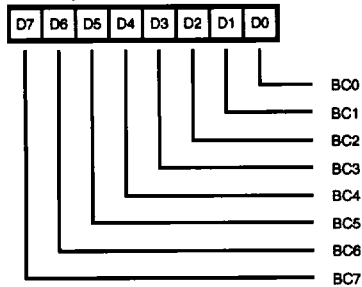

* Can only be accessed if the SDLC FIFO enhancement is enabled (WR15 bit D2 set to 1)

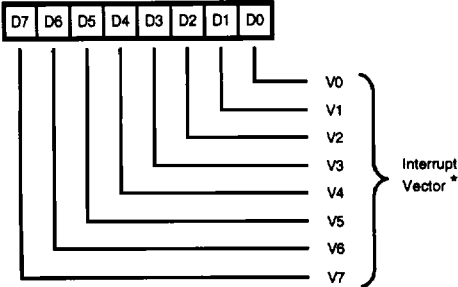
Read Register 2



* Modified In B Channel

SDLC FIFO Status and Byte Count (LSB)

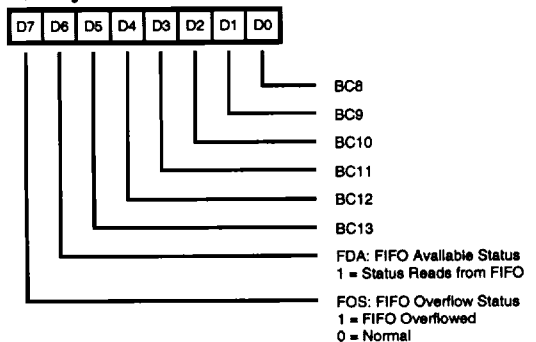Read Register 7 *



* Can only be accessed if the SDLC FIFO enhancement is enabled (WR15 bit D2 set to 1)

SDLC FIFO Status and Byte Count (MSB)

Figure 10. Read Register Bit Functions

CONTROL REGISTERS (Continued)

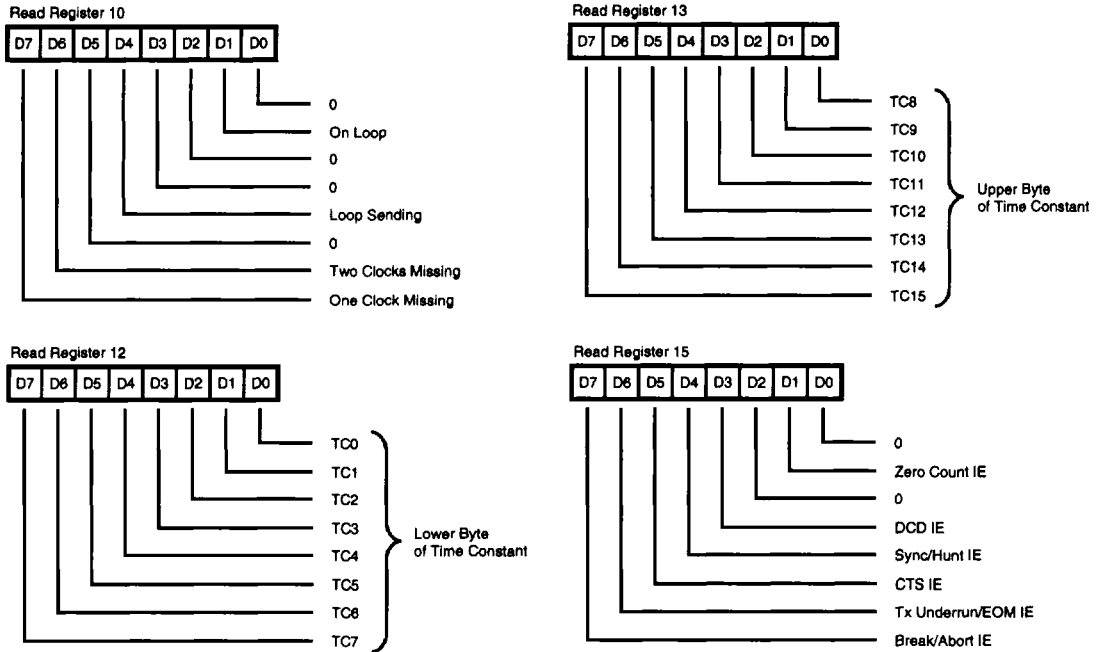


Figure 10. Read Register Bit Functions (Continued)

Table 3. DMA Cell Register Description

Address	Name	Description
xxxxx	BCR	Bus Configuration Register
00000	CCAR	Channel Command/Address Register (WRITE)
00000	DSR	DMA Status Register (READ)
00001	ICR	Interrupt Control Register
00010	IVR	Interrupt Vector Register
00011	ICSR	Interrupt Command Register (WRITE)
00011	ISR	Interrupt Status Register (READ)
00100	DER	DMA Enable/Disable Register
00101	DCR	DMA Control Register
00110		Reserved Address
00111		Reserved Address
01000-01001	RDCRA	Receive DMA Count Register Channel A (Low-high byte)
01010-01011	TDCRA	Transmit DMA Count Register Channel A
01100-01101	RDCRB	Receive DMA Count Register Channel B
01110-01111	TDCRB	Transmit DMA Count Register Channel B
10000-10011	RDARA	Receive DMA Address Register Channel A
10100-10111	TDARA	Transmit DMA Address Register Channel A
11000-11011	RDARB	Receive DMA Address Register Channel B
11100-11111	TDARB	Transmit DMA Address Register Channel B

7

CONTROL REGISTERS (Continued)

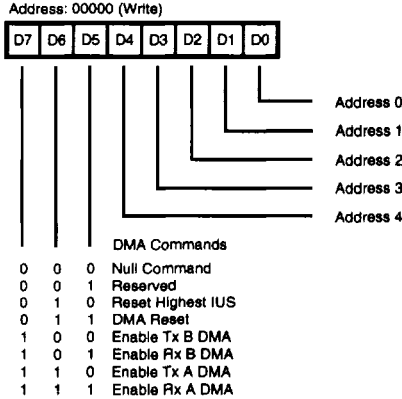


Figure 11. Channel Command/Address Register

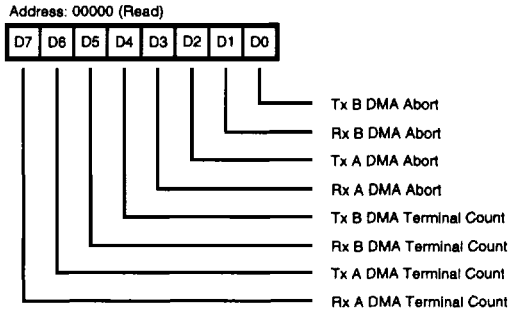


Figure 12. DMA Status Register

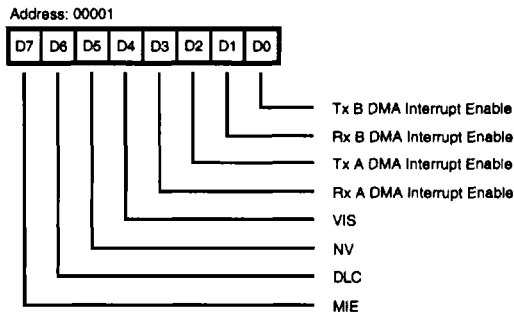


Figure 13. Interrupt Control Register

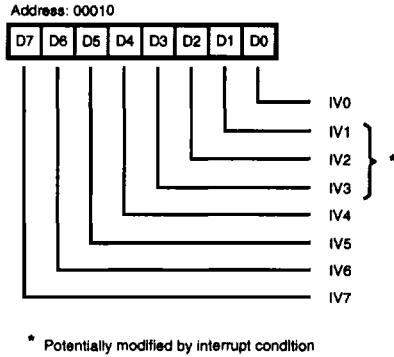


Figure 14. Interrupt Vector Register

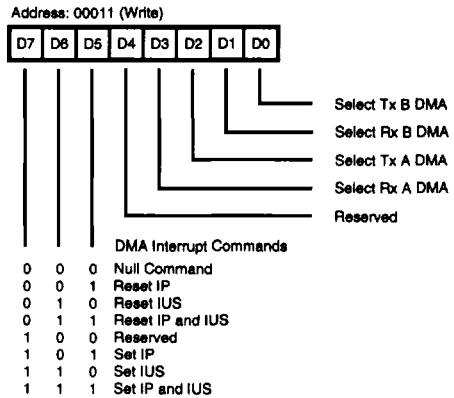


Figure 15. Interrupt Command/Register

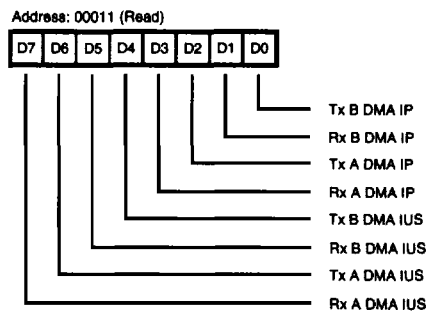


Figure 16. Interrupt Status Register

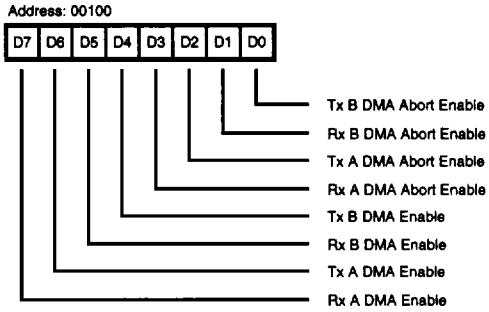


Figure 17. DMA Enable Register



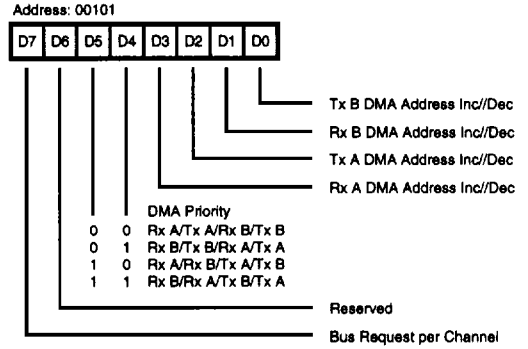


Figure 18. DMA Control Register

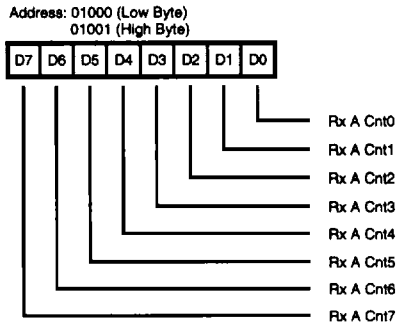


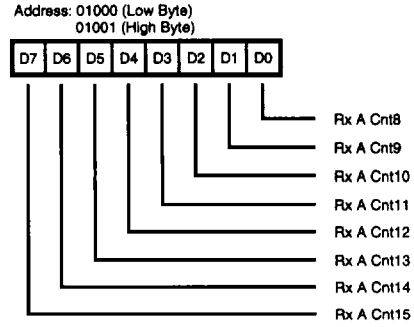A) LSB




B) MSB

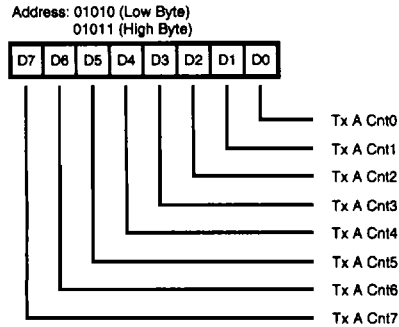Figure 19. Receive DMA Count Register Channel A



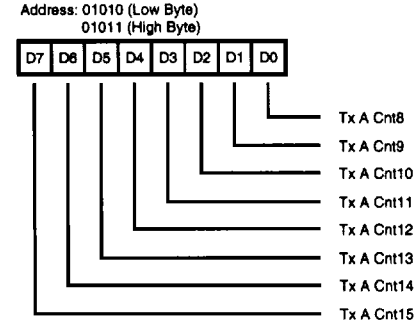A) LSB




B) MSB

Figure 20. Transmit DMA Count Register Channel A


CONTROL REGISTERS (Continued)

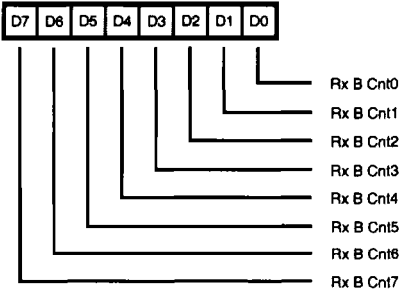Address: 01100 (Low Byte)
01101 (High Byte)



A) LSB

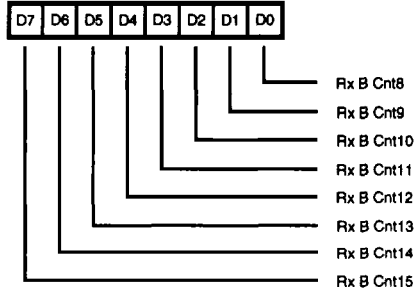
Address: 01100 (Low Byte)
01101 (High Byte)



B) MSB


Figure 21. Receive DMA Count Register Channel B

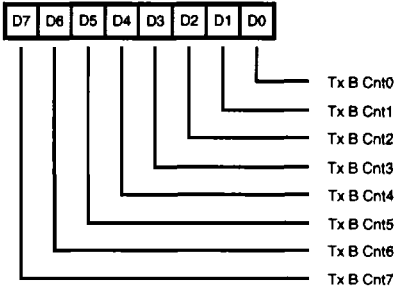Address: 01110 (Low Byte)
01111 (High Byte)



A) LSB

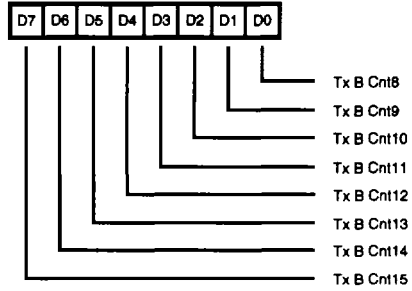Address: 01110 (Low Byte)
01111 (High Byte)



B) MSB

Figure 22. Transmit DMA Count Register Channel B


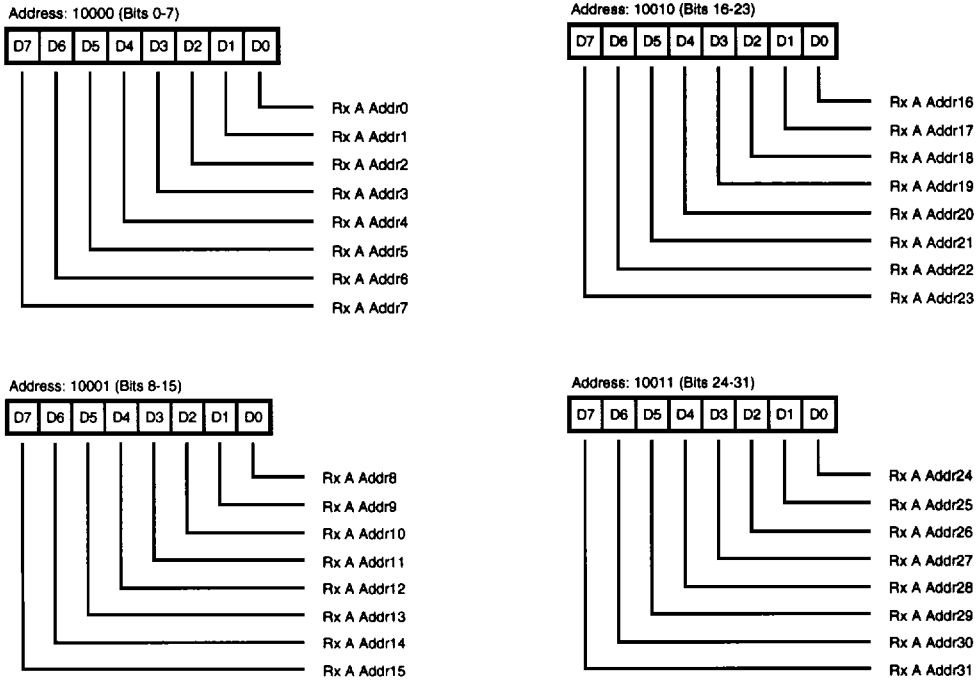



Figure 23. Receive DMA Address Register Channel A

CONTROL REGISTERS (Continued)

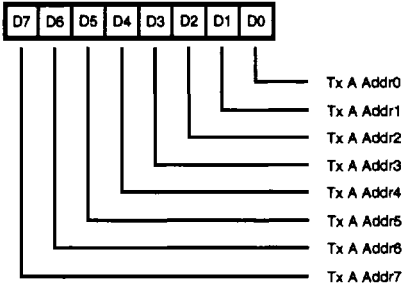
Address: 10100 (Bits 0-7)



Address: 10110 (Bits 16-23)

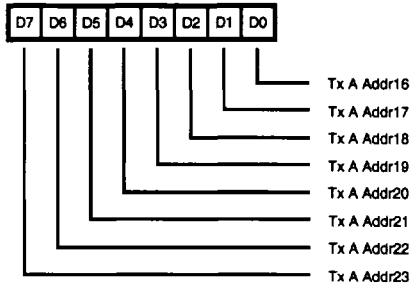

Address: 10101 (Bits 8-15)

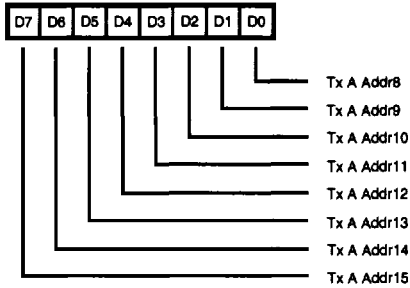

Address: 10111 (Bits 24-31)



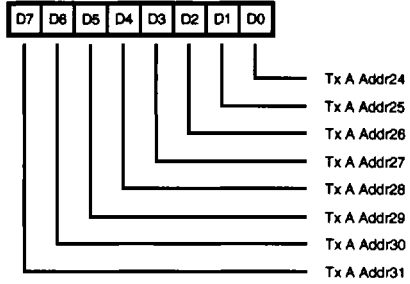


Figure 24. Transmit DMA Address Register Channel A

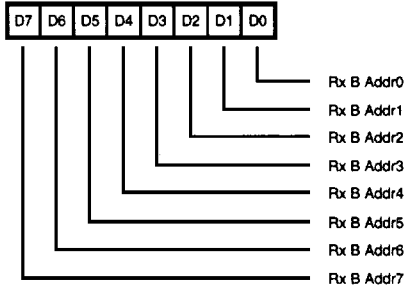
Address: 11000 (Bits 0-7)




Address: 11010 (Bits 16-23)

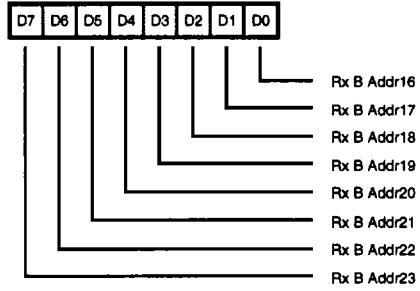

Address: 11001 (Bits 8-15)

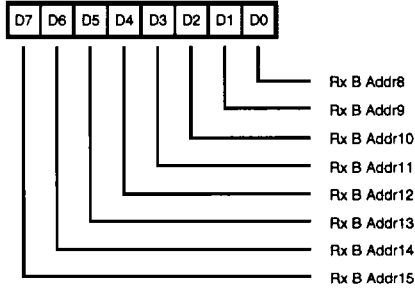

Address: 11011 (Bits 24-31)

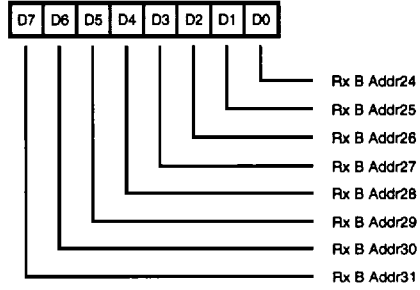


7


Figure 25. Receive DMA Address Register Channel B

CONTROL REGISTERS (Continued)

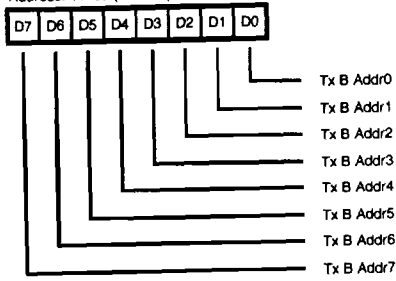
Address: 11100 (Bits 0-7)



Address: 11110 (Bits 16-23)

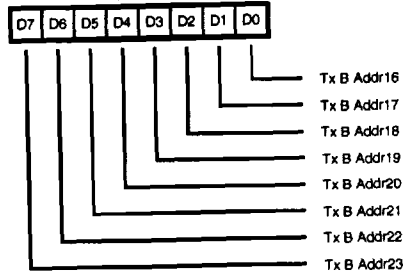

Address: 11101 (Bits 8-15)

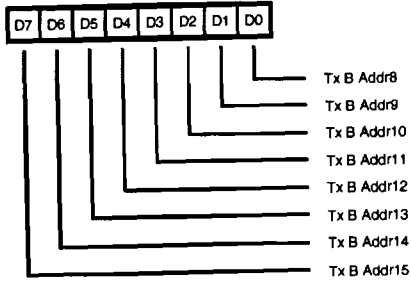

Address: 11111 (Bits 24-31)

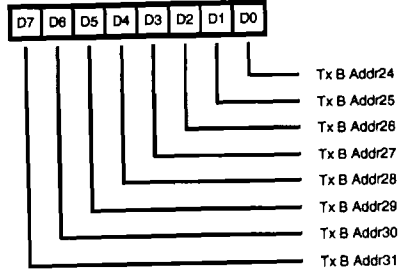


Figure 26. Transmit DMA Address Register Channel B

ABSOLUTE MAXIMUM RATINGS

Voltages on all pins,
with respect to GND-0.3 V to +7.0 V
Operating Ambient
Temperature See Ordering Information
Storage Temperature -85°C to 150°C

Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

STANDARD TEST CONDITIONS

The DC Characteristics and Capacitance section below apply for the following standard test conditions, unless otherwise noted. All voltages are referenced to GND. Positive current flows into the referenced pin. Standard conditions are as follows:

- $+4.75\text{ V} \leq V_{CC} \leq 5.25\text{ V}$
- $GND = 0\text{ V}$
- T_A as specified in Ordering Information

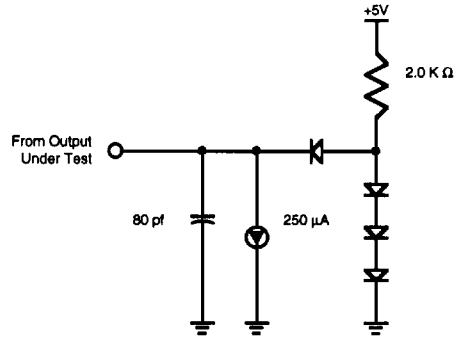


Figure 27. Standard Test Load

CAPACITANCE

Symbol	Parameter	Min	Max	Unit	Condition
C_{IN}	Input Capacitance		10	pF	Unmeasured Pins Returned to Ground
C_{OUT}	Output Capacitance		15	pF	
C_{IO}	Bidirectional Capacitance		20	pF	

Note:
f = 1 MHz over specified temperature range.
Unmeasured pins returned to ground.

MISCELLANEOUS

Transistor Count 52,047

DC CHARACTERISTICS
Z16C35

Symbol	Parameter	Min	Typ	Max	Unit	Condition
V_{IH}	Input High Voltage	2.2		$V_{CC} + 0.3$	V	
V_{IL}	Input Low Voltage	-0.3		0.8	V	
V_{OH1}	Output High Voltage	2.4			V	$I_{OH} = -1.6 \text{ mA}$
V_{OH2}	Output High Voltage	$V_{CC} - 0.8$			V	$I_{OH} = -250 \mu\text{A}$
V_{OL}	Output Low Voltage			0.4	V	$I_{OL} = +2.0 \text{ mA}$
I_{IL}	Input Leakage			$\pm 10.00 \mu\text{A}$		$0.4 < V_{IN} < +2.4 \text{ V}$
I_{OL}	Output Leakage			$\pm 10.00 \mu\text{A}$		$0.4 < V_{OUT} < +2.4 \text{ V}$
I_{CC1}	V_{CC} Supply Current		7	50	mA	$V_{CC} = 5 \text{ V}$, $V_{IH} = 4.8 \text{ V}$, $V_{IL} = 0.2 \text{ V}$

Note:
 $V_{CC} = 5 \text{ V} \pm 5\%$ unless otherwise specified, over specified temperature range.

AC CHARACTERISTICS

Note: See the corresponding figures following this table (Figures 28-49).

No	Symbol	Parameter	10 MHz		16 MHz		Notes
			Min	Max	Min	Max	
1	Tcyc	Bus Cycle Time	4TcPC		4TcPC		
2	TwASI	/AS Low Width	40		20		
3	TwASH	/AS High Width	90		55		
4	TwDSI	/DS Low Width	70		50		
5	TwDSh	/DS High Width	60		30		
6	TdAS(DS)	/AS Rise to /DS Fall Delay Time	5		5		
7	TdDS(AS)	/DS Rise to /AS Fall Delay Time	5		5		
8	TdDS(DRa)	/DS Fall to Data Active Delay	0		0		
9	TdDS(DRv)	/DS Fall to Data Valid Delay			85	75	
10	TdDS(DRn)	/DS Rise to Data Not Valid Delay	0		0	0	
11	TdDS(DRz)	/DS Rise to Data Float Delay			20	15	
12	TsCS(AS)	/CS to /AS Rise Setup Time	15		12		
13	ThCS(AS)	/CS to /AS Rise Hold Time	0		0		
14	TsADD(AS)	Direct Address to /AS Rise Setup Time	15		12		[1]
15	ThADD(AS)	Direct Address to /AS Rise Hold Time	5		5		[1]
16	TsSIA(AS)	Status /INTACK to /AS Rise Setup Time	15		10		
17	ThSIA(AS)	Status /INTACK to /AS Rise Hold Time	5		5		
18	TsAD(AS)	Address to /AS Rise Setup Time	15		10		
19	ThAD(AS)	Address to /AS Rise Hold Time	5		5		
20	TsRW(DS)	R/W to /DS Fall Setup Time	0		0		
21	ThRW(DS)	R/W to /DS Fall Hold Time	25		15		
22	TdDSf(RDY)	/DS Fall to /READY Fall Delay			50	40	
23	TdDSr(RDY)	/DS Rise to /READY Rise Delay			40	20	
24	TsDW(DS)	Write Data to /DS Fall Setup Time	0		0		
25	ThDW(DS)	Write Data to /DS Fall Hold Time	25		15		
26	TdRDY(DRv)	/READY Fall to Data Valid Delay			40	40	
28	TwRDl	/RD Low Width	70		50		
29	TwRDh	/RD High Width	60		30		

AC CHARACTERISTICS (Continued)

No	Symbol	Parameter	10 MHz		16 MHz		Notes
			Min	Max	Min	Max	
30	TdAS(RD)	/AS Rise to /RD Fall Delay Time	5		5		
31	TdRD(AS)	/RD Rise to /AS Fall Delay Time	5		5		
32	TdRD(DRa)	/RD Fall to Data Active Delay	0		0		
33	TdRD(DRv)	/RD Fall to Data Valid Delay		85		75	
34	TdRD(DRn)	/RD Rise to Data Not Valid Delay	0		0		
35	TdRD(DRz)	/RD Rise to Data Float Delay		20		15	
36	TdRDf(RDY)	/RD Fall to /READY Fall Delay		50		40	
37	TdRD _r (RDY)	/RD Rise to /READY Rise Delay		40		20	
38	TwWRI	/WR Low Width	70		50		
39	TwWRh	/WR High Width	60		30		
40	TdAS(WR)	/AS Rise to /WR Fall Delay Time	5		5		
41	TdWR(AS)	/WR Rise to AS Fall Delay Time	5		5		
42	TsDW(WR)	Write Data to /WR Fall Setup Time	0		0		
43	ThDW(WR)	Write Data to /WR Fall Hold Time	25		15		
44	TdWRf(RDY)	/WR Fall to /READY Fall Delay		50		40	
45	TdWR _r (RDY)	/WR Rise to /READY Fall Delay		40		20	
46	TsCS(DS)	/CS to /DS Fall Setup Time	0		0		[2]
47	ThCS(DS)	/CS to /DS Fall Hold Time	25		15		[2]
48	TsADD(DS)	Direct Address to /DS Fall Setup Time	0		0		[1,2]
49	ThADD(DS)	Direct Address to /DS Fall Hold Time	25		15		[1,2]
50	TsSIA(DS)	Status /INTACK to /DS Fall Setup Time	0		0		[2]
51	ThSIA(DS)	Status /INTACK to /DS Fall Hold Time	25		15		[2]
52	TsCS(RD)	/CS to /RD Fall Setup Time	0		0		[2]
53	ThCS(RD)	/CS to /RD Fall Hold Time	25		15		[2]
54	TsADD(RD)	Direct Address to /RD Fall Setup Time	0		0		[1,2]
55	ThADD(RD)	Direct Address to /RD Fall Hold Time	25		15		[1,2]
56	TsSIA(RD)	Status /INTACK to /RD Fall Setup Time	0		0		[2]
57	ThSIA(RD)	Status /INTACK to /RD Fall Hold Time	25		15		[2]
58	TsCS(WR)	/CS to /WR Fall Setup Time	0		0		[2]
59	ThCS(WR)	/CS to /WR Fall Hold Time	25		15		[2]
60	TsADD(WR)	Direct Address to /WR Fall Setup Time	0		0		[1,2]
61	ThADD(WR)	Direct Address to /WR Fall Hold Time	25		15		[1,2]
62	TsSIA(WR)	Status /INTACK to /WR Fall Setup Time	0		0		[2]
63	ThSIA(WR)	Status /INTACK to /WR Fall Hold Time	25		15		[2]
78	TdDSI(RDY)	/DS Fall (INTACK) to /READY Fall Delay		300		250	[4]
81	TsIEI(DSI)	IEI to /DS Fall (INTACK) Setup Time	60		40		
82	ThIEI(DSI)	IEI to /DS Rise (INTACK) Hold Time	0		0		
83	TdIEI(IEO)	IEI to IEO Delay		60		40	
84	TdAS(IEO)	/AS Rise or Status INTACK to IEO Delay		60		40	
85	TdDSI(INT)	/DS Fall (INTACK) to /INT Inactive Delay		200		170	
86	TdDSI(Wf)	/DS Fall (INTACK) to /WAIT Fall Delay		40		35	
87	TdDSI(Wr)	/DS Fall (INTACK) to /WAIT Rise Delay		300		175	[4]
88	TdW(DRy)	/WAIT Rise to Data Valid Delay		40		35	
89	TdRDl(RDY)	/RD Fall (INTACK) to /READY Fall Delay		300		175	[4]

AC CHARACTERISTICS (Continued)


No	Symbol	Parameter	10 MHz		16 MHz		Notes
			Min	Max	Min	Max	
91	TsIEI(RDI)	IEI to /RD Fall (INTACK) Setup Time	60		50		
92	ThIEI(RDI)	IEI to /RD Rise (INTACK) Hold Time	0		0		
93	TdRDI(INT)	/RD Fall (INTACK) to /INT Inactive Delay		200		170	
94	TdRDI(Wf)	/RD Fall (INTACK) to /WAIT Fall Delay		40		35	
95	TdRDI(Wr)	/RD Fall (INTACK) to /WAIT Rise Delay		300		175	[4]
96	TwPIA1	Pulsed /INTACK Low Width	70		55		
97	TwPIAh	Pulsed /INTACK High Width	60		45		
98	TdAS(PIA)	/AS Rise to Pulsed /INTACK Fall Delay Time	5		5		
99	TdPIA(AS)	Pulsed /INTACK Rise to /AS Fall Delay Time	5		5		
100	TdPIA(DRa)	Pulsed /INTACK Fall to Data Active Delay	0		0		
101	TdPEA(DRn)	Pulsed /INTACK Rise to Data Not Valid Delay	0		0		
102	TdPIA(DRz)	Pulsed /INTACK Rise to Data Float Delay		20		15	
103	TsIEI(PIA)	IEI to Pulsed /INTACK Fall Setup Time	60		50		
104	ThIEI(PIA)	IEI to Pulsed /INTACK Rise Hold Time	0		0		
105	TdPIA(IEO)	Pulsed /INTACK Fall to IEO Delay		60		50	
106	TdPIA(INT)	Pulsed /INTACK Fall to /INT Inactive Delay		200		170	
107	TdPIA(RDY)	Pulsed /INTACK Fall to /READY Fall Delay		300		200	[4]
108	TdPIAr(RDY)	Pulsed /INTACK Rise to /READY Rise Delay		40		35	
109	TdPIA(Wf)	Pulsed /INTACK Fall to /WAIT Fall Delay		40		35	
110	TdPIA(Wr)	Pulsed /INTACK Fall to /WAIT Rise Delay		300		175	[4]
111	TdSIA(INT)	Status /INTACK Fall to /INT Inactive Delay		200		200	[2]
113	TwRESl	/RESET Low Width	170		140		
114	TwRESH	/RESET High Width	60		40		
115	TdRES(STB)	/RESET Rise to /Strobe Fall	60		40		[3]
116	TdPC(BUSa)	PCLK Rise to Bus Active Delay		40		35	[5]
117	TdPC(BRQ)	PCLK Rise to /BUSREQ Delay		40		35	
118	TsBAK(PC)	/BUSACK to PCLK Rise Setup Time	10		10		
119	ThBAK(PC)	/BUSACK to PCLK Rise Hold Time	30		20		
120	TwPCI	PCLK Low Width	35		26		
121	TwPCh	PCLK High Width	35		26		
122	TcPC	PCLK Cycle Time	100		61		
123	TfPC	PCLK Fall Time		10		5	
124	TrPC	PCLK Rise Time		10		5	
125	TdPCr(UAS)	PCLK Rise to /UAS Delay		30		25	[5]
126	TwUASl	/UAS Low Width	30		25		[5,6]
127	TdPCf(UAS)	PCLK Fall to /UAS Delay		30		25	[5]
128	TdPCr(AS)	PCLK Rise to /AS Delay		30		25	[5]
129	TwASl	/AS Low Width	30		25		[5,6]
130	TdPCf(AS)	PCLK Fall to /AS Delay		30		25	[5]
131	TdAS(DSr)	/AS Rise to /DS Fall (READ) Delay	30		25		[5,7]
132	TdDS(PCr)	PCLK Rise to /DS Delay		30		25	[5]
133	TwDSlR	/DS Low Width (READ)	135		90		[5,8]
134	TdPCf(DS)	PCLK Fall to /DS Delay		30		25	[5]
135	TsDR(DS)	Read Data to /DS Rise Setup Time	30		25		[5]

AC CHARACTERISTICS (Continued)

No	Symbol	Parameter	10 MHz		16 MHz		Notes
			Min	Max	Min	Max	
136	ThDR(DS)	Read Data to /DS Rise Hold Time	0		0		[5]
137	TdPC(RW)	PCLK Rise to R/W Delay		30		25	[5]
138	TdAS(RD)	/AS Rise to /RD Fall Delay	30		25		[5,7]
139	TdPCr(RD)	PCLK Rise to /RD Delay		30		25	[5]
140	TwRDI	/RD Low Width	135		90		[5,8]
141	TdPC(RD)	PCLK Fall to /RD Delay		30		25	[5]
142	TsDR(RD)	Read Data to /RD Rise Setup Time	30		25		[5]
143	ThDR(RD)	Read Data to /RD Rise Hold Time	0		0		[5]
144	TdPC(ADD)	PCLK Rise to Direct Address Delay		30		25	[1,5]
145	TdPC(AD)	PCLK Rise to Address Delay		40		40	[5]
146	ThAD(PC)	Address to PCLK Rise Hold Time	0		0		[5]
147	TdPC(ADz)	PCLK Rise to Address Float Delay		50		45	[5]
148	TdPC(ADa)	PCLK Rise to Address Active Delay		40		35	[5]
149	TsAD(UAS)	Address to /UAS Rise Setup Time	20		10		[5]
150	ThAD(UAS)	Address to /UAS Rise Hold Time	20		10		[5]
151	TsAD(AS)	Address to /AS Rise Setup Time	20		10		[5]
152	ThAD(AS)	Address to /AS Rise Hold Time	20		10		[5]
153	TsW(PC)	/WAIT to PCLK Fall Setup Time	10		10		[5]
154	ThW(PC)	/WAIT to PCLK Fall Hold Time	30		20		[5]
155	TsRDY(PC)	/READY to PCLK Fall Setup Time	10		10		[5]
156	ThRDY(PC)	/READY to PCLK Fall Hold Time	30		20		[5]
157	ThDW(PC)	Write Data to PCLK Rise Hold Time	0		0		[5]
158	TdAS(DSw)	/AS Rise to /DS Fall (WRITE) Delay	85		45		[5,9]
159	TsDW(DS)	Write Data to /DS Fall Setup Time	30		25		[5,6]
160	TwDSlw	/DS Low Width (WRITE)	90		70		[5,10]
161	ThDW(DS)	Write Data to /DS Rise Hold Time	30		25		[5, 7]
162	TdAS(WR)	/AS Rise to /WR Fall Delay	85		55		[5,9]
163	TsDW(WR)	Write Data to /WR Fall Setup Time	30		25		[5,6]
164	TwWRI	/WR Low Width	90		55		[5,10]
165	ThDW(WR)	Write Data to /WR Rise Hold Time	30		25		[5,7]
166	TdPC(WR)	PCLK Fall to /WR Delay		30		25	[5]
167	TdPC(BUSz)	PCLK Rise to Bus Float Delay		50		40	[5]

Notes:

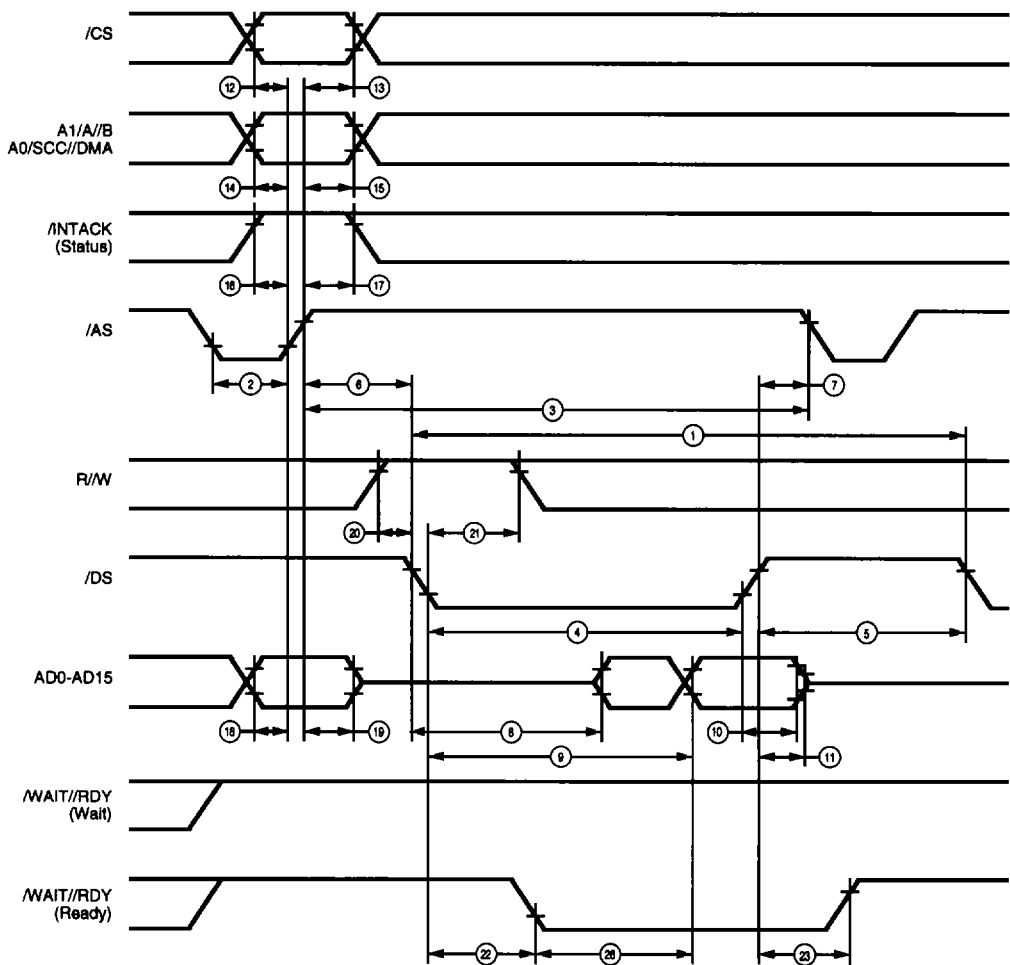- [1] Direct address is A1/A/B or A0/SCC//DMA.
- [2] The parameter applies only when /AS is not present.
- [3] /Strobe is any of /DS, /RD, /WR or Pulsed /INTACK.
- [4] Clock-cycle dependent, $2TcPC + TwPCl + TfPC + 55$.
- [5] Parameter applies only while ISCC is bus master.
- [6] Clock-cycle dependent, $TwPCh + TfPC - 15$.
- [7] Clock-cycle dependent, $TwPC1 + TrPC - 15$.
- [8] Clock-cycle dependent, $TcPC + TwPCh + TrPC - 10$.
- [9] Clock-cycle dependent, $TcPC - 15$.
- [10] Clock-cycle dependent, $TcPC - 10$.
- [11] Timings in nanoseconds

AC CHARACTERISTICS (Continued)
 Timing Diagrams

Figure 28. Multiplexed /DS Read Cycle

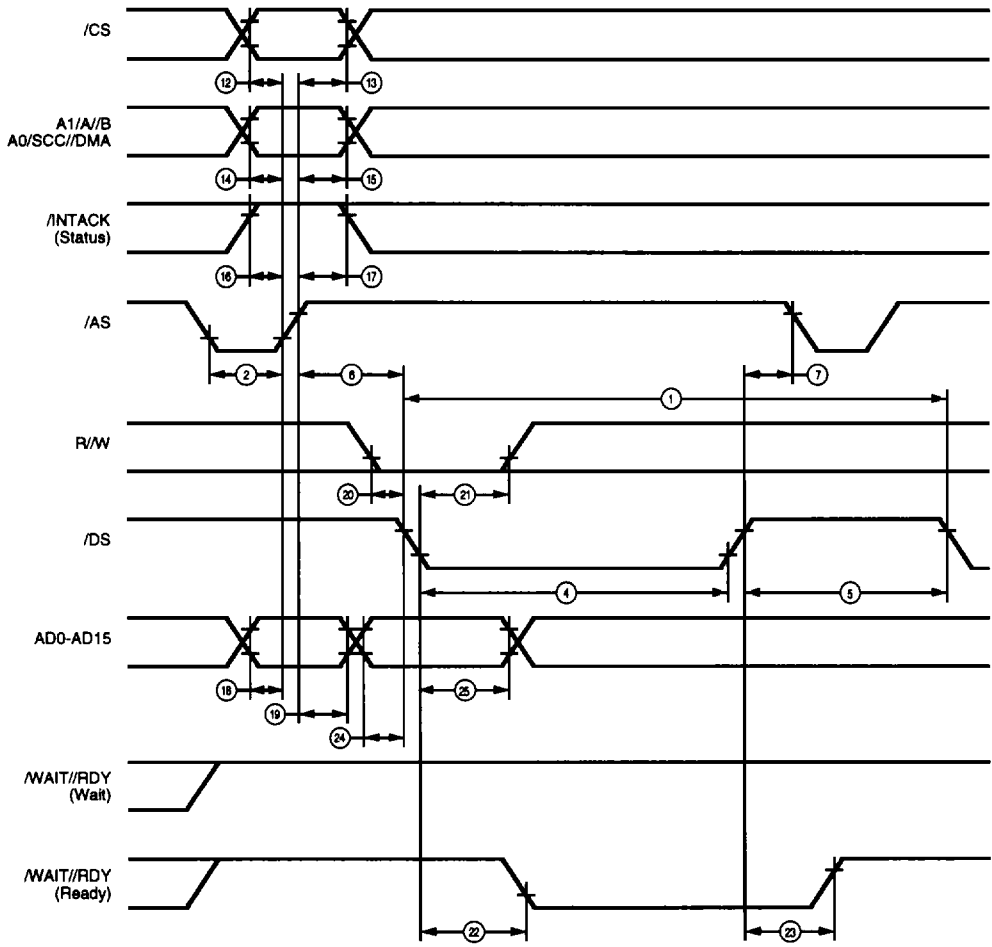


Figure 29. Multiplexed /DS Write Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams

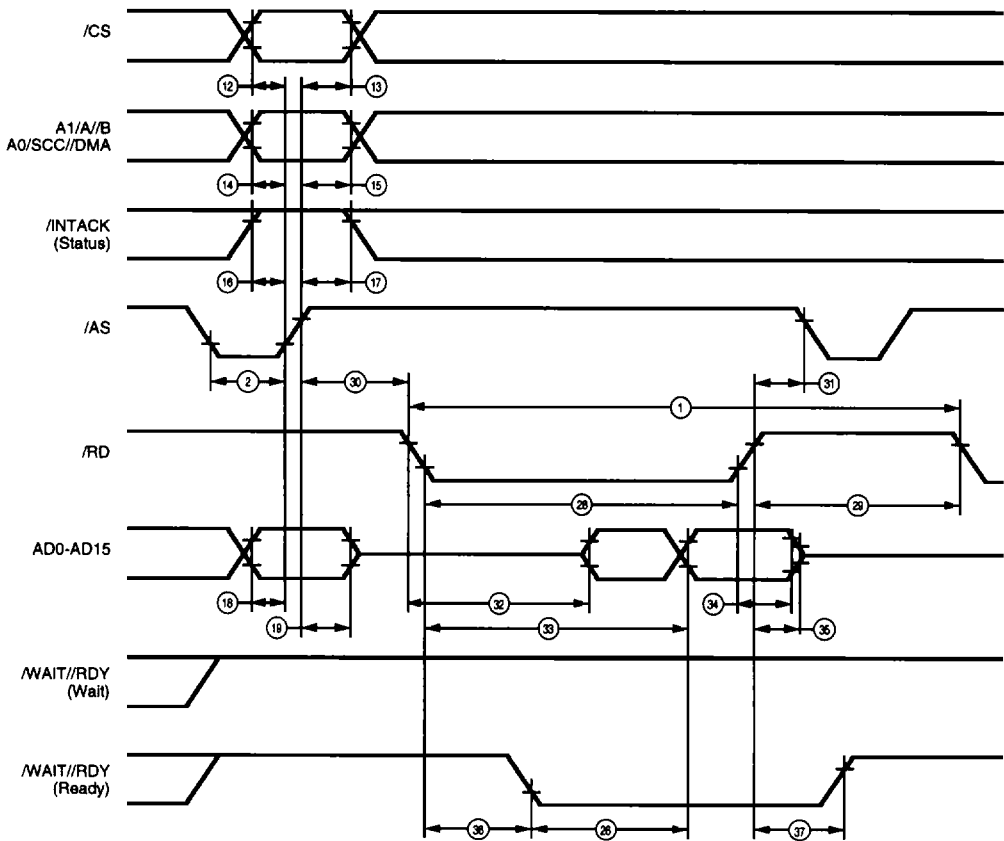


Figure 30. Multiplexed /RD Read Cycle

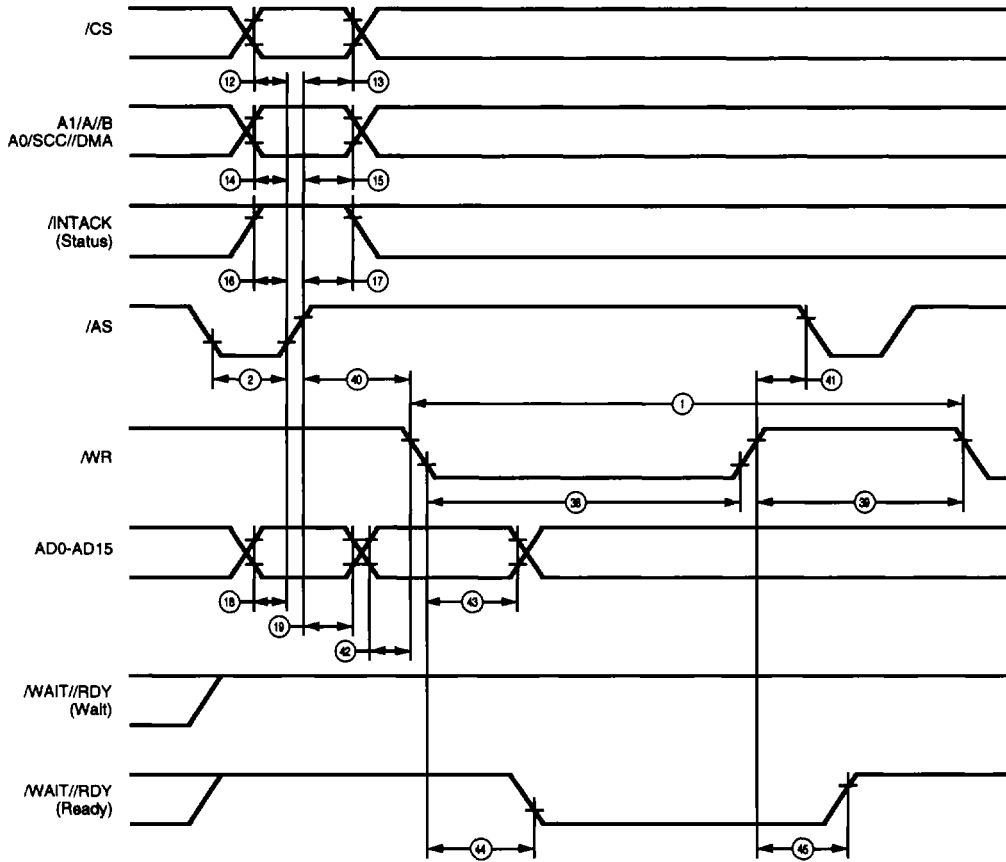


Figure 31. Multiplexed /WR Write Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams

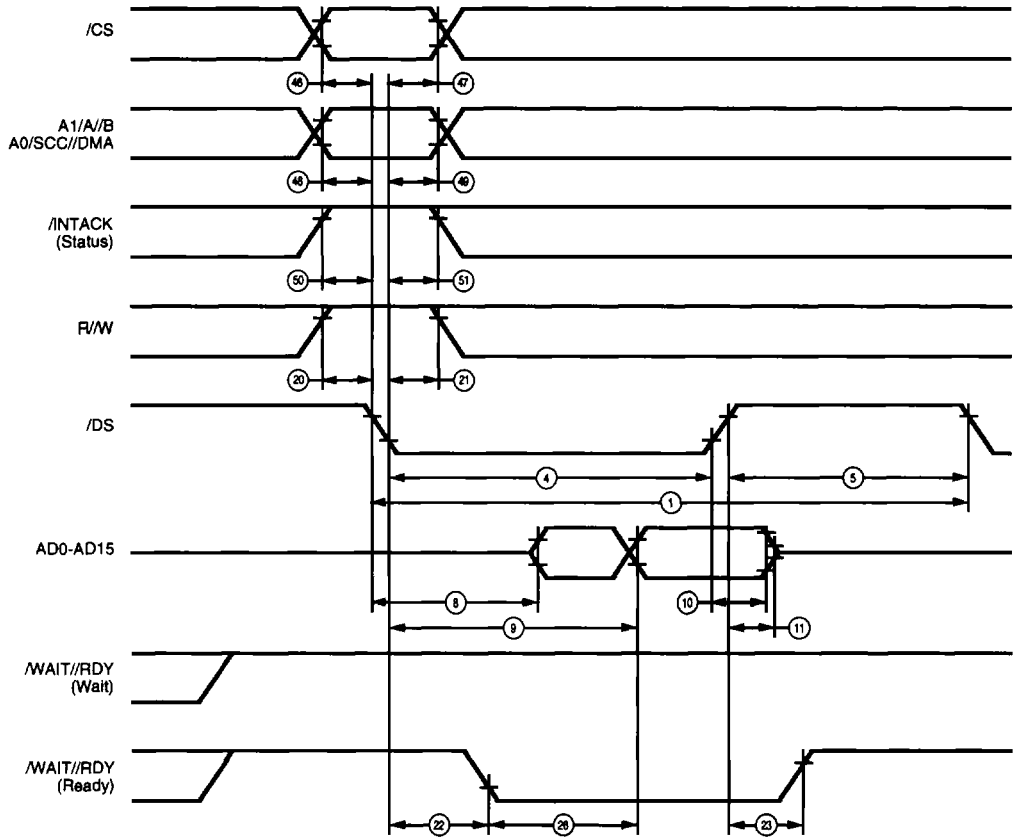


Figure 32. Non-multiplexed /DS Read Cycle

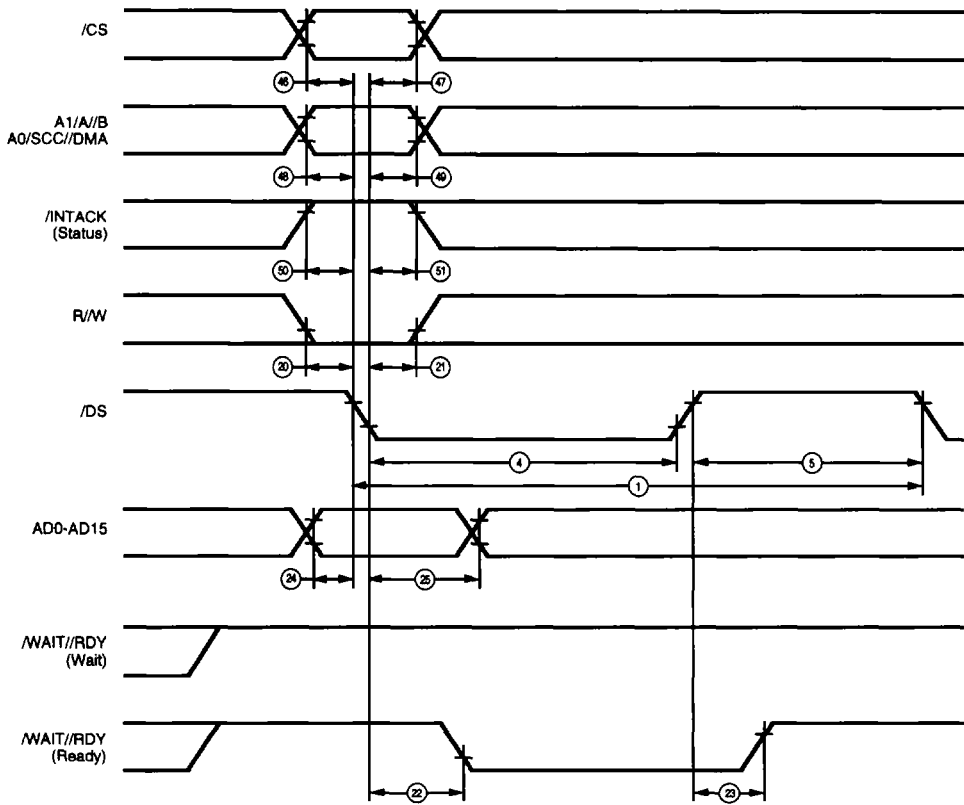


Figure 33. Non-multiplexed /DS Write Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams

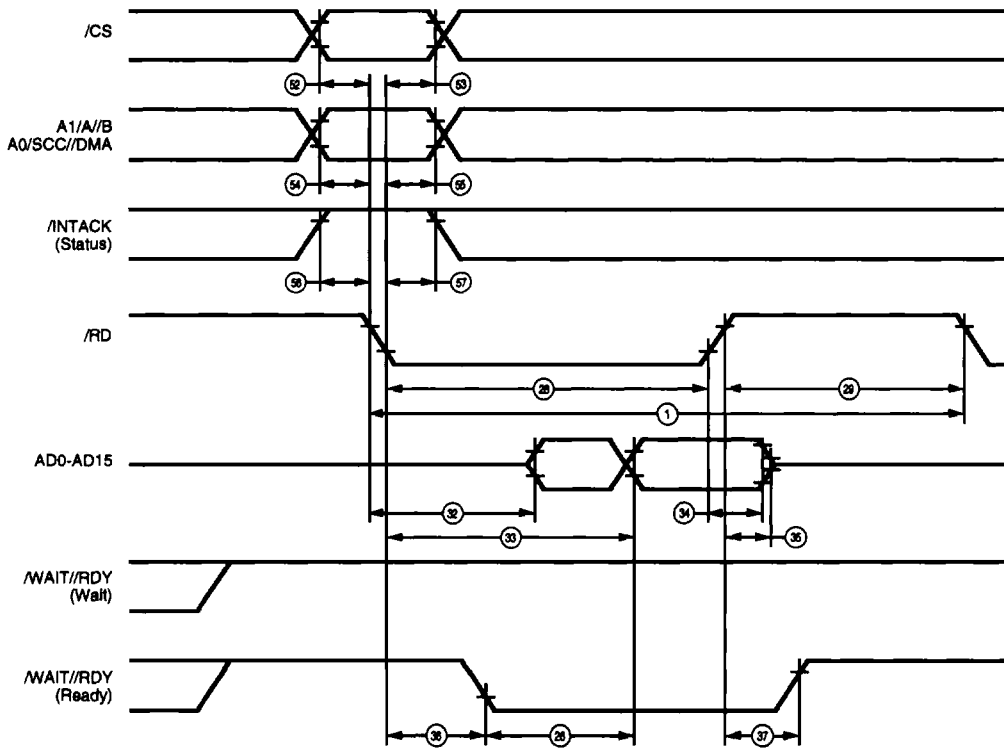


Figure 34. Non-multiplexed /RD Read Cycle

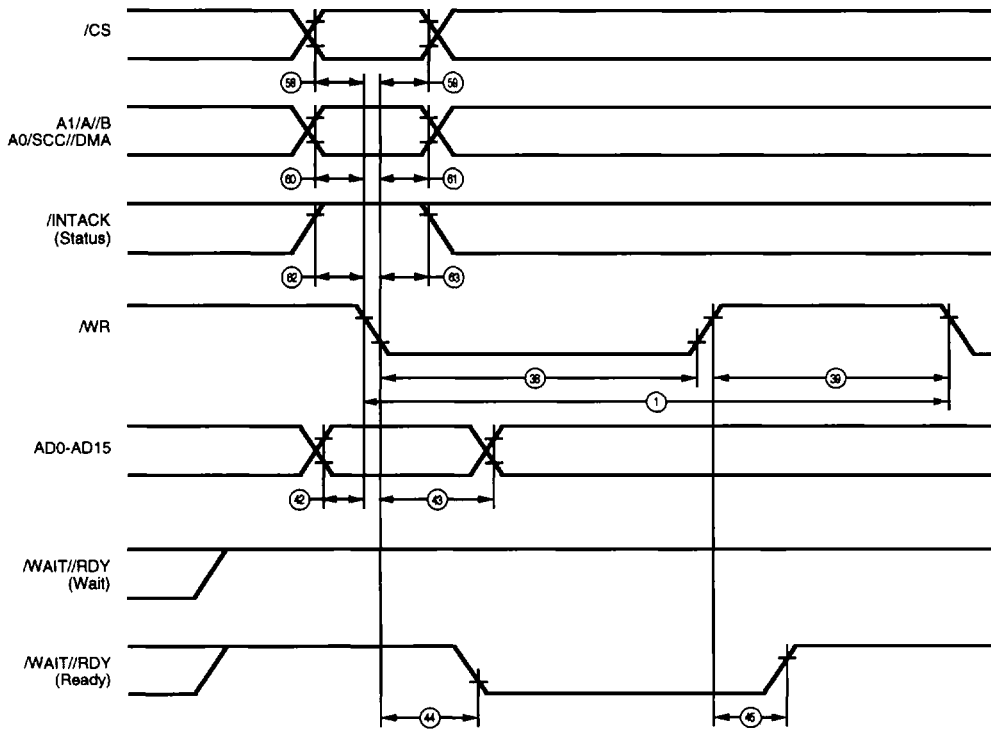


Figure 35. Non-multiplexed /WR Write Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams


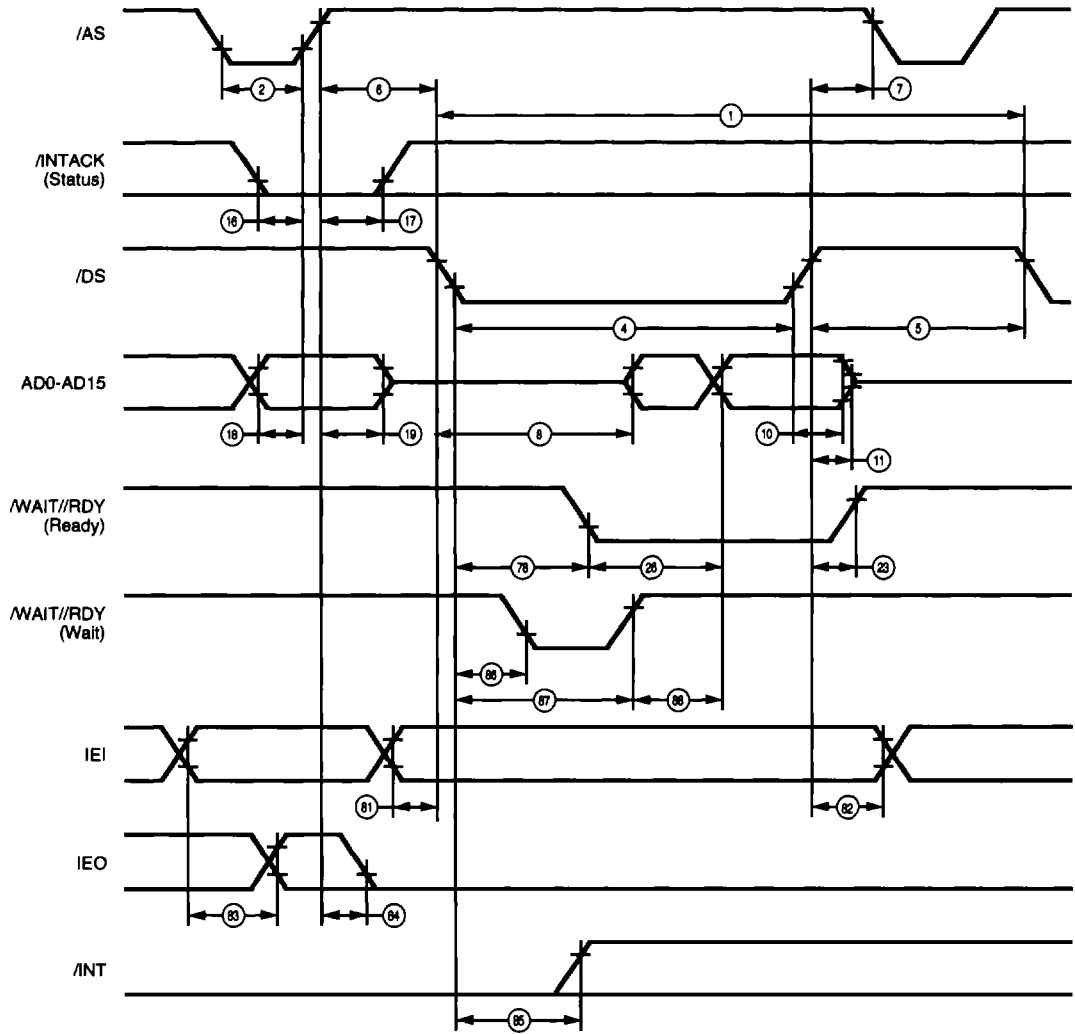


Figure 36. Multiplexed /DS Status INTACK Cycle

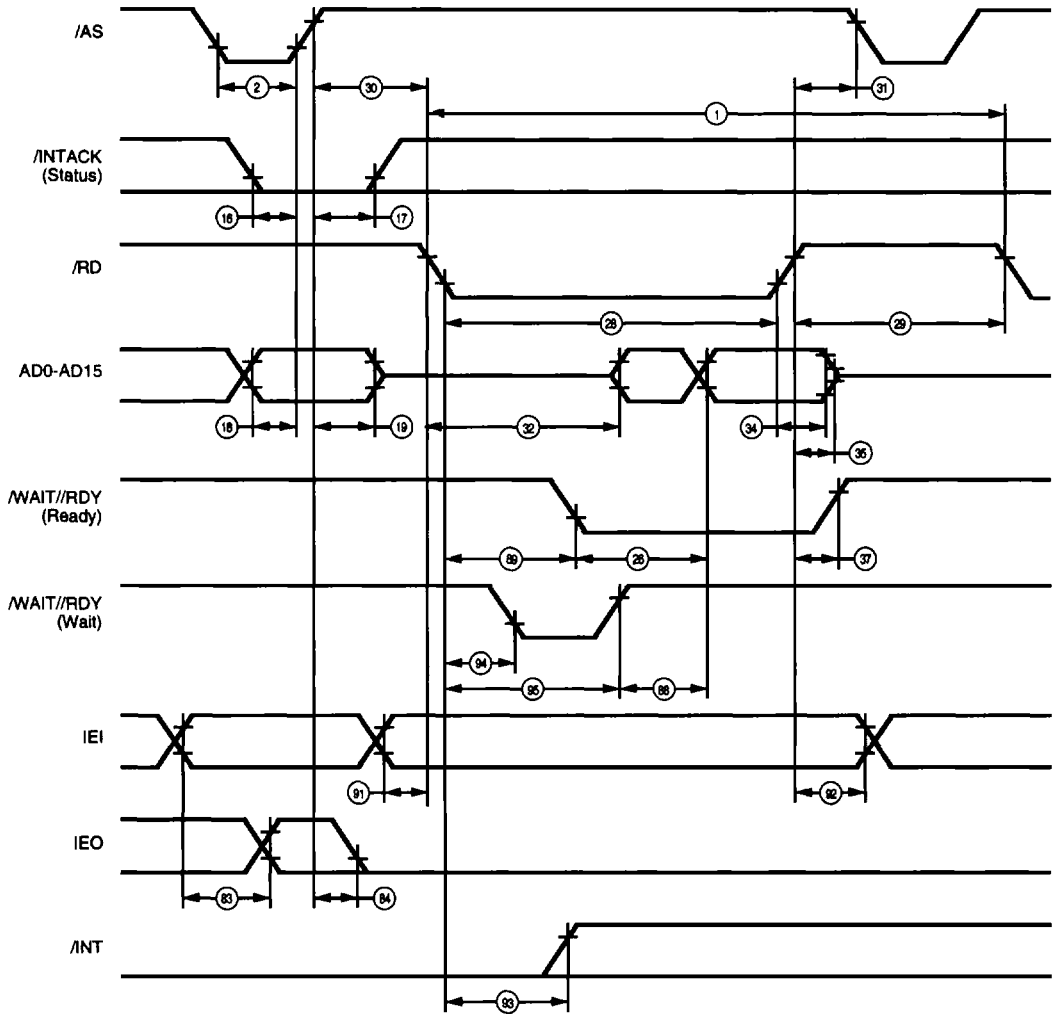

7

Figure 37. Multiplexed /RD Status INTACK Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams


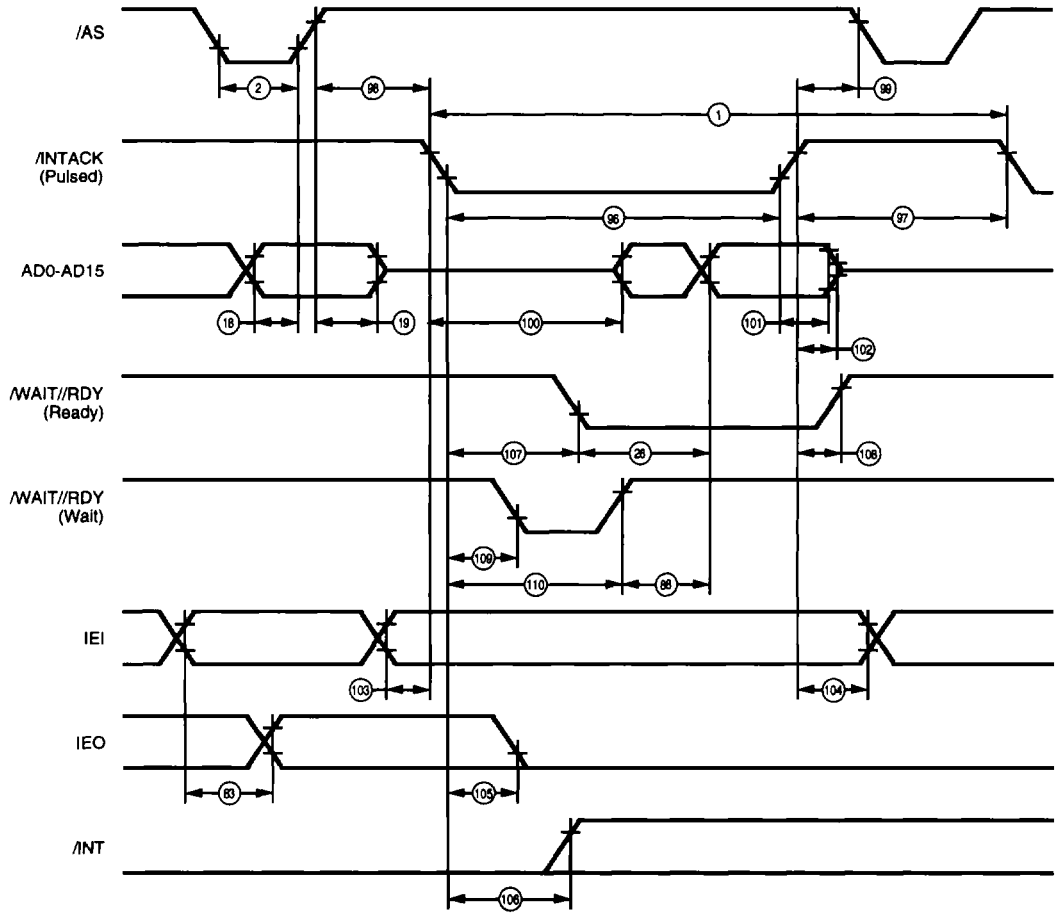


Figure 38. Multiplexed Pulsed INTACK Cycle

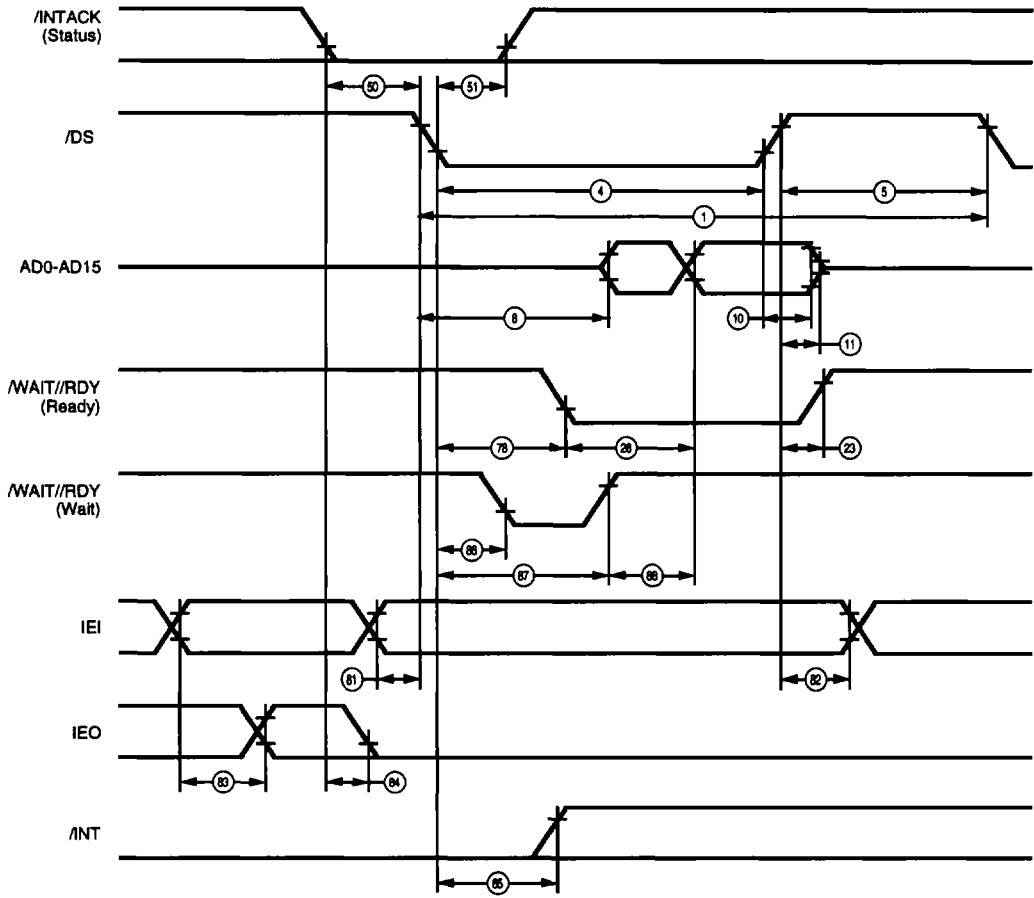

7

Figure 39. Non-multiplexed /DS INTACK Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams


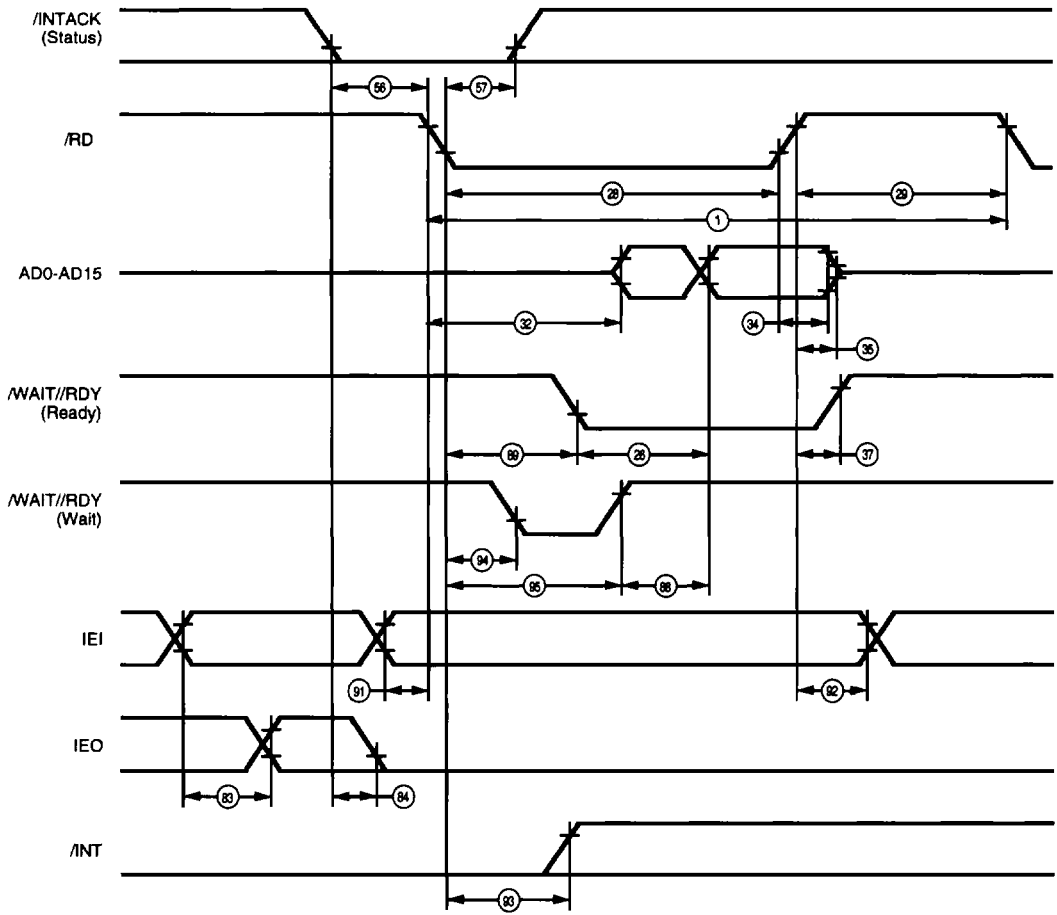


Figure 40. Non-multiplexed /RD Status INTACK Cycle

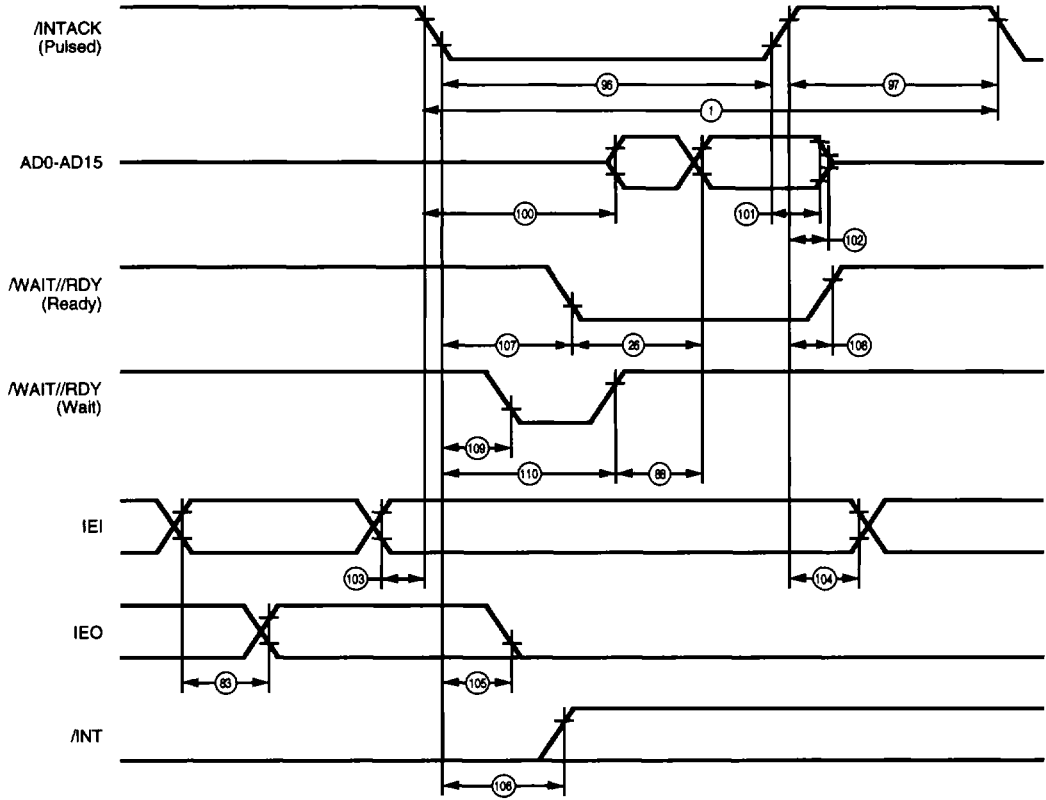

7

Figure 41. Non-multiplexed Pulsed INTACK Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams

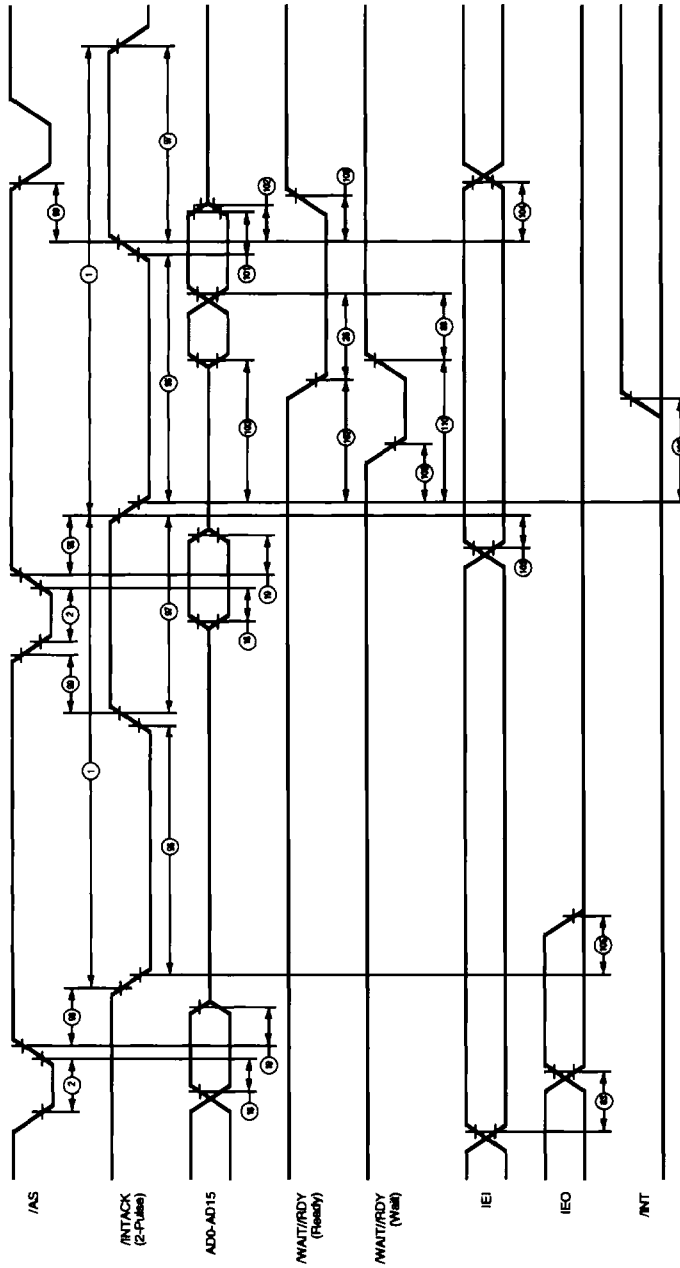


Figure 42. Multiplexed Double-Pulse INTACK Cycle

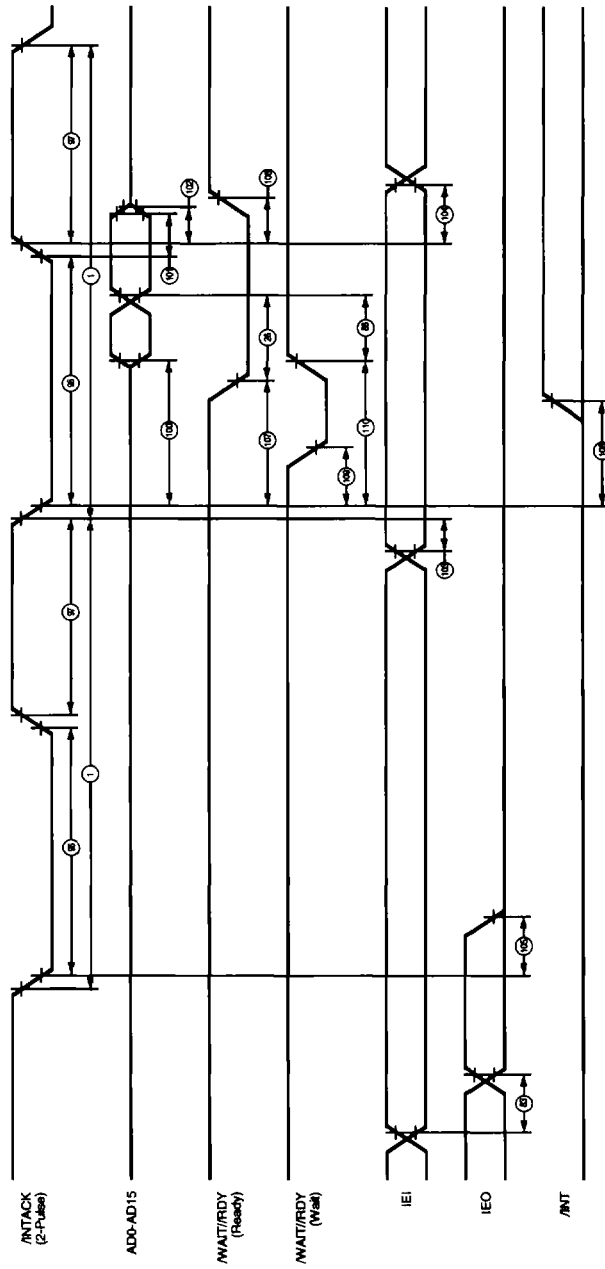


Figure 43. Non-multiplexed Double-Pulsed INTACK Cycle

AC CHARACTERISTICS (Continued)
Timing Diagrams

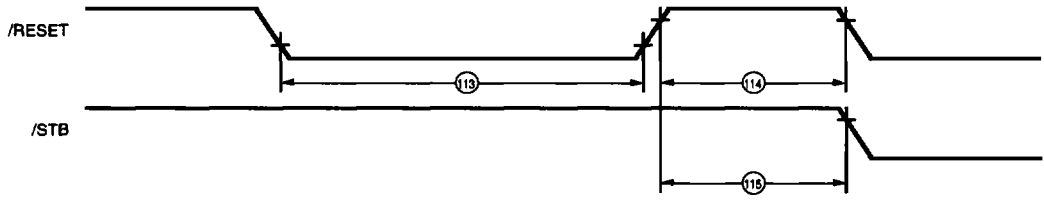


Figure 44. Reset

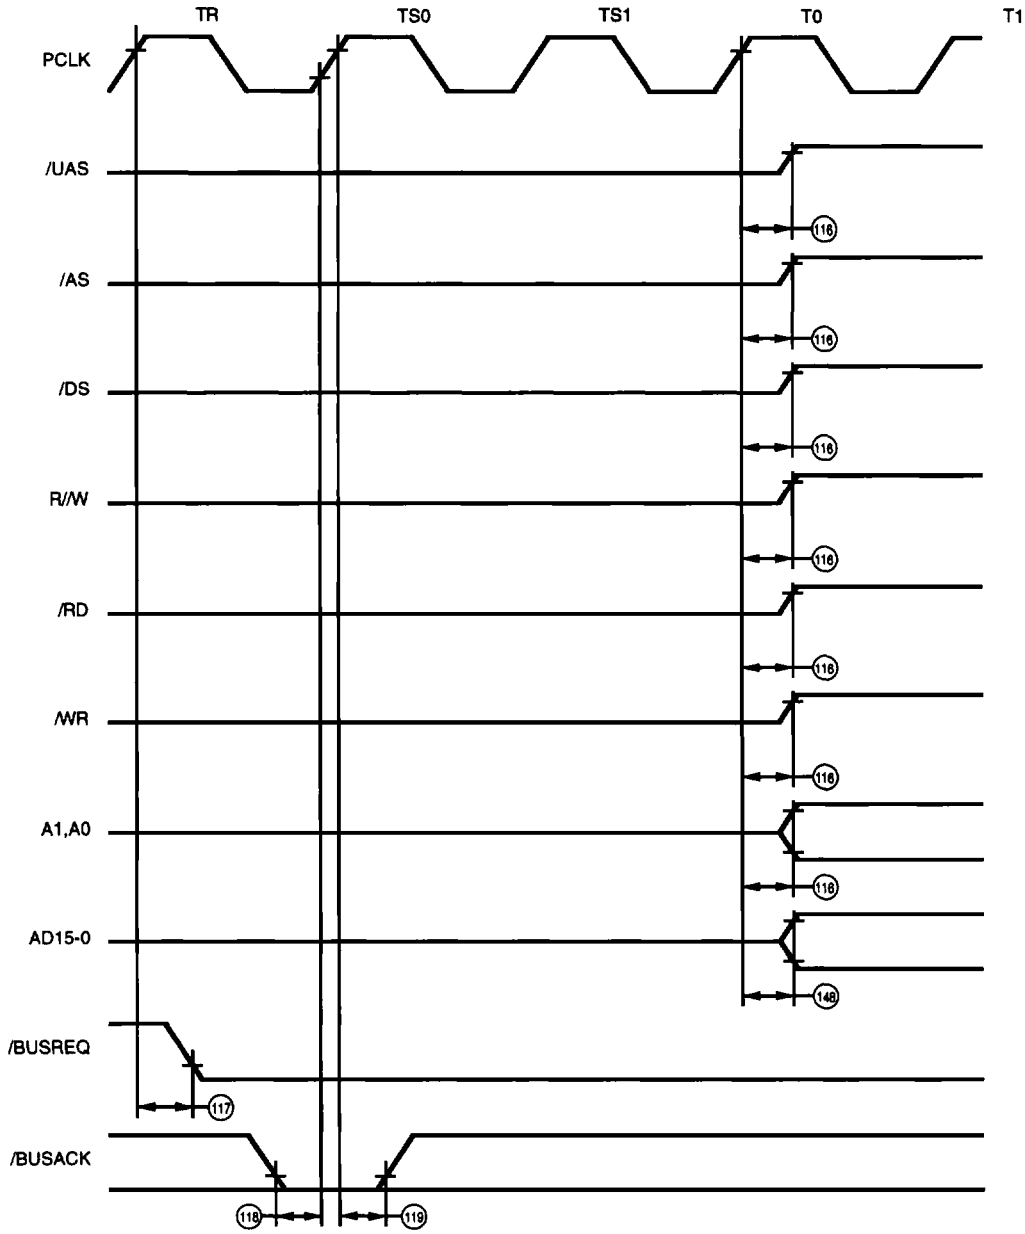


Figure 45. Z16C35 Start-up

AC CHARACTERISTICS (Continued)
Timing Diagrams

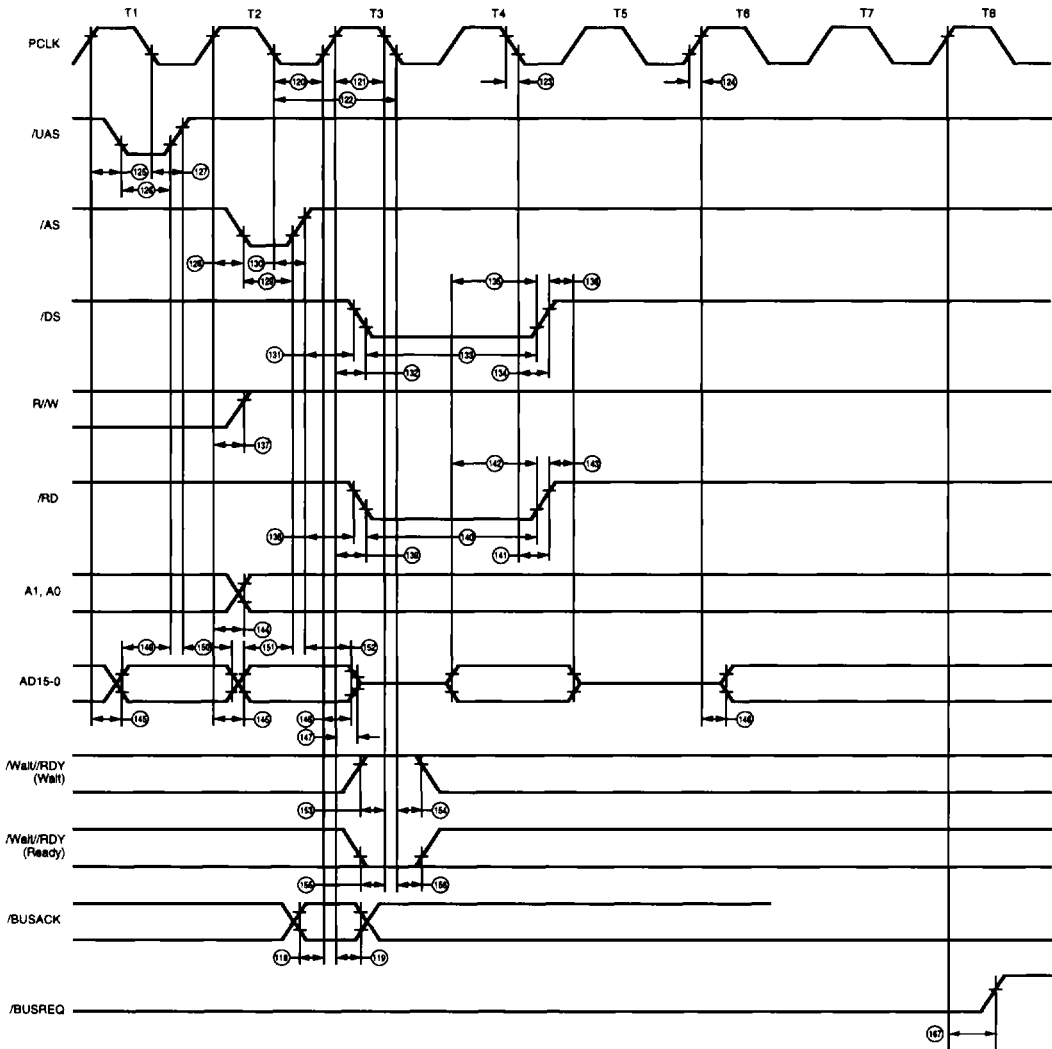


Figure 46. Z16C35 Memory Read

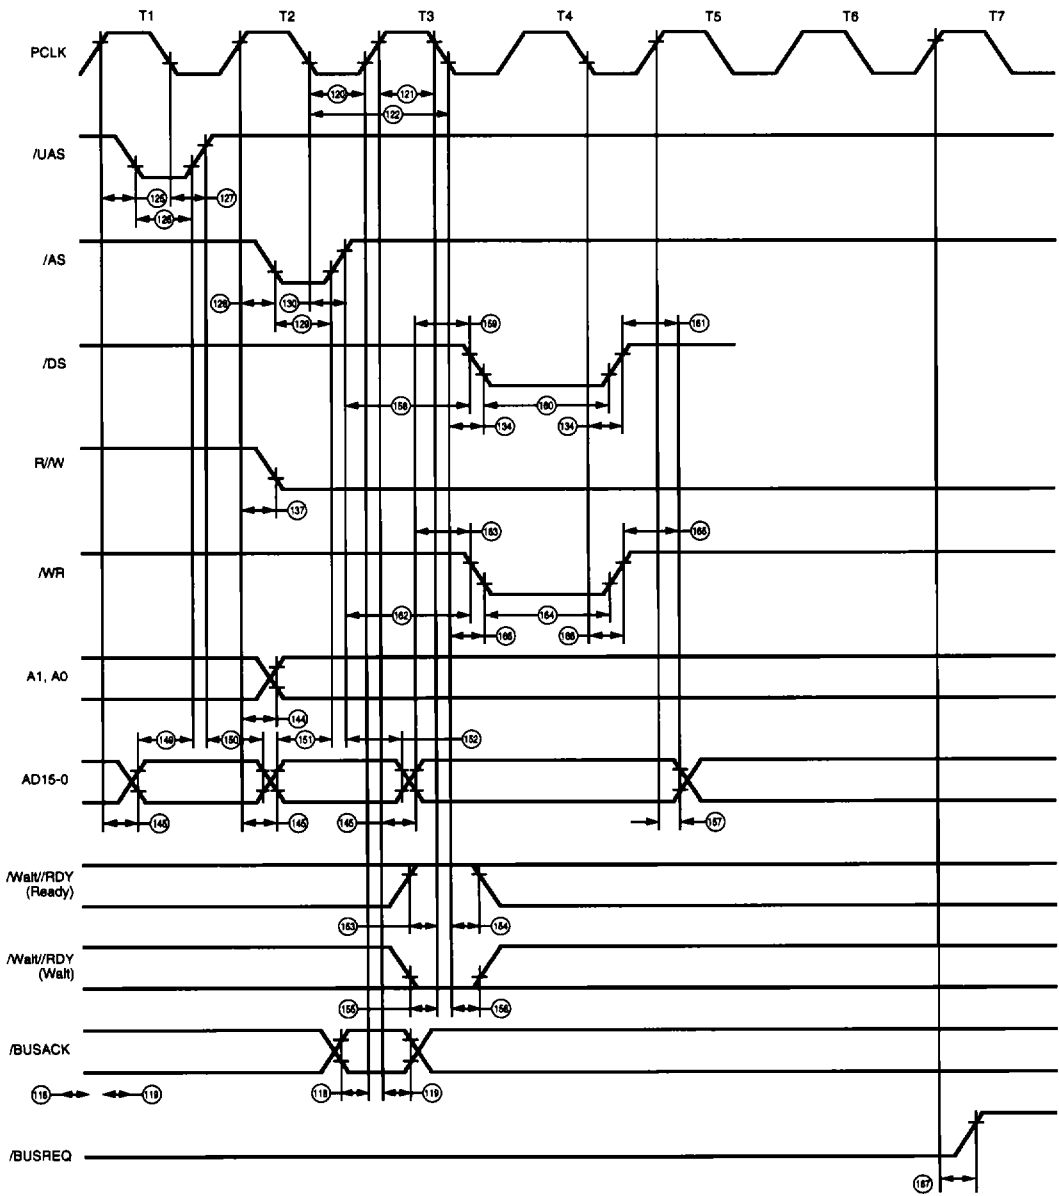


Figure 47. Z16C35 Memory Write

AC CHARACTERISTICS (Continued)
Timing Diagrams

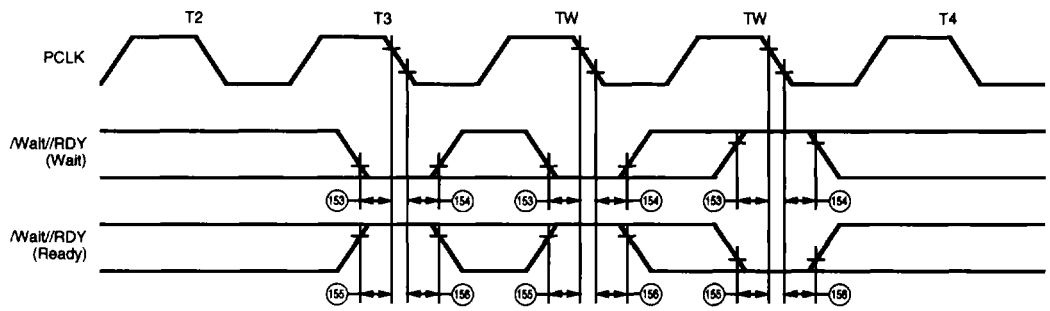


Figure 48. Wait and Ready Timing

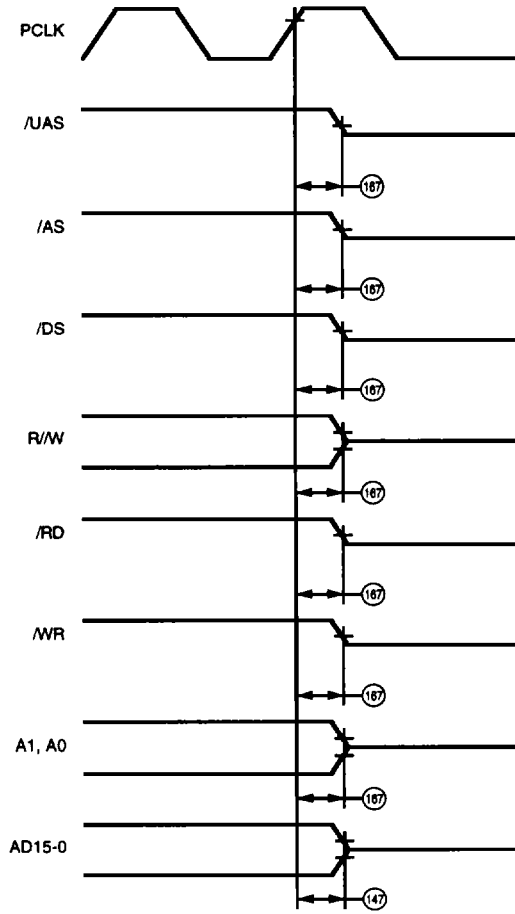


Figure 49. BUS Release

AC CHARACTERISTICS (Continued)
General Timing

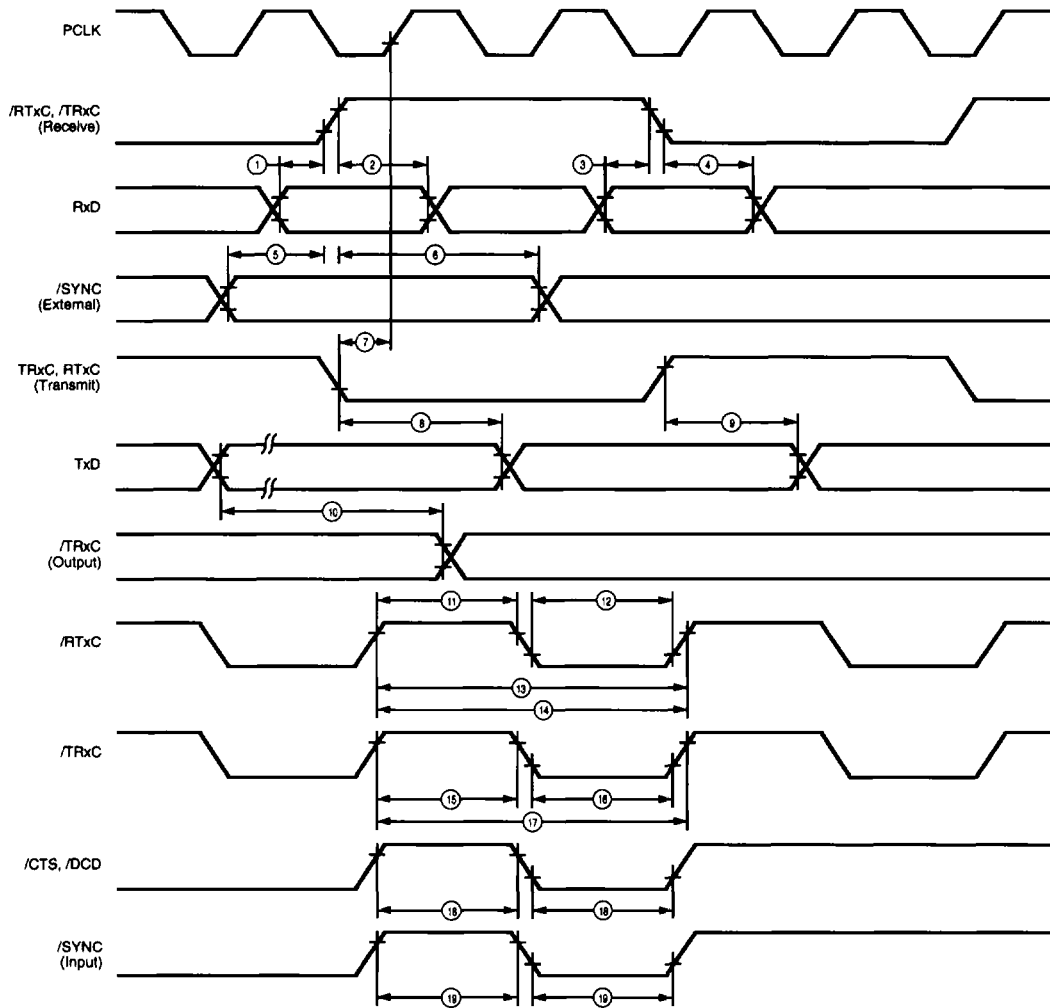


Figure 50. Z16C35 General Timing

No	Symbol	Parameter	10 MHz		16 MHz		Notes
			Min	Max	Min	Max	
1	TsRXD(RXCr)	RxD to /RxC Rise Setup Time (x1 mode)	0		0		[1]
2	ThRXD(RXCr)	RxD to /RxC Rise Hold Time (x1 mode)	150		60		[1]
3	TsRXD(RXCf)	RxD to /RxC Fall Setup Time (x1 mode)	0		0		[1,5]
4	ThRXD(RXCf)	RxD to /RxC Fall Hold Time (x1 mode)	150		60		[1,5]
5	TsSY(RXC)	/SYNC to /RxC Rise Setup Time	-200		-100		[1]
6	ThSY(RXC)	/SYNC to RxC Rise Hold Time	5TcPc		5TcPc		[1]
7	TsTXC(PC)	/TxC to PCLK Setup Time	0		0		[2,4]
8	TdTXCf(TXD)	/TxC Fall to TxD Delay (x1 mode)		150		85	[2]
9	TdTxCr(TXD)	/TxC Rise to TxD Delay (x1 mode)		150		85	[2,5]
10	TdTXD(TRX)	TxD to /TRXC Delay (Send Clock Echo)		200		80	
11	TwRTXh	/RTxC High Width	150		80		[6]
12	TwRTXl	/RTxC Low Width	150		80		[6]
13	TcRTX	/RTxC Cycle Time (RxD, TxD)	400		244		[6,7]
14	TcRTXX	Crystal Oscillator Period	100	1000	100	1000	[3]
15	TwTRXh	/TRxC High Width	150		80		[6]
16	TwTRXl	/TRxC Low Width	150		80		[6]
17	TcTRX	/TRxC Cycle Time (RxD, TxD)	400		244		[6,7]
18	TwEXT	/DCD or /CTS Pulse Width	200		70		
19	TwSY	/SYNC Pulse Width	200		70		

Notes:

- [1] /RxC is /RTxC or /TRxC, whichever is supplying the receive clock.
- [2] /TxC is /TRxC or /RTxC, whichever is supplying the transmit clock.
- [3] Both /RTxC and /SYNC have 30 pf capacitors to ground connected to them.
- [4] Parameter applies only if the data rate is one-fourth the PCLK rate. In all other cases, no phase relationship between /RxC and PCLK or /TxC and PCLK is required.
- [5] Parameter applies only to FM encoding/decoding.
- [6] Parameter applies only for transmitter and receiver; DPLL and baud rate generator requirements are identical to case PCLK requirements.
- [7] The maximum receive or transmit data rate is one-fourth PCLK.
- [8] Timings in nanoseconds.

AC CHARACTERISTICS (Continued)
System Timing

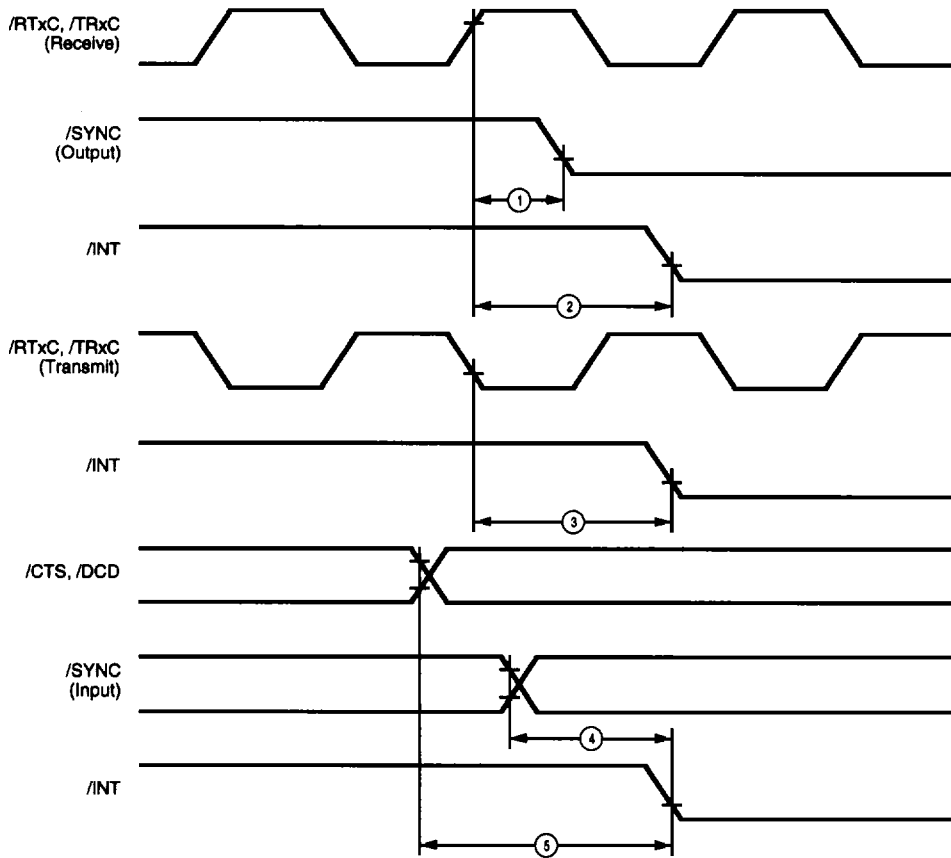


Figure 51. Z16C35 System Timing

No	Symbol	Parameter	10 MHz		16 MHz		Notes[3]
			Min	Max	Min	Max	
1	TdRXC(SY)	/RxC Rise to /SYNC	4	7	4	7	[1]
2	TdRXC(INT)	RxC Rise to /INT Valid Delay	10	16	10	16	[1]
3	TdTXC(INT)	/TxC Fall to /INT Valid Delay	6	10	6	10	
4	TdSY(INT)	/SYNC Transition to /INT Valid Delay	2	6	2	6	
5	TdEXT(INT)	/DCD or /CTS Transition to /INT Valid Delay	2	6	2	6	

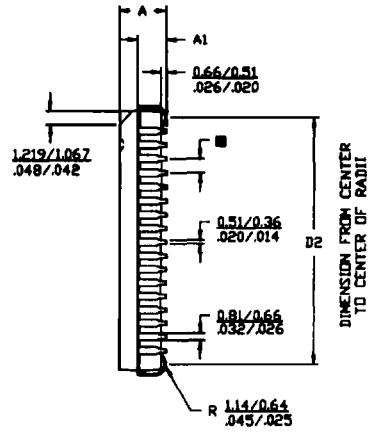
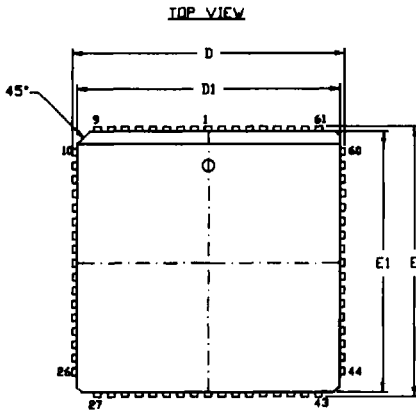
Notes:

[1] /RxC is /RTXC or /TRxC, whichever is supplying the receive clock.

[2] /TxC is /TRxC or /RTxC, whichever is supplying the transmit clock.

[3] Units equal to TcPc.

PACKAGE INFORMATION



NOTES:

1. CONTROLLING DIMENSIONS : INCH
2. LEADS ARE COPLANAR WITHIN .004 IN.
3. DIMENSION : $\frac{MM}{INCH}$

SYMBOL	MILLIMETER		INCH	
	MIN	MAX	MIN	MAX
A	4.32	4.57	.170	.180
A1	2.67	2.92	.105	.115
D/E	25.02	25.40	.985	1.000
D1/E1	24.13	24.33	.950	.958
D2	22.86	23.62	.900	.930
■	1.27 TYP		.050 TYP	

68-Pin PLCC Package Diagram

ORDERING INFORMATION**Z16C35**

68-Pin PLCC

10 MHz

Z16C3510VSC

16 MHz

Z16C3516VSC

Package

V=Plastic Leaded Chip Carrier

C=Ceramic DIP

L=Ceramic LCC

F=Plastic Quad Flat Pack

Temperature

E=-40°C to +105°C

S=0°C to +70°C

Speeds

10=10 MHz

16=16 MHz

Environmental

C=Plastic Standard

D=Plastic Stressed

E=Hermetic Stressed

Example:**Z 16C35 34 A S C** is a Z16C35, 34 MHz, PLCC, 0°C to +70°C, Plastic Standard Flow