


product: DELPHI PN 12147474  
 material: CUNI1SIP **VERSION III**  
 surface: SN  
 material thickness: 0,38 mm  
 cross section [mm²]: 4,0 | 6,0  
  
 strip length: 5,50 mm  
 cable type: FLY-B  
 insulation ø [mm]: 3,40 - 4,30  
 seal: DPN 12052387 (4,0)  
 DPN 12052668

**Uncontrolled  
Copy**

**For Information only!**

conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLRY-B	4,0	56 x 0,31	3,55	350	2,10	4,05	6,80	6,75		
FLRY-B	6,0	84 x 0,31	4,15	500	2,40	4,10	6,90	6,75		

core:  
 C-4.00-4.5-19  
 DPN 10713074  
  
insulation:  
 IS-6.30-3.5-19  
 DPN 10713790  
  
anvil:  
 ASR-4.00-6.30-10.3-3.9-1.6  
 DPN 10714018  
  
two piece anvil:

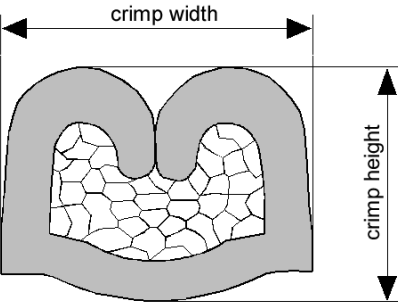


DELPHI PN 12147474



cable:  
4,00 mm<sup>2</sup> = 56 x 0,31 mm

crimp height:  
2,10 mm

crimp width:  
4,05 mm

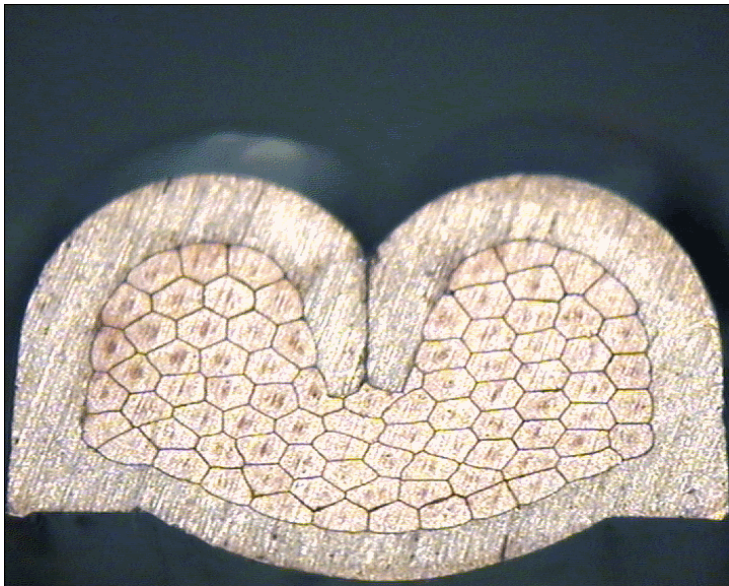

cable:  
6,00 mm<sup>2</sup> = 84 x 0,31 mm

crimp height:  
2,40 mm

crimp width:  
4,10 mm