



Santronics
 1240 Birchwood Drive, Suite 2
 Sunnyvale, CA 94089
 Tel: (408) 734-1878
 Fax: (408) 734-3905


SNX-2458: 200W, 24V Transformer Assembly

DATA SHEET


Mechanical Specifications

(All dimensions in inches, nom unless specified; Not to scale)


Top View

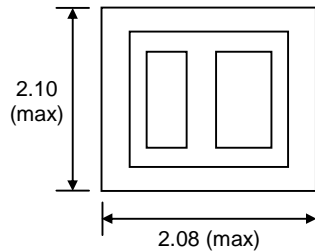


Side Views

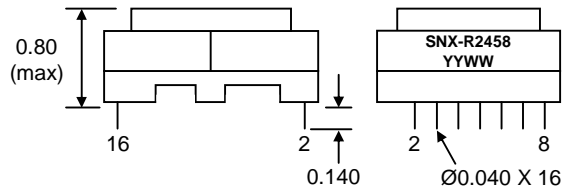

Bottom View

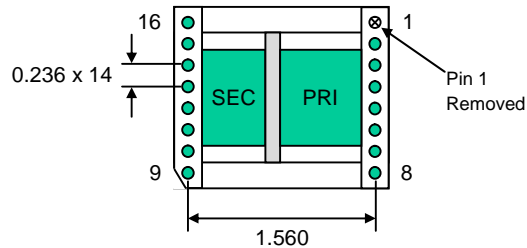

Electrical Specifications

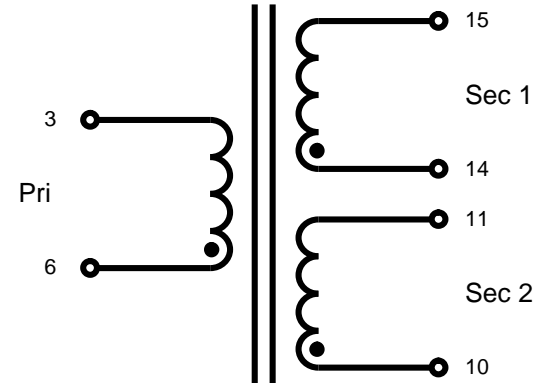

Turns Ratio (Pri):(Sec1):(Sec2)	9 : 1 : 1
Inductance (L) (Pri) @ 100 KHz, 1.0 V	550 uH ± 10%
Leakage L (Pri) @ 100 KHz, 1.0 V	110 uH ± 10%
Dielectric Strength (Pri) to (All Sec)	5000 V ac, 60 s