


# Voltage Controlled Crystal Oscillators

## VC-490/495

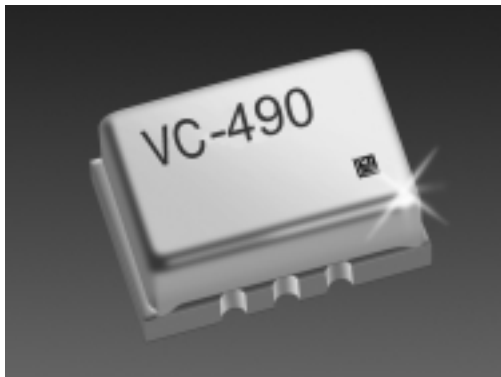

### Description

precision 14 x 9 mm VCXO with high frequency crystal, standard footprint.

### Features

- Small SMD HFF VCXO
- 50.0MHz to 170MHz
- 3.3V supply voltage
- -20 to +70°C / -40 to 85°C
- LVPECL / HCMOS output
- Complementary outputs available


### Performance Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Units
Frequency:	$f_o$	50.0		170.0	MHz
Supply Voltage:	VCC	3.135	3.3	3.465	V
Output option A LVHCMOS: option F compl. LVPECL:	$I_{cc}$ $I_{cc}$		20.0 50.0	40.0 70.0	mA mA
Output option A option F:		LVHCMOS complementary. LVPECL			
Output load option A: option F:		1 kOhm // 15pF 50 Ohm			
Rise/Fall Time tr/TF: option A: option F:	$t_r / t_f$ $t_r / t_f$			3.0 1.0	ns ns
Symmetry (Duty/Cycle):	SYM	40		60	%
Temp. stab. <b>D - 205</b> -20 to +70°C: <b>F - 305</b> -40 to +85°C:	$F_{TEMP}$ $F_{TEMP}$	-20.0 -30.0		+20.0 +30.0	ppm ppm
Accuracy @ +25C after reflow:	FCAL	-15.0		+15.0	ppm
Aging first year: Aging per year thereafter:	$F_{FIRST}$ $F_{AGING}$	-3.0 -2.0		+3.0 +2.0	ppm ppm
Freq. vs. supply for ±5% change:	$F_{SUP}$	-3.0		+3.0	ppm
Freq. vs. load for ±10% change:	$F_{LOAD}$	-1.0		+1.0	ppm
Deviation:	$F_{PULL}$	±100			ppm
Control voltage:	$V_c$	0.3		3.0	V
Transfer Function:		positive			
Linearity:	Lin			±10	%
Storage Temperature:	TS	-45		+95	°C
Package Size:		13.8 x 9.1 x 5.5 mm			


# Voltage Controlled Crystal Oscillators

## VC-490/495

### Option A outline drawing/pad layout

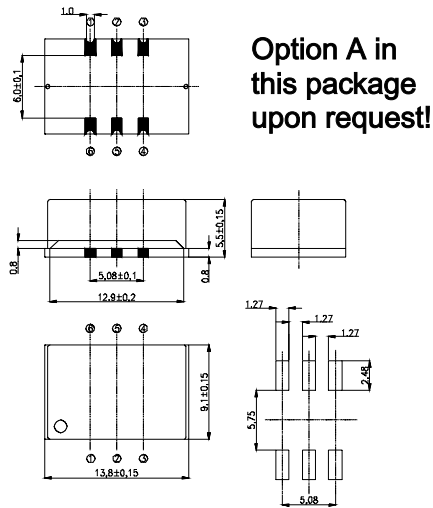

### Option F outline drawing/pad layout

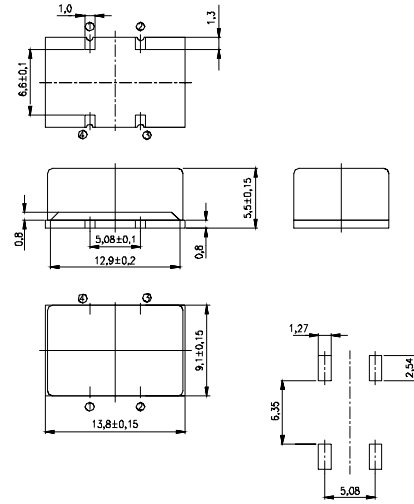

VCXO

### Pin Out Information, VC-490

Pin	Function
1	Control Voltage
2	N.C. (Output Enable/Disable)
3	GND, Case
4	RF Output
5	Complementary RF-output
6	Supply Voltage

### Pin Out Information, VC-495

Pin	Function
1	Control Voltage
2	GND, Case
3	RF Output
4	Supply voltage

### Standard Frequencies

61.44MHz	77.76MHz	125.0MHz	155.52MHz	166.6286MHz	167.331645MHz
----------	----------	----------	-----------	-------------	---------------

### Ordering Information

