


## BNC 50 Ohm Cable Plugs

### Description

BNC 50 Ohm Cable Plug Long Crimp Straight

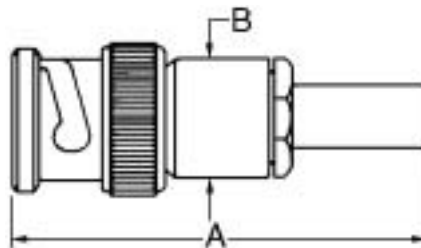


### Ordering Data

BNC 50 Ohm Cable Plug Long Crimp Straight

Part Number	Cable RG-/U	Crimp Tool Hex		Dimension				Finish	Assembly Instructions
				A		B			
		mm	in.	mm	in.	mm	in.		
28P106-1	58, 141	5.41	0.213	38.10	1.500	11.11	0.438	Silver	AI-37
28P106-2	59, 62, 140	6.48	0.255	38.10	1.500	11.11	0.438	Silver	AI-37
28P106-3	55, 142, 223	5.41	0.213	38.10	1.500	11.11	0.438	Silver	AI-37
28P106-5	122, 180, 195	4.52	0.178	38.10	1.500	11.11	0.438	Silver	AI-37
28P106-7	178, 196	2.67	0.105	38.10	1.500	11.11	0.438	Nickel	AI-37
28P106-11	174, 179, 316	3.25	0.128	38.10	1.500	11.11	0.438	Silver	AI-37

### Description

BNC 50 Ohm Cable Plug Long Crimp Right-Angle

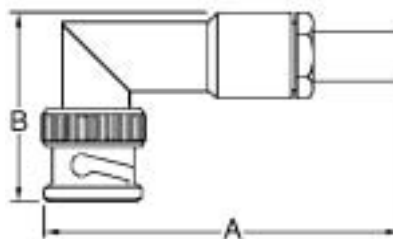

### Ordering Data

BNC 50 Ohm Cable Plug Long Crimp Right-Angle

Part Number	Cable RG-/U	Crimp Tool Hex		Dimension				Finish	Assembly Instructions
				A		B			
		mm	in.	mm	in.	mm	in.		
28P149-1	58, 141	5.41	0.213	46.83	1.844	27.78	1.094	Silver	AI-37
28P149-2	59, 62, 140	6.48	0.255	46.84	1.844	27.79	1.094	Silver	AI-37
28P149-3	55, 142, 223	5.41	0.213	46.84	1.844	27.79	1.094	Silver	AI-37
28P149-5	122, 180, 195	4.52	0.178	46.84	1.844	27.79	1.094	Silver	AI-37
28P149-7	178, 196	2.67	0.105	46.84	1.844	27.79	1.094	Nickel	AI-37
28P149-10	174, 179, 316	3.25	0.128	46.84	1.844	27.79	1.094	Silver	AI-37