


- Series 170, 173 DIL Headers are equipped with turret heads for wiring applications.
- Terminations are pluggable .020" diameter solder tails (M-M# 0700) see page 174 for details; or 3-level wrapposts (M-M# 0730) see page 185 for details.

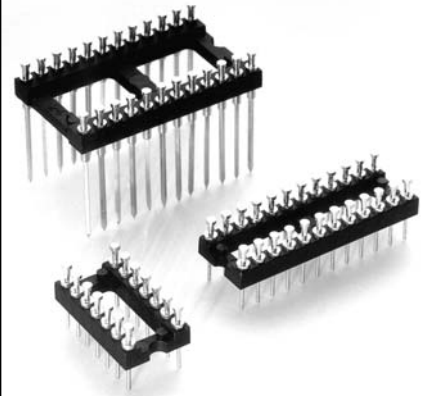

Total number of pins				Quantity per tube	Ordering Information		
	A	B	C		Solder Tail	3 Level Wrapost	
	10	0.5	0.2		0.3	41	170-XX-210-00-001
4	0.2	0.3	0.4	102	170-XX-304-00-001	173-XX-304-00-001	
6	0.3	0.3	0.4	67	170-XX-306-00-001	173-XX-306-00-001	
8	0.4	0.3	0.4	50	170-XX-308-00-001	173-XX-308-00-001	
10	0.5	0.3	0.4	40	170-XX-310-00-001	173-XX-310-00-001	
14	0.7	0.3	0.4	28	170-XX-314-00-001	173-XX-314-00-001	
16	0.8	0.3	0.4	25	170-XX-316-00-001	173-XX-316-00-001	
18	0.9	0.3	0.4	22	170-XX-318-00-001	173-XX-318-00-001	
20	1.0	0.3	0.4	20	170-XX-320-00-001	173-XX-320-00-001	
22	1.1	0.3	0.4	18	170-XX-322-00-001	173-XX-322-00-001	
24	1.2	0.3	0.4	16	170-XX-324-00-001	173-XX-324-00-001	
28	1.4	0.3	0.4	14	170-XX-328-00-001	173-XX-328-00-001	
20	1.0	0.4	0.5	20	170-XX-420-00-001	173-XX-420-00-001	
22	1.1	0.4	0.5	18	170-XX-422-00-001	173-XX-422-00-001	
24	1.2	0.4	0.5	16	170-XX-424-00-001	173-XX-424-00-001	
28	1.4	0.4	0.5	14	170-XX-428-00-001	173-XX-428-00-001	
32	1.6	0.4	0.5	12	170-XX-432-00-001	173-XX-432-00-001	
24	1.2	0.6	0.7	16	170-XX-624-00-001	173-XX-624-00-001	
28	1.4	0.6	0.7	14	170-XX-628-00-001	173-XX-628-00-001	
32	1.6	0.6	0.7	12	170-XX-632-00-001	173-XX-632-00-001	
36	1.8	0.6	0.7	11	170-XX-636-00-001	173-XX-636-00-001	
40	2.0	0.6	0.7	10	170-XX-640-00-001	173-XX-640-00-001	
42	2.1	0.6	0.7	9	170-XX-642-00-001	173-XX-642-00-001	
48	2.4	0.6	0.7	8	170-XX-648-00-001	173-XX-648-00-001	
50	2.5	0.6	0.7	8	170-XX-650-00-001	173-XX-650-00-001	
52	2.6	0.6	0.7	7	170-XX-652-00-001	173-XX-652-00-001	
50	2.5	0.9	1.0	8	170-XX-950-00-001	173-XX-950-00-001	
52	2.6	0.9	1.0	7	170-XX-952-00-001	173-XX-952-00-001	
64	3.2	0.9	1.0	6	170-XX-964-00-001	173-XX-964-00-001	
SPECIFY PLATING CODE XX=					10	90	
Pin Plating					10μ" Au	200μ" Sn/Pb	

**XX= Plating Code  
See Below**

**For High  
Temperature  
Insulators  
Add '100'  
To End Of  
Part Numbers**