


**Description**  
BNC 50 Ohm Cable Jack - Straight Cut Right-Angle




**Ordering Data**  
BNC 50 Ohm Cable Jack - Straight Cut Right-Angle

Part Number	Cable RG-/U	Dimension						Finish	Assembly Instructions
		A		B		C			
		mm	in.	mm	in.	mm	in.		
28J128-1	58	42.07	1.656	21.83	0.859	12.70	0.500	Silver	AI-12

**BNC 50 Ohm Receptacles**


**Description**  
BNC 50 Ohm Receptacle Plug - Single Hole Mount Solder Straight

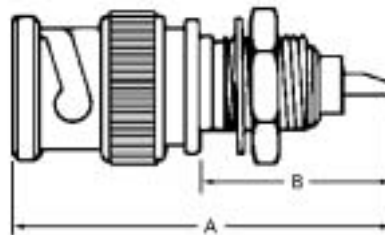

**Ordering Data**  
BNC 50 Ohm Receptacle Plug - Single Hole Mount Solder Straight

Part Number	Mounting Hole	Dimension				Finish
		A		B		
		mm	in.	mm	in.	
28PR107-1	D8	31.75	1.250	15.08	0.594	Silver
28PR123-1	D4	31.75	1.250	14.29	0.563	Silver

**Description**  
BNC 50 Ohm Receptacle Plug - Flange Mount Solder Straight



**Ordering Data**  
BNC 50 Ohm Receptacle Plug - Flange Mount Solder Straight

Part Number	Mounting Plate	Dimension				Finish
		A		B		
		mm	in.	mm	in.	
28PR103-2	2B	30.16	1.188	21.43	0.844	Silver
28PR105-1	1A	30.18	1.188	21.44	0.844	Silver