


16.0-36.0 GHz Up-Converter QFN, 4x4mm

December 2007 - Rev 18-Dec-07




Features

- ✕ Integrated Balanced Mixer, LO Buffer and LO Doubler
- ✕ +23.0 dBm Input Third Order Intercept (IIP3)
- ✕ +2.0 dBm LO Drive Level
- ✕ 4x4mm QFN Package
- ✕ 100% RF and DC Testing

General Description

Mimix Broadband's 16.0-36.0 GHz GaAs packaged up-converter has an input third order intercept point of +22.0 dBm and 10.0 dB of conversion loss. The device consists of a balanced resistive pHEMT mixer, LO buffer amplifier and LO doubler packaged in an industry standard, fully molded 4x4mm QFN package. The device includes on-chip ESD protection structures and DC by-pass capacitors to ease the implementation and volume assembly of the packaged part. This device is well suited for Millimeter-wave Point-to-Point Radio, LMDS, SATCOM and VSAT applications.

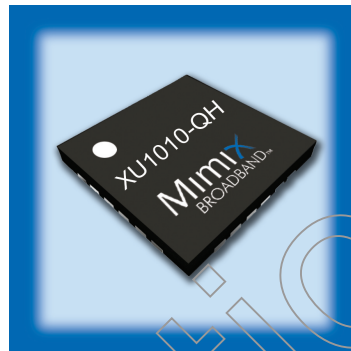

Absolute Maximum Ratings

Parameter	Units	Min.	Max.
Drain Voltage Supply (Vdd)	V	-	6
Drain Current (Ids)	mA	-	350
Input Power (Pin) IF	dBm	-	5
Input Power (Pin) LO	dBm	-	10
Storage Temperature (Tstg)	°C	-55	+150
Operating Backside Temperature (Tb)	°C	-45	+85
ESD –Machine Model (ESD_MM)	V	50	-
ESD –Human Body Model (ESD_HBM)	V	200	-
MSL Level (MSL)		MSL2	

Electrical Characteristics (Ambient Temperature T = 25 °C)

Parameter	Units	Min.	Typ.	Max.
Frequency Range (RF/LO)	GHz	16		36
Frequency Range (IF)	GHz	DC		3.5
Conversion Loss (CL)	dB		10	
Input Third Order Intercept (IIP3)	dBm		23	
LO Input Drive	dBm		2	
RF Input Return Loss	dB		15	
LO Input Return Loss	dB		15	
IF Input Return Loss	dB		15	
2xLO Leakage at RF	dBm		-20	
1xLO Leakage at RF	dBm		-30	
Drain Bias Voltage (Vd1,2)	VDC		5	
Gate Bias Voltage (Vg1)	VDC		-0.2	
Gate Bias Voltage (Vg2,3)	VDC		-0.8	
Gate Bias Voltage (Vss)	VDC		-2	
Supply Current (Id1)	mA		140	
Supply Current (Id2)	mA		80	
Supply Current (Iss)	mA		50	

Mimix Broadband, Inc., 10795 Rockley Rd., Houston, Texas 77099
Tel: 281.988.4600 Fax: 281.988.4615 mimixbroadband.com

Page 1 of 1

Characteristic Data and Specifications are subject to change without notice. ©2007 Mimix Broadband, Inc.
Export of this item may require appropriate export licensing from the U.S. Government. In purchasing these parts, U.S. Domestic customers accept their obligation to be compliant with U.S. Export Laws.