

N3200BA-L400	N Plug Clamp	50Ω
Parts	Material	Plating(Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Braid Clamp	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Center Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Weight: 52.51 g Suitable Cables: LMR400, JBY400		

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3200BA-L400

JYE BAO CO., LTD.

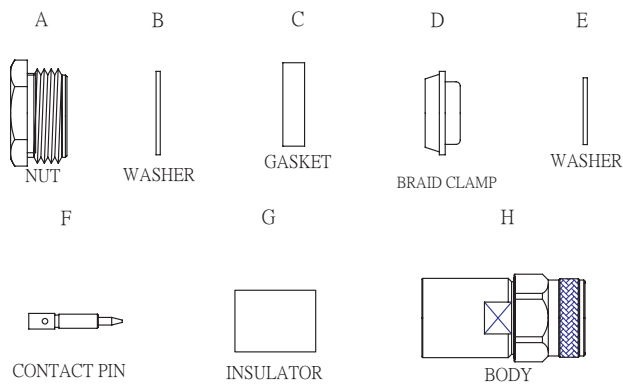


DIAGRAM	ASSEMBLY INSTRUCTION
	<p>Step 1: STRIP AS SHOWN.</p>
	<p>Step 2: SLIDE "A" "B" "C" "D" OVER CABLE.</p>
	<p>Step 3: WRAP THE BRAIDING OVER "D". Step 4: STRIP THE DIELECTRIC AS SHOWN.</p>
	<p>Step 5: PUT PIN " F " IN PLACE AND SOLDER IT TO THE CENTER CONDUCTOR. Step 6: SLIDE "E" IN PLACE.</p>
	<p>Step 7: SLIDE TEFLON "G" INTO CONNECTOR BODY "H". Step 8: FINALLY SCREW "A" ON THE CONNECTOR BODY "H".</p>

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.