



2 N-Kabelstecker Crimp


N Straight Plug Crimp

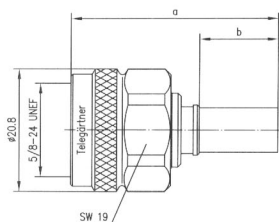

A

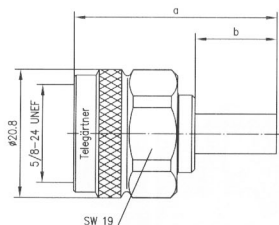


B




Bestell-Nr. Order Nr.	Abb. Fig.	Kabelgruppe; Kabel Cable group; cable	Montage Assembly	Anmerkungen Remarks	Abmessungen Dimensions	Crimpeinsatz Crimp die
J01020A0132	A	K 07252 D-01; RG-393/U	B3426	crimp/crimp	a=36.5, b=14.5	N01001A0030
J01020A0108	B	G1 (RG-58C/U)	B3305	crimp/crimp	a=32.5, b=13	N01001A0005
J01020A0131	A	9880 Belden	B3412	crimp/crimp	a=36.5, b=14.5	N01001D1274
J01020A0110	A	RG-214/U	B3412	crimp/crimp	a=36.5, b=14.5	N01001D1274
J01020A0107	A	RG-213/U	B3412	crimp/crimp	a=36.5, b=14.5	N01001D1274
J01020A0127	A	G37 (2.7/7.25)	B3426	crimp/crimp	a=36.5, b=14.5	N01001A0030
J01020A0119	A	G30 (1.5/3.8); H 155 Pope	B3306	crimp/crimp	a=34.2, b=13	N01001A0007
J01020A0133	A	G42 (2.7/7.1); AA-5886	B3426	crimp/crimp	a=36.6, b=14.5	N01001A0030
J01020A0103	B	G7 (RG-316/U)	B3116	crimp/crimp	a=27.5, b=9.5	N01001A0009
J01020A0104	B	G8 (RD-316)	B3120	crimp/crimp	a=27.5, b=9.5	N01001A0014
J01020A0113	B	G5 (RG-223/U)	B3305	crimp/crimp	a=32.5, b=13.5	N01001A0005

3 N-Kabelwinkelstecker

N Angle Plug

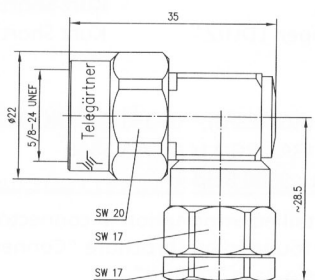

A

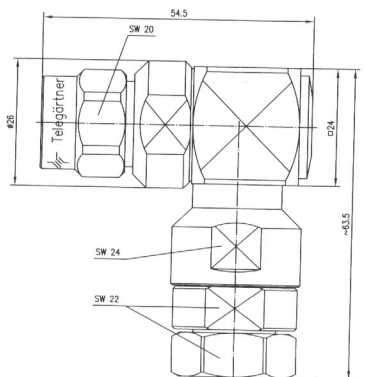

B



