



Description

- Voltage Controlled Crystal Oscillator (VCXO) in a 14-pin DIL hermetically sealed package
- Model IQVCXO-161
- Model Issue number 10

Frequency Parameters

- Frequency 12.0MHz
- Frequency Stability $\pm 50.00\text{ppm}$
- Operating Temperature Range 0.00 to 70.00°C
- Modulation Bandwidth: >15kHz

Electrical Parameters

- Supply Voltage 5.0V $\pm 0.25\text{V}$
- Current Draw 15.00mA

Frequency Adjustment

- Pulling $\pm 100\text{ppm min}$
- Control Voltage 2.5V $\pm 2.0\text{V}$

Output Details

- Output Compatibility HCMOS/LSTTL
- Drive Capability 15pF/10LSTTL
- Rise and Fall Time 10.0ns max
- Duty Cycle 40/60%

Environmental Parameters

- Storage Temperature Range: -40 to 85°C
- Shock: 981m/s², 6ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: 0.76mm amplitude, 10Hz-55Hz, sweep 1min in 3 mutually perpendicular planes, duration 2hrs each plane
- Solderability: MIL-STD-202E, Method 208C
- Rapid Change of Temperature over Operating Temperature Range: 10 cycles
- Terminal Strength: 0.91kg max. force perpendicular to top and bottom
- Hermetic Seal: Not to exceed 1x10⁻⁸mBar litres of Helium leakage


Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
- Pack Size: 25
- *Alternative packing option available*


Outline (mm)

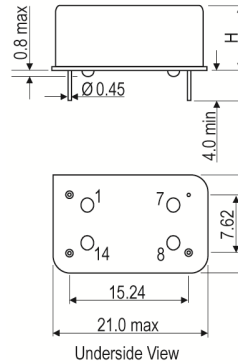

Pin Connections
 1. Voltage Control
 7. GND
 8. Output
 14. +Vs

Frequency Range	Height (H)
1.0 to < 30.0MHz	5.1 max
30.0 to 90.0MHz	8.0 max

Test Circuit

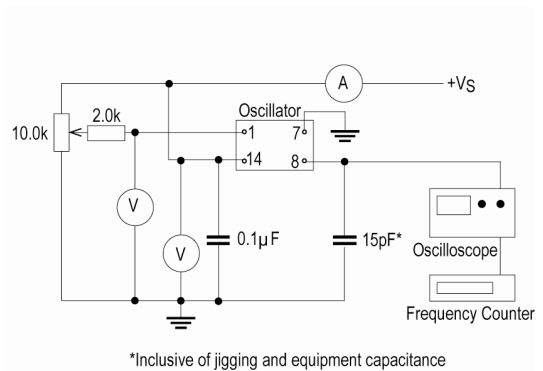


Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com

Typical Voltage Control Curve @ 25°C & 20.0MHz

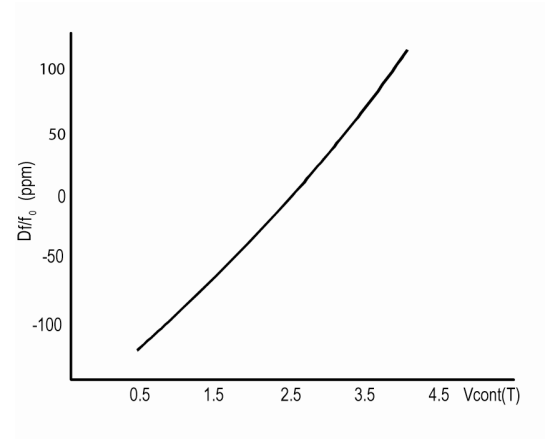

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com