


TABLE 1																																																					
P2 CONN TYPE	A DIM △	FIG NO	P1 CONN TYPE																																																		
			BJ77 /8\							BJ77TL							BJ77FL							BJ377							BJ77RG (REVERCE GENDER) /8\							BJ377RG (REVERCE GENDER) /8\															
			SCHEMATICS																																																		
			DASH NO																																																		
			E1	E2	E3	E4	E5	E6	E7	E1	E2	E3	E4	E5	E6	E7	E1	E2	E3	E4	E5	E6	E1	E2	E3	E4	E5	E6	E1	E2	E3	E4	E5	E6	E1	E2	E3	E4	E5	E6	E1	E2	E3	E4	E5	E6							
CJ20	1.844	1	-1	-4	-7	-19	-25	-181		-41	-49	-57	-65	-73	-196	-81	-89	-97	-105	-113	-121	-129	-137	-145	-153	-226																											
UCJ20			-01	-04	-07	-019	-025	-182		-041	-049	-057	-065	-073	-197	-081	-089	-097	-105	-113	-121	-129	-137	-145	-153	-227																											
PL20			-2	-5	-8	-20	-26	-183	-265	-42	-50	-58	-66	-74	-198	-62	-90	-98	-106	-114	-123	-122	-130	-138	-146	-154	-228	-241	-243	-245	-247	-249	-251	-253	-255	-257	-259	-261	-263														
UPL20	1.778	2	-02	-05	-08	-020	-026	-184		-042	-050	-058	-066	-074	-199	-082	-090	-098	-106	-114	-122	-130	-138	-146	-154	-229	-242	-244	-246	-248	-250	-252	-254	-256	-258	-260	-262	-264															
BJ29			-3	-6	-9	-21	-27	-185		-43	-51	-59	-67	-75	-200	-83	-91	-99	-107	-115	-123	-131	-139	-147	-155	-230																											
UBJ29	1.847	3	-03	-06	-09	-021	-027	-186		-043	-051	-059	-067	-075	-201	-083	-091	-099	-107	-115	-123	-131	-139	-147	-155	-231																											
CJ40			-10	-13	-16	-22	-28	-187		-44	-52	-60	-68	-76	-202	-84	-92	-100	-108	-116	-124	-132	-140	-148	-156	-232																											
UCJ40	1.844	1A	-010	-013	-016	-022	-028	-188		-044	-052	-060	-068	-076	-203	-084	-092	-100	-108	-116	-124	-132	-140	-148	-156	-233																											
PL40			-11	-14	-17	-23	-29	-189		-45	-53	-61	-69	-77	-204	-85	-93	-101	-109	-117	-125	-133	-141	-149	-157	-234																											
UPL40	1.778	2A	-011	-014	-017	-023	-029	-190		-045	-053	-061	-069	-077	-205	-085	-093	-101	-109	-117	-125	-133	-141	-149	-157	-235																											
BJ49			-12	-15	-18	-24	-30	-191		-46	-54	-62	-70	-78	-206	-86	-94	-102	-110	-118	-126	-134	-142	-150	-158	-236																											
UBJ49	1.847	3A	-012	-015	-018	-024	-030	-192		-046	-054	-062	-070	-078	-207	-086	-094	-102	-110	-118	-126	-134	-142	-150	-158	-237																											
PL40P			-31	-32	-33	-34	-35	-193		-47	-55	-63	-71	-79	-208	-87	-95	-103	-111	-119	-127	-135	-143	-151	-159	-238																											
UPL123	1.778	2A	-36	-37	-38	-39	-40	-194		-48	-56	-64	-72	-80	-209	-88	-96	-104	-112	-120	-128	-136	-144	-152	-160	-239																											
UPL123	1.646	4	-161	-162	-163	-164	-165	-195		-166	-167	-168	-169	-170	-210	-171	-172	-173	-174	-175	-225	-176	-177	-178	-179	-180	-240																										
BJ26																																																					
UBJ26																																																					
BJ46																																																					
UBJ46																																																					

SEE 22-09

SEE 22-09

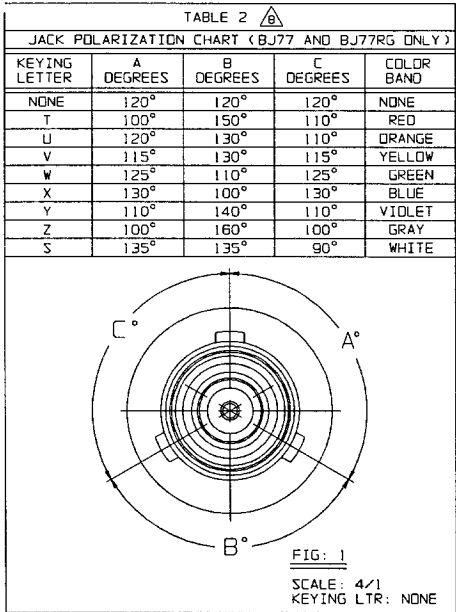

△ POLARIZATION OPTIONAL ONLY ON BJ77 AND BJ77RG, SEE TABLE 2

△ ADD .020 TO "A" DIM FOR ADAPTERS WITH "G" PREFIX

6. EXAMPLE OF COMPLETE PART NO:

PART NO: 22-01-G 1 - X

△ POLARIZATION LETTER CODE

△ DASH NO

5. EXAMPLE OF COMPLETE MODEL NO:

AD - BJ77 RG X - E1 - U CJ20

ADAPTER (P1) CONN TYPE

RG = REVERSE GENDER, OMIT FOR NORMAL GENDER

U = 75 OHM, OMIT FOR 50 OHM

(P2) CONN TYPE (U INDICATES 75 OHM)


△ POLARIZATION LETTER CODE IF REQ'D SEE TABLE 2

4. BETWEEN SERIES ADAPTERS: 2-LUG, 3-LUG, 4-LUG AND THREADED CONCENTRIC TWINAX/TRIAX BNC TYPE TO COAXIAL 50 & 75 OHM BNC/TNC & PUSH-ON PLUG/JACK

△ FOR OPTIONAL GROUND LUG ADD PREFIX "G" TO DASH NO

2. FINISH TFS-1A (NICKEL)





1. ALL DIM ARE IN INCHES

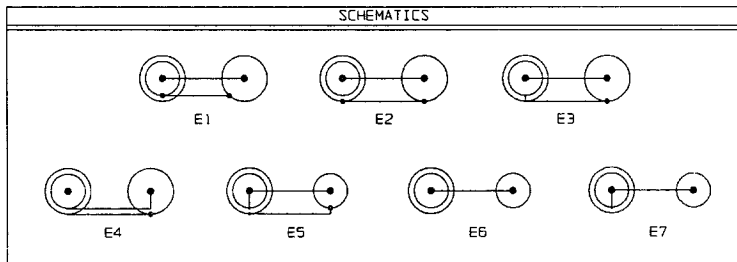

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF TROMPETER ELECTRONICS INC.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
K	REVISED PER ECO 15124	7/23/03	WSB

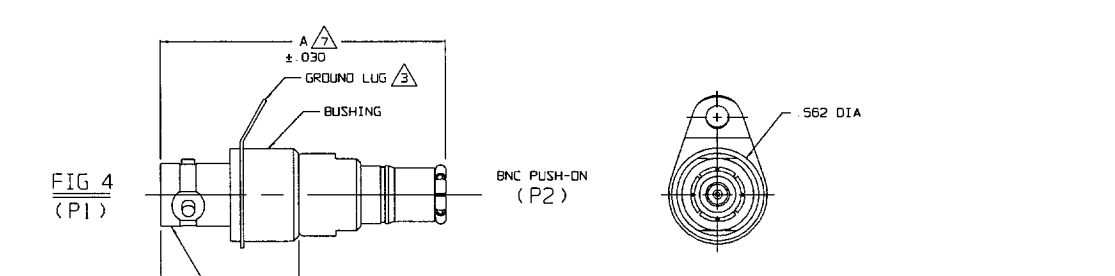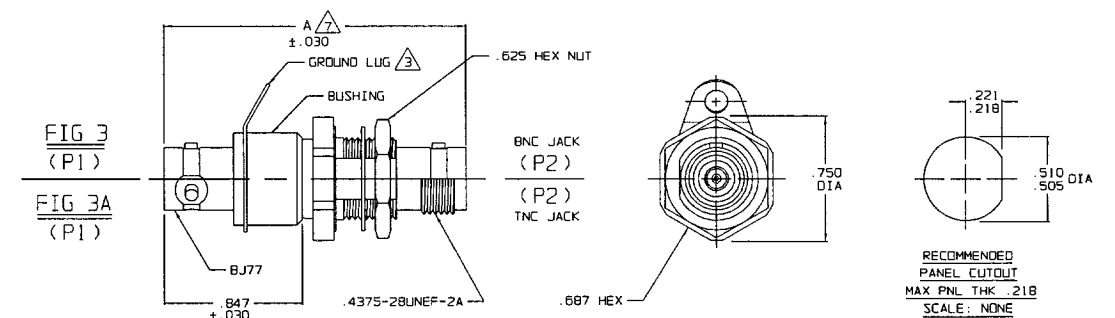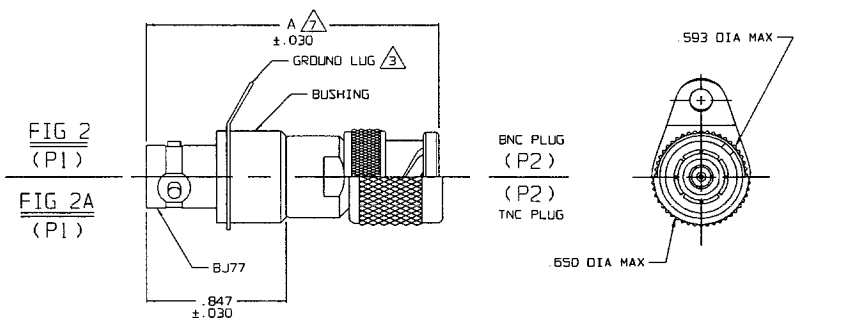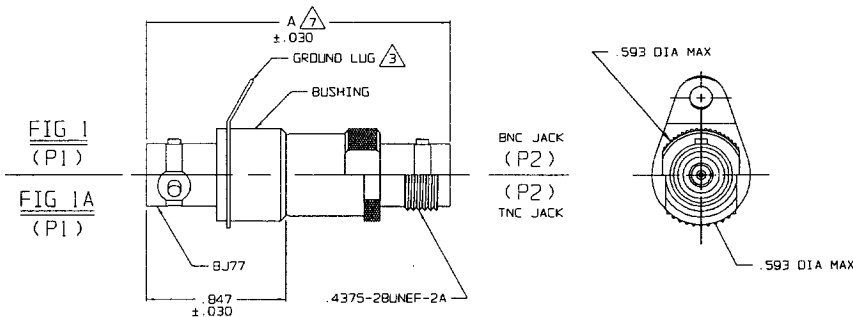

INTERPRET DRAWING PER MIL-STD-100 DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED		TOL: UNLESS SPECIFIED .XX .XXX ±.005 .XXXX ANGLES MATERIAL:		TITLE: ADAPTER: BJ77, BJ77RG/8 BJ77TL, BJ77FL, BJ377 TO BNC/TNC SERIES	
DRAWN AAH	DATE 7-22-03	FINISH: 7/23/03		SIZE B	CAGE CODE 14949
CHECKED	DATE 7-22-03	DATE 7/23/03		DRAWING NO. 22-01	REV. K
QUALITY	DATE 7/23/03	DATE 7/23/03		SCALE NONE	DATE: 2-25-85
MAINT	DATE 7/23/03	DATE 7/23/03		SHEET 1C	
APPROVED	DATE 7/23/03	DATE 7/23/03			
CAD FILE NO. 22-01K	NEXT ASSY		DO NOT SCALE DWG		