

MCX3100-0179	MCX Plug Crimp		75Ω
Parts	Material	Plating (Micro-inch)	
Ferrule	Brass	Gold 5 Over Nickel 50 Over Copper 50	
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50	
Insulator	Teflon		
Body	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50	
Weight: 1.04 g Suitable Cables: RG179, RG179-FEP			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

MCX3100-0179

JYE BAO CO., LTD.

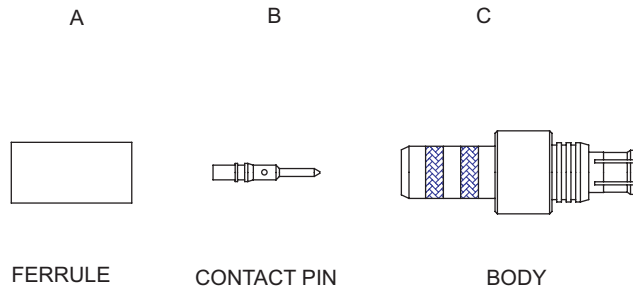
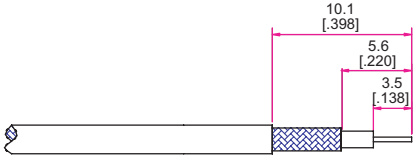
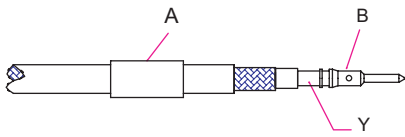

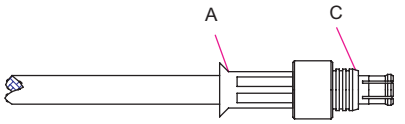


DIAGRAM	ASSEMBLY INSTRUCTION
	<p>Step 1: STRIP AS SHOWN.</p>
	<p>Step 2: SLIDE FERRULE "A" OVER CABLE. Step 3: PUT PIN "B" ON CENTER CONDUCTOR AND CRIMP IN "Y".</p>
	<p>Step 4: LOOSEN BRAIDING AND SLIDE BODY "C" IN PLACE.</p>
	<p>Step 5: SLIDE FERRULE "A" TOWARDS THE CONNECTOR "C" AND CRIMP.</p>

Notice: JYEBAO reserves the right to make modifications deemed appropriate.