DWG. NO. 361-100-0000G

REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER NPR 2375	10/1/5	

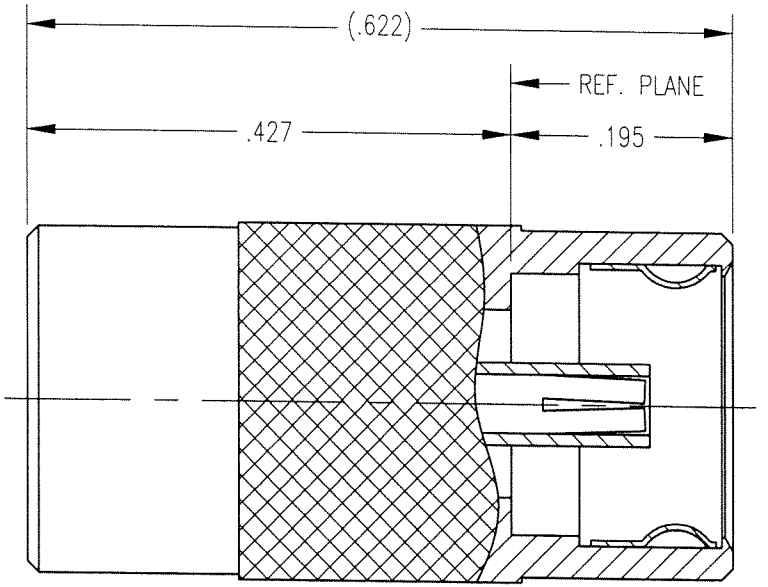

NOTES:

1. MATERIALS:
   - BODY: STAINLESS STEEL PER ASTM A582
   - CENTER CONTACT: COPPER ALLOY
   - OUTER CONTACT: BERYLLIUM COPPER PER ASTM B194
   - ALL OTHER METAL PARTS: BRASS PER ASTM B16
   - INSULATOR: TEFLON PER ASTM D1710
2. FINISH:
   - OUTER AND CENTER CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN. NICKEL PER QQ-N-290
   - BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN. NICKEL PER QQ-N-290
   - CAP: .000005 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN. NICKEL PER QQ-N-290
3. ELECTRICAL:
   - FREQUENCY RANGE: 45 MHz TO 18.0 GHz
   - VSWR: 1.05 + .005f (GHz) MAX.

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMALS xx ± .01/0.254
xxx ± .005/0.127
ANGLES ± 2°
SCALE: 6:1

CUSTOMER DRAWING

DRAWN	DATE	CHECKED	DATE
KJT	02/23/01	JWH	3/16/01
APPROVED	DATE	APPROVED	DATE
JEM	3/16/01	JED	3/16/01

Litton
Winchester/Retconn 400 Park Road Watertown, Connecticut 06795

TITLE
BMA 50 OHM
LOAD JACK

A	361-100-0000G	SHT. 1	OF 1	REV. A

June 2006 - This drawing became the property of Winchester Electronics Corporation, Wallingford, CT.