


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

# GSD

KV-59-23

REVISIONS	
ISSUE	CHANGES
6	CN 35975 C REDRAWN ME 01/13/95

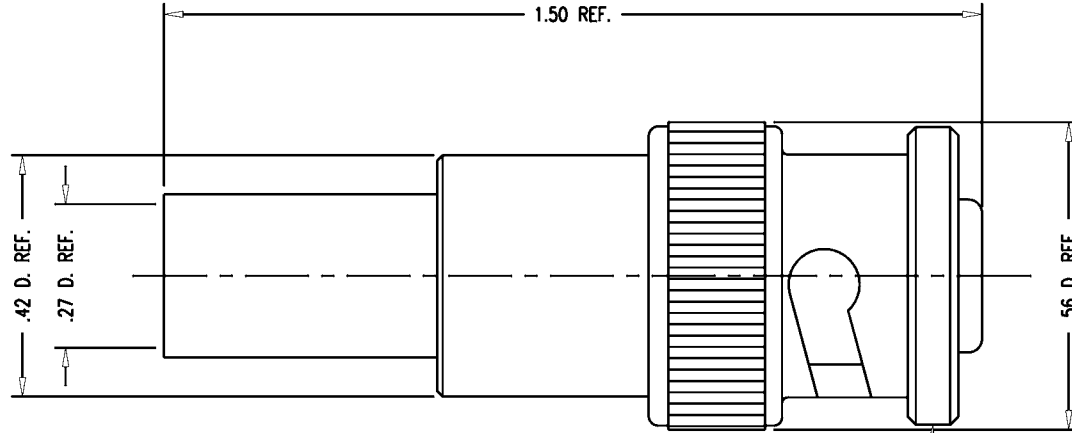

STAMP: KINGS KV-59-23

**NOTES:**

1. FOR USE WITH RG-59, 62, & 210/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-417.
3. FOR CABLE TRIMMING USE KTJ-70 & KTD-36.
4. FOR CRIMPING USE DIE KTH-2002.
5. INTERFACE PER MIL-STD-348, FIG. 303-1.
6. K-GRIP SLEEVE AND CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
7. MATERIALS:  
 INSULATOR: TEFLON, ASTM-D-1457  
 GASKET: SIL. RUB., ZZ-R-765  
 SPRING WASHER: BER. COP., ASTM-B-196  
 ALL OTHER PARTS: BRASS, QQ-B-626
8. FINISHES:  
 CENTER CONTACT: SILVER PLT. PER QQ-S-365  
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:  
 VOLTAGE RATING: 3500 VRMS  
 INSULATION RESISTANCE: 5000 MEGOHMS

QGS0061

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, MHV	
DRAWN ME	DATE 01/13/95
DESIGN LI	DATE 01/23/95
APPR.	DATE

# GSD

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

KV-59-23