



Right-Angle Plugs, Crimp

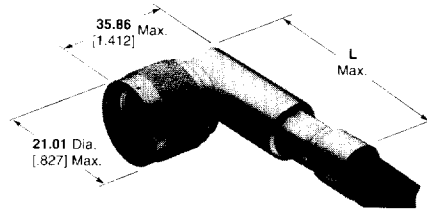

RG/U Cable	Termination Type	Body Plating	M39012/ Military No. and/ or Comments	L Dim.	Integral Die Hand Tool	Hex Across Flats		Part Numbers
						Center	Braid	
58A, 58C	Hex Crimp	Nickel	Hex Collar	57.79 2.275	58436-1*	1.73 .068	5.41 .213	415255-1
142, 142A, 142B	Hex Crimp	Nickel	Hex Collar	57.79 2.275	58436-1*	1.73 .068	5.41 .213	415255-2
8, 8A, 213	O Crimp	Nickel	Knurl Collar	57.79 2.275	220015-1	—	—	225669-2
	O Crimp	Silver	05B0002 Knurl Collar	57.79 2.275	220015-1	—	—	225014-2
8, 213	Hex Crimp	Nickel	Hex Collar	57.79 2.275	58485-1*	2.54 .100	10.90 .429	415255-3
393	Hex Crimp	Nickel	Hex Collar	57.79 2.275	58485-1*	2.54 .100	10.90 .429	415255-6
9, 9A, 9B, 214	O Crimp	Nickel	Knurl Collar	57.79 2.275	220015-1	—	—	225669-1
	O Crimp	Silver	05B0003 Knurl Collar	57.79 2.275	220015-1	—	—	225014-3
9, 214	Hex Crimp	Nickel	Hex Collar	57.79 2.275	58485-1*	2.54 .100	10.90 .429	415255-4
Belden 9880	Hex Crimp	Nickel	Hex Collar	57.79 2.275	58485-1*	2.54 .100	10.90 .429	415255-5

*Crimp Tool — PRO-CRIMPER II Hand Tool, P/N 354940-1 or 626 Series Pneumatic Tool with 679304-1.

Jacks, Crimp



RG/U Cable	Termination Type	Body Plating	M39012/ Military No. and/ or Comments	L Dim.	Integral Die Hand Tool	Hex Across Flats		Part Numbers
						Center	Braid	
58A, 58C	Hex Crimp	Nickel	—	41.28 1.625	58436-1**	1.73 .068	5.41 .213	415242-1
142, 142A, 142B, 400	O Crimp	Nickel	—	44.84 1.765	220045-2**	—	—	1-225663-5*
142, 142A, 142B	Hex Crimp	Nickel	—	41.28 1.625	58436-1**	1.73 .068	5.41 .213	415242-2
8, 8A, 213	O Crimp	Silver	02B0008	49.2 1.937	220015-1	—	—	225093-2
8, 213	Hex Crimp	Nickel	—	41.28 1.625	58485-1**	2.54 .100	10.90 .429	415242-3
9, 9A, 9B, 214	O Crimp	Silver	02B0009	49.2 1.937	220015-1	—	—	225093-1
9, 214	Hex Crimp	Nickel	—	41.28 1.625	58485-1**	2.54 .100	10.90 .429	415242-4
Belden 9880	Hex Crimp	Nickel	—	41.28 1.625	58485-1**	2.54 .100	10.90 .429	415242-5
393	Hex Crimp	Nickel	—	41.28 1.05	58485-1**	2.54 .100	10.90 .429	415242-6
402 Semi Rigid (.141)	Solder	Nickel	—	26.7 1.05	—	—	—	1057116-1
405 Semi Rigid (.085)	Solder	Nickel	—	26.7 1.05	—	—	—	1057119-1

*Hand Tool 69710-1, with Die Insert 220062-1, is available to terminate these connectors. The 626 Pneumatic tool system can also be used.

**Die Set Crimp Tool — PRO-CRIMPER II Hand Tool, P/N 354940-1 or 626 Series Pneumatic Tool with 679304-1.

For complete product information, order Catalog 1307191