


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-59-486

REVISIONS	
ISSUE	CHANGES
6	CN 37113 D REDRAWN KH 09/12/96

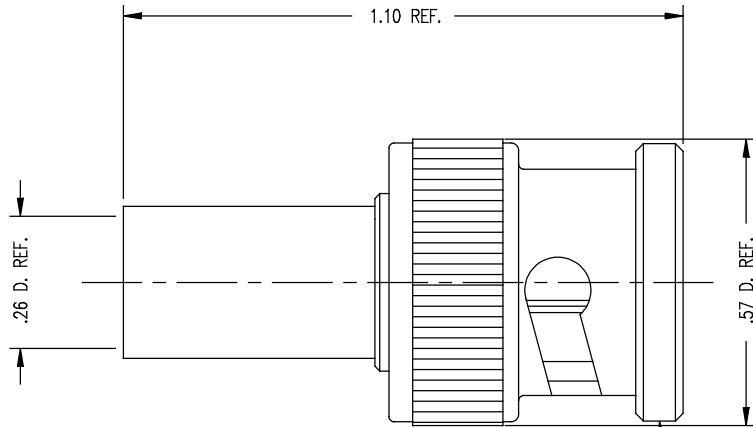

STAMP: KINGS KC-59-486

NOTES:

- FOR USE WITH TIMES FM-59 CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-465.
- FOR CRIMPING USE DIE SIZE KTH-2002.
- MATERIALS:
 - GASKET-SILICONE RUBBER, ZZ-R-765
 - INSULATOR-TEFLON, ASTM-D-4894
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - SPRING WASHER }
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
 - SPRING WASHER-SILVER PLATE PER QQ-S-365
 - CENTER CONTACT-GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRIAL CHARACTERISTICS:
 - WORKING VOLTAGE-500 VRMS
 - FREQUENCY RANGE-DC TO 4 GHZ
 - NOMINAL IMPEDANCE-50 OHMS

KAM6784

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF: HONEYWELL 30732054-001 REV. 8	
BNC PLUG	
DRAWN KH	DATE 09/12/96
DESIGN MJB	DATE 09/13/96
APPR.	DATE
 KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
KC-59-486	

GSD