

2桁LED数字表示素子

2 Digits LED Numeric Displays

Ta=25°C

機種名 Type No.		外觀 結線圖 Drawing No.	色 Color	絶対最大定格 Absolute Maximum Ratings					推奨動作電流 IF/seg Recommend.	電気的光学的特性 Optoelectric Characteristics					波長 Peak Wave Length
Com.-Anode	Com.-Cathode		Red Green	IF/seg mA	IFP/seg mA	VR/seg V	Pd W	Topr °C	mA	VF Typ. V	IF mA	Luminous Typ. μcd	Intensity IF mA	IR Max (VR=3V) μA	nm
SL-1271	SL-1272	L-10	○	20	40	3	0.6	-25~75	5~10	1.9	5	170	5	10	700
SL-2271	SL-2272	L-10	○	20	40	3	0.6	-25~65	10~15	2.05	15	370	15	10	565
SL-1221	SL-1222	L-11	○	20	40	3	0.6	-25~75	5~10	1.9	5	220	5	10	700
SL-2221	SL-2222	L-11	○	20	40	3	0.6	-25~65	10~20	2.05	15	400	15	10	565
	SL-1214T	L-12	○	15	40	3	0.6	-25~65	5~10	1.9	5	210	5	10	700
	SL-2214T	L-12	○	20	45	3	0.6	-25~65	10~20	2.05	15	400	15	10	565
SL-1261-01	SL-1262-01	L-13	○	20	40	3	0.6	-25~70	5~10	1.9	5	220	5	10	700
SL-2261-01	SL-2262-01	L-13	○	20	60	3	0.6	-25~65	10~20	2.05	15	450	15	10	565
SL-1249L	SL-1240L	L-14	○	20	40	3	0.6	-25~70	5~10	1.9	5	750	5	10	700
SL-2249G	SL-2240G	L-14	○	20	50	3	0.6	-25~65	10~20	2.05	15	1500	15	10	565
SL-1263	SL-1264	L-15	○	20	40	3	0.6	-25~70	3~10	1.9	5	300	5	10	700
SL-2263	SL-2264	L-15	○	20	40	3	0.6	-25~70	10~15	2.05	15	2000	15	10	565
SL-1273	SL-1274	L-16	○	20	40	3	0.6	-25~70	3~10	1.9	5	300	5	10	700
SL-2273	SL-2274	L-16	○	20	40	3	0.6	-25~70	10~15	2.05	5	2000	15	10	565
SL-1283	SL-1284	L-17	○	20	40	3	0.6	-25~70	3~10	1.9	5	350	5	10	700
SL-2283	SL-2284	L-17	○	20	40	3	0.6	-25~70	10~15	2.05	15	800	15	10	565

※ Pulse width = 1ms. Duty Ratio $\frac{1}{2}$ $I_{FP}:I_F$ Pulse = Pulsed Forward Current

用途



カウンター表示 (タクシーメーター等)

チャンネル表示 (TVチャンネル等)

APPLICATIONS


Counter indication (Taxi meters, etc.)

Channel indication (TV channels, etc.)

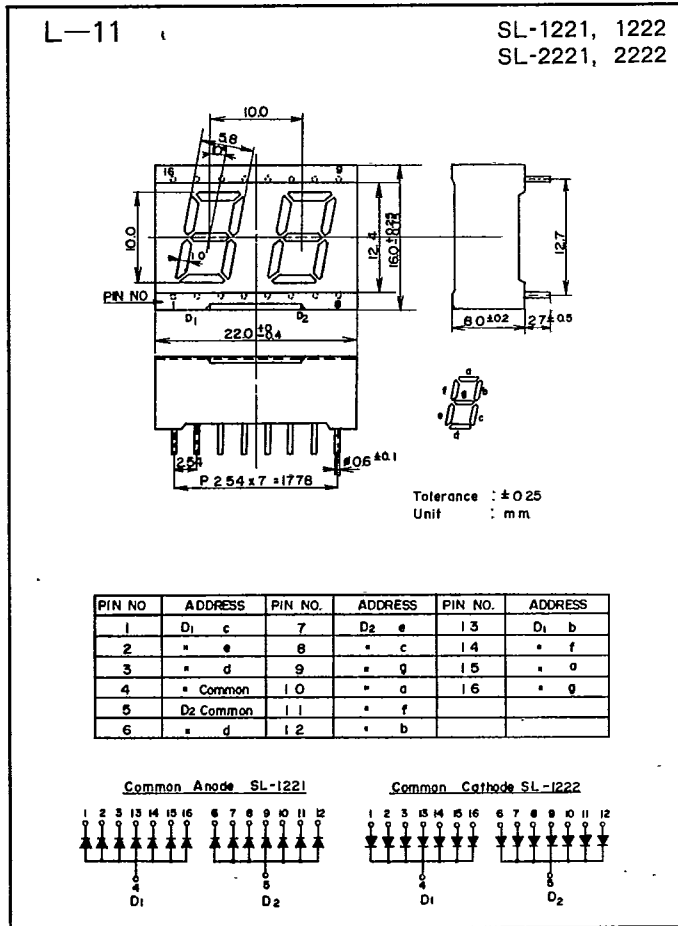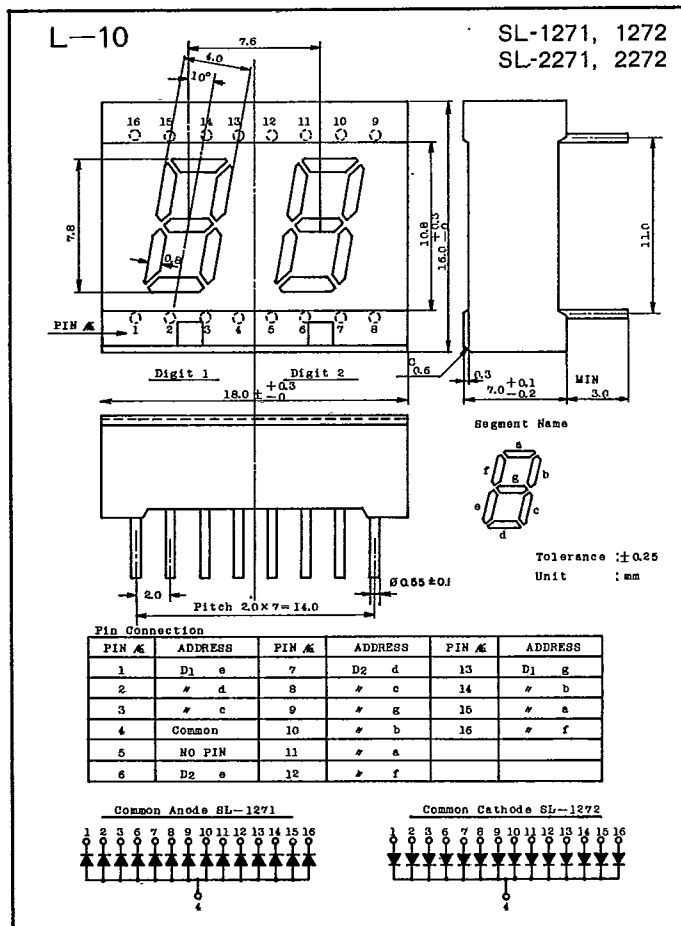


L-16

SL-1273, 1274
SL-2273, 2274

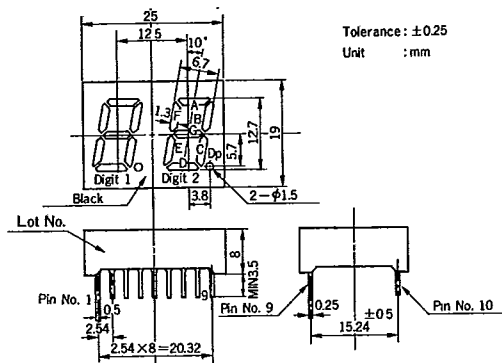


PIN NO.	ADDRESS	PIN NO.	ADDRESS
1	E1	10	B2
2	D1	11	A2
3	C1	12	F2
4	Dp1	13	Digit 2 Common
5	E2	14	Digit 1 Common
6	D2	15	B1
7	G2	16	A1
8	C2	17	G1
9	Dp2	18	F1

Pin Connection Common Anode SL-1273




Common Cathode SL-1274




L-17

SL-1283, 1284
SL-2283, 2284

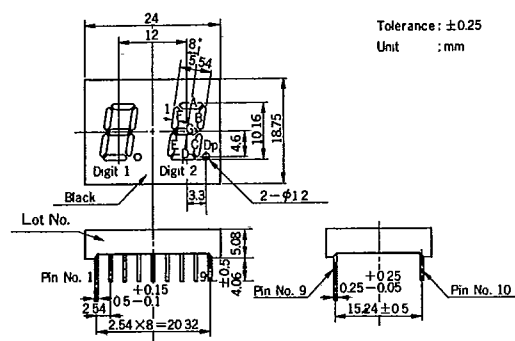

PIN NO.	ADDRESS	PIN NO.	ADDRESS
1	E1	10	B2
2	D1	11	A2
3	C1	12	F2
4	Dp1	13	Digit 2 Common
5	E2	14	Digit 1 Common
6	D2	15	B1
7	G2	16	A1
8	C2	17	G1
9	Dp2	18	F1

Common Anode SL-1283



Common Cathode SL-1284

