


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-931172~1175	2009/01/14	Prune	Update the drawing.
C	LEN1550032-036	2014/12/24	Vicky	Update Logo

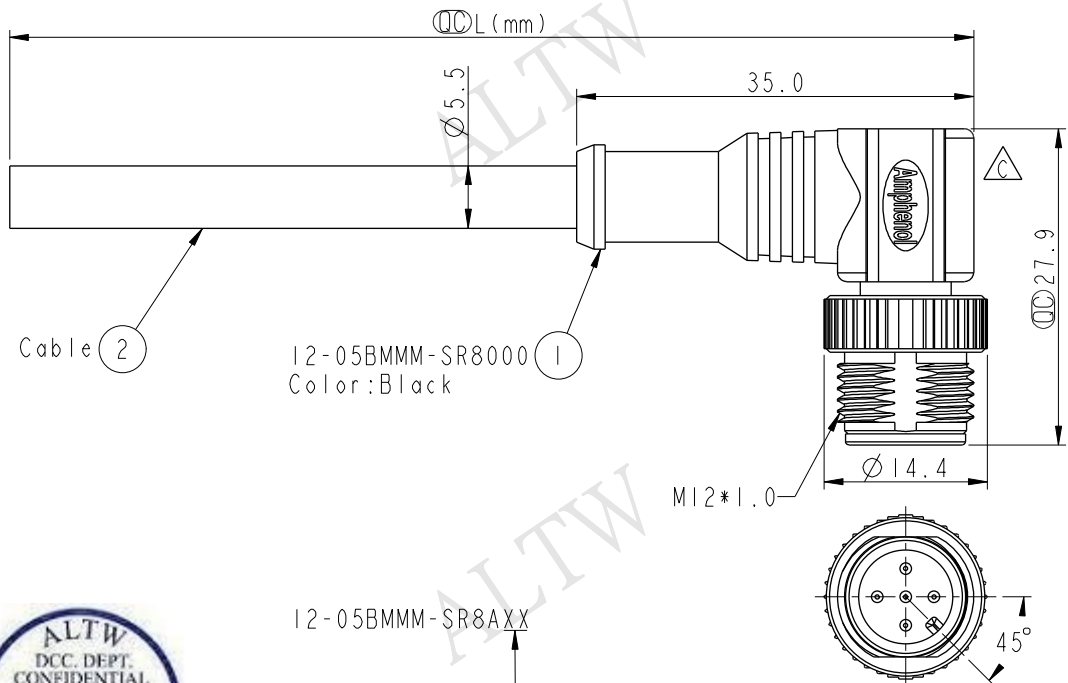

Cable (2)

12-05BMMM-SR8000  
Color:Black

M12\*1.0


12-05BMMM-SR8AXX

XX:01~99Meters  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters  
Cable Length(L):01~99Meters

- Note:
- \*  $\varnothing$  Important Dimension.
  - \* Waterproof Rate: IP68.  
In 1 meter water within 24 hours.
  - \* Connector: PU, Black.
  - \* Male Pin: Copper Alloy, Gold Plated.
  - \* Cable: UL2464 22AWG\*5C+Talcum, Black, PVC Jacket, UV Resistant, OD=5.5mm.
  - \* Cable Length Tolerance:
    - 01M:±40mm
    - 02M~05M:±60mm
    - 06M~10M:±100mm
    - 11M~30M:±200mm
    - 31M~99M:±500mm

ALTW  
CONFIDENTIAL  
2014-12-24  
R&D DEPT.

ALTW  
DCC. DEPT.  
CONFIDENTIAL  
2015.05.18  
ISSUED

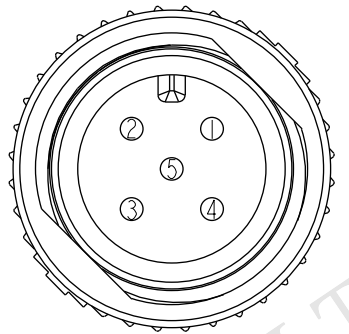

Pin Assignments  
Front View

5	Green	綠
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm		TITLE	M12 Conn
TOLERANCE	±0.5 mm	Cable Screw 5P M Conn M Pin	
SCALE	3:2	SIZE	A4
REV.	C	WC-REV.	A.1
		$\varnothing$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Vicky	2014-12-24
	Sam	2014-12-24
	Rita	2014-12-24

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.