

**Description**  
N 50 Ohm Cable Jack -  
Single Hole Mount Straight Cut Straight


**Ordering Data**  
N 50 Ohm Cable Jack - Single Hole Mount Straight Cut Straight

Part Number	Cable RG-/U	Dimension						Finish	Mtg. Hole	Assembly Instructions <sup>^</sup>	Note
		A		B		C					
		mm	in.	mm	in.	mm	in.				
25JS100-1	8, 11, 213	44.45	1.750	19.05	0.750	23.42	0.922	Silver	DD1	AI-81	
25JS100-2	9, 13, 214	44.45	1.750	19.05	0.750	23.42	0.922	Silver	DD1	AI-81	
25JS103-1	174, 179A, 187, 188	41.67	1.641	12.70	0.500	23.42	0.922	Silver	DD1	AI-102	1
25JS122-1	0.085 S.R.	41.67	1.641	12.70	0.500	23.42	0.922	Nickel	DD1	AI-398	2
25JS124-1	0.141 S.R.	39.69	1.563	12.70	0.500	23.42	0.922	Silver	DD1	AI-21	3
25JS126-1	174, 316	41.67	1.641	12.70	0.500	23.42	0.922	Silver	DD1	AI-159	1
25JS130-2	174, 316	42.86	1.688	12.70	0.500	23.42	0.922	Nickel	DD1	AI-66	
25JS130-4	58	42.86	1.688	12.70	0.500	23.42	0.922	Nickel	DD1	AI-12	
25JS130-6	303	42.86	1.688	12.70	0.500	23.42	0.922	Nickel	DD1	AI-12	
25JS130-7	59, 62	42.86	1.688	12.70	0.500	23.42	0.922	Nickel	DD1	AI-12	

Note 1 - Clamp Cable Termination

Note 2 - Solder-On Bushing Cable Termination

Note 3 - Plug-in/Clamp Cable Termination

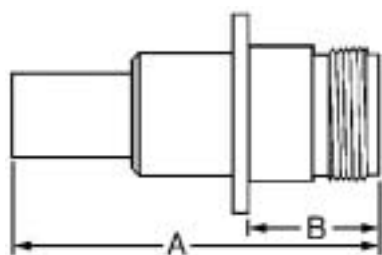

**Description**  
N 50 Ohm Cable Jack -  
Flange Mount Short Crimp Straight

**Ordering Data**  
N 50 Ohm Cable Jack - Flange Mount Short Crimp Straight

Part Number	Cable RG-/U	Crimp Tool Hex	Dimension				Finish	Mtg. Plate	Assembly Instructions	
			A		B					
			mm	in.	mm	in.				
25JF113-1	9, 214	10.90	0.429	41.28	1.625	16.67	0.656	Silver	1A	AI-349
25JF113-2	8, 213	10.90	0.429	41.28	1.625	16.67	0.656	Silver	1A	AI-349