


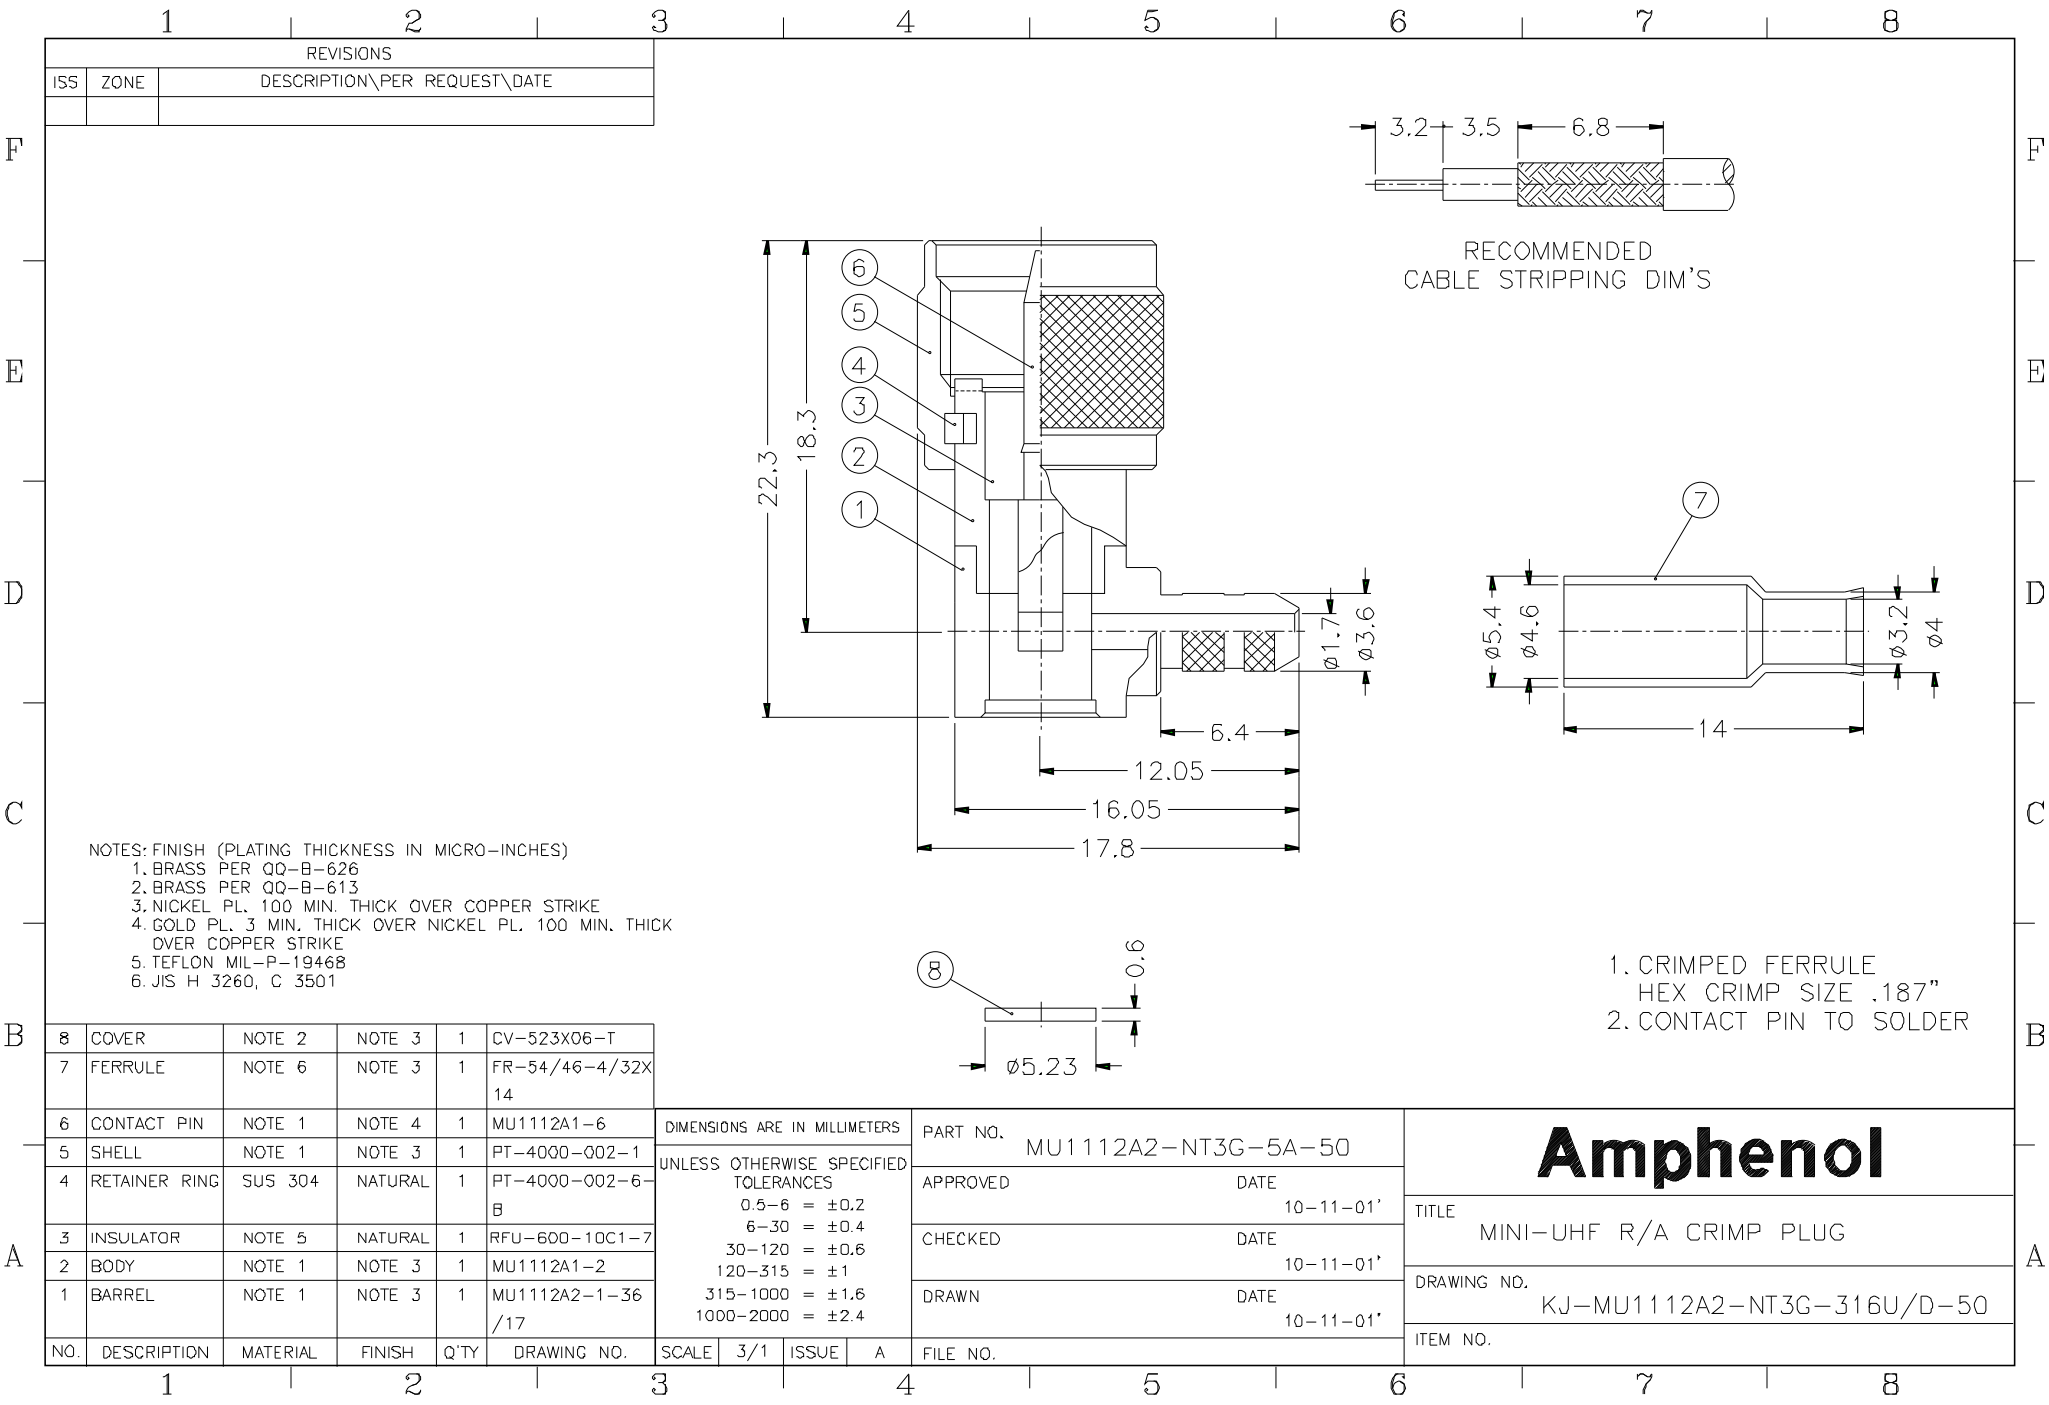

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468
6. JIS H 3260, C 3501

8	COVER	NOTE 2	NOTE 3	1	CV-523X06-T
7	FERRULE	NOTE 6	NOTE 3	1	FR-54/46-4/32X14
6	CONTACT PIN	NOTE 1	NOTE 4	1	MU1112A1-6
5	SHELL	NOTE 1	NOTE 3	1	PT-4000-002-1
4	RETAINER RING	SUS 304	NATURAL	1	PT-4000-002-6-B
3	INSULATOR	NOTE 5	NATURAL	1	RFU-600-10C1-7
2	BODY	NOTE 1	NOTE 3	1	MU1112A1-2
1	BARREL	NOTE 1	NOTE 3	1	MU1112A2-1-36/17

DIMENSIONS ARE IN MILLIMETERS					PART NO.
UNLESS OTHERWISE SPECIFIED TOLERANCES					MU1112A2-NT3G-5A-50
0.5-6 = ±0.2					APPROVED
6-30 = ±0.4					DATE
30-120 = ±0.6					10-11-01'
120-315 = ±1					CHECKED
315-1000 = ±1.6					DATE
1000-2000 = ±2.4					10-11-01'
DRAWN					DATE
10-11-01'					

Amphenol	
TITLE	
MINI-UHF R/A CRIMP PLUG	
DRAWING NO.	
KJ-MU1112A2-NT3G-316U/D-50	
ITEM NO.	

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A	FILE NO.
-----	-------------	----------	--------	------	-------------	-------	-----	-------	---	----------