



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDM-202-006 REV: 1.0

## 2.0" 5\*7 LED Lamp Dot Matrix Displays

MODEL NO : LM-2002WB/SYGC/S400-E1 ECN : \_\_\_\_\_ Page: 1/5

### ■ Features :

- Large emitting dot 0.264"diameter.
- Low power/high brightness.

### ■ Applications:

- Instrument panels
- Digital read out display

### ■ Description :

- The LM-2002 series are a large emitting area(5.0mm diameter)LAMP sources configured in a 35 dots 5\*7 matrix array.
- These device is made with white clear dots and black surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
LM-2002WB/SYGC/S400-E1	AlGaInP	Super Yellow Green	C.A.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936


FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



## 2.0" 5\*7 LED Lamp Dot Matrix Displays

### Package Dimension:

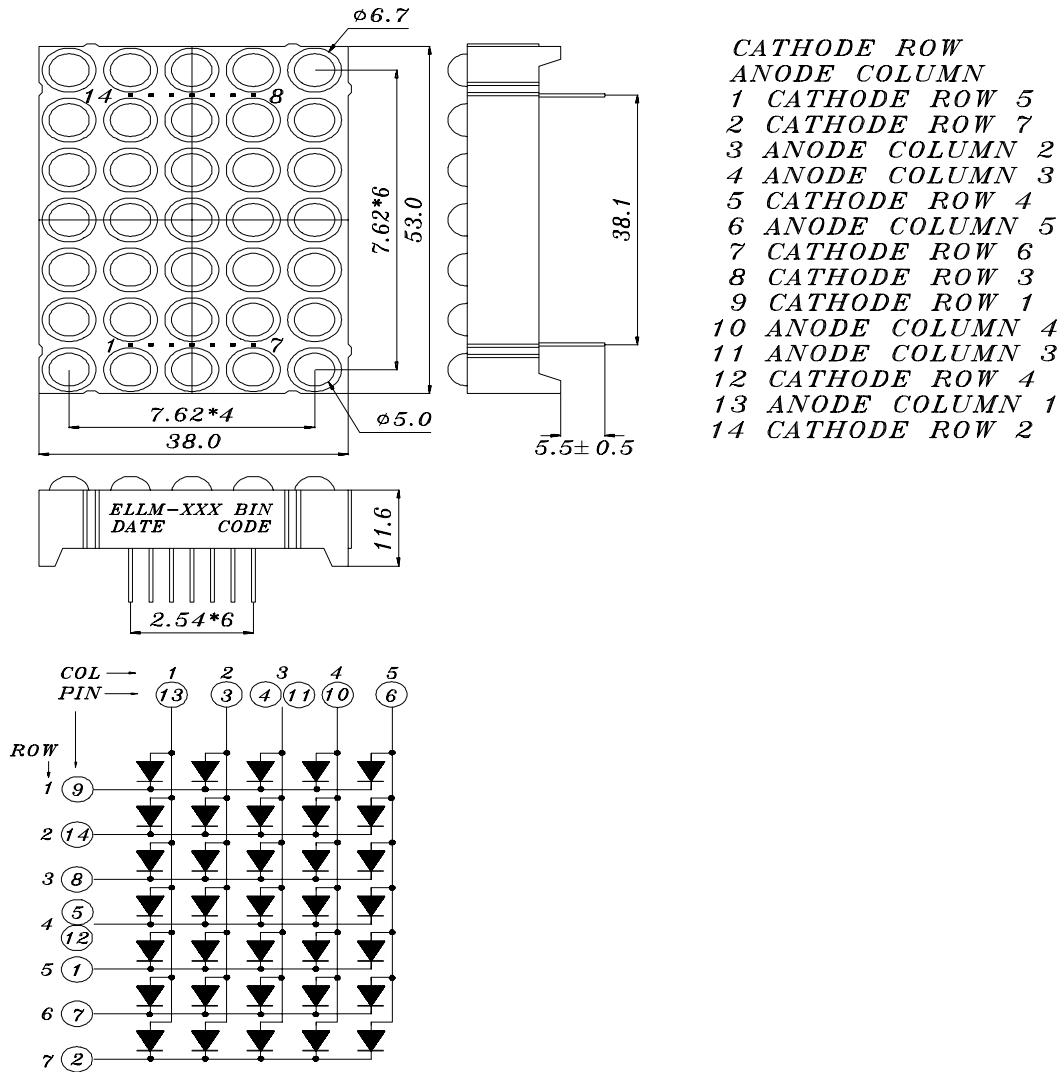

### NOTES:

- 1.All dimensions are millimeters ,tolerance is 0.25mm unless otherwise noted.
  - 2.Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification .



## 2.0" 5\*7 LED Lamp Dot Matrix Displays

### ■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	40	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40to+100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	180	mA

### ■ Electronic optical characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Iv	----	22.8	----	mcd	If=2mA
		250	380			If=10mA
Peak Wavelength	$\lambda_p$	----	575	----	nm	If=20mA
Dominant Wavelength	$\lambda_d$	----	573	----	nm	If=20mA
Spectrum Rediation Bandwidth	$\Delta \lambda$	----	20	----	nm	If=20mA
Forward Voltage	Vf	----	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	V	Vr=5V



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Num DDM-202-006 REV: 1.0

2.0" 5\*7 LED Lamp Dot Matrix Displays

MODEL NO : LM-2002WB/SYGC/S400-E1 ECN : \_\_\_\_\_ Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min } 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min } 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

--	--	--	--	--	--



## 2.0" 5\*7 LED Lamp Dot Matrix Displays

