


**Data Sheet**

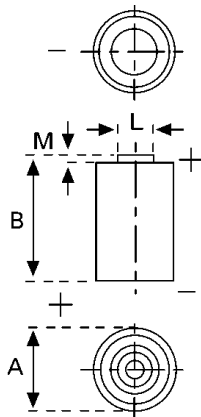

**Type Number** ..... 6205  
**Designation IEC** ..... CR 17345  
**System** ..... Li-Manganese dioxide / Organic Electrolyte

**UL Recognition** ..... MH 13654  
**Nominal Voltage** ..... 3 V  
**Typical Capacity C** ..... 1450 mAh  
 Current 20 mA, at 20°C down to 2,0 V

**Weight (approx.)** ..... 17 g  
**Volume** ..... 7 ccm  
**Coding** ..... Date of Manufacturing Month / Year

**Temperature Ranges**

	min.	max.
Storage	-20°C	45°C
Discharge	-40°C	70°C*

**Dimensions**

	min.	max.
Diameter (A)	16,20	16,80
Height (B)	33,50	34,50
Shoulder Diameter [L]	6,00	6,60
Shoulder Height [M]	1,20	1,70

**Typical Capacities (at 20°C)**

Discharge Type	Discharge Current	End Voltage:	2,0 V
Continuous 24h/d,7d/w	20 mA	Capacity [mAh]:	1450


\* Contact VARTA if the application is intended to be outside the range of -20°C to +60°C.

*Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your VARTA representative.*


**Data Sheet**

**Performance Data:**


• **Temperature Characteristics**

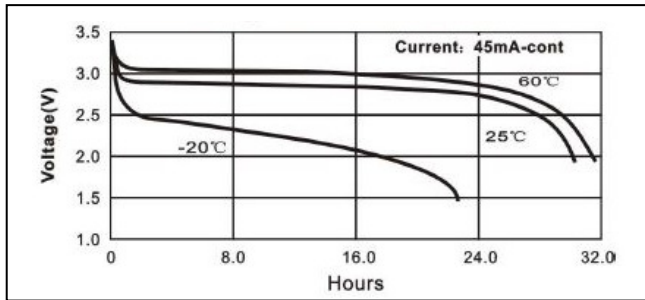

• **Pulse discharge characteristics**

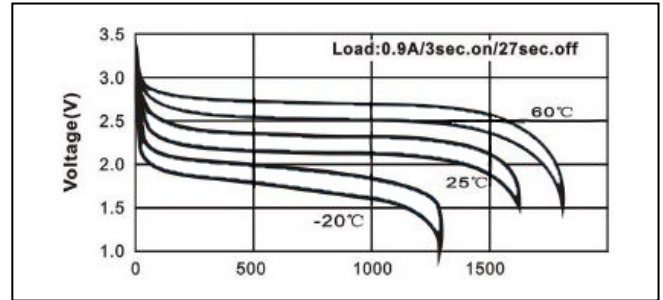

• **Discharge Characteristics**

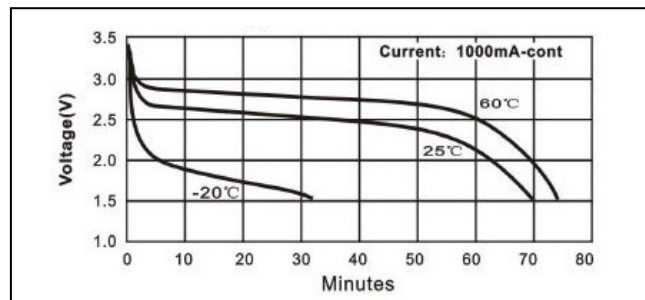

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life\* > 10 years

\* depending on environmental condition and energy consumption

*Information and contents in this data sheet are for reference purpose only.  
They do not constitute any warranty or representation and are subject to change without notice.  
For most current information and further details, please contact your VARTA representative.*