



FEATURES

DIRECTLY REPLACES STANDARD INCANDESCENTS

- LONG LIFE / 100,000 HOURS
- SOLID STATE, HIGH SHOCK/
VIBRATION RESISTANT
- BUILT-IN CURRENT LIMITING
RESISTOR FOR DIRECT APPLI-
CATIONS FOR 2V to 240VAC
- CHOICE OF 8 COLORS
- LOW CURRENT, POWER SAVINGS
to 100 - 500% AND MORE
- USED IN PILOT LIGHTS,
INDUSTRIAL CONTROLS, LIGHTED
PUSH BUTTON SWITCHES...

REPLACES FOLLOWING INCANDESCENTS

MINIATURE BAYONET: 6MB, 12MB, 24MB, 48MB, 60MB, 120MB, 44, 47, 49, 51, 130, 137, 182, 216, 219, 239, 240, 256, 257, 293, 313, 755, 756, 757, 1302, 1445, 1819, 1929, 1832, 1847, ...

PART NO.:

B 3 1 2 7 C R 6 - 2 8 V / 3 0 - P


MODEL #	LENS / COLOR / BRIGHT	VOLTS / mAmps Typ	POLARITY
CLUSTERED LEDa T3-1/4(9mm) BAYONET: B3127 = 7 LEDs B3126 = 6 LEDs	CR7, CR6, CR5, CO5, CY5, CLY5, CG5, CPG5, CB5, CW5 SPECIALS: COPG5=BICOLOR O/PG CRPG5=BICOLOR R/PG	3126:6Vf=NO RES. REQ'D 8V/60, 12V/60, 14V/60 3127:14Vf=NO RES. REQ'D 24V/30, 28V/30, 36V/20, 48V/20, 60V/15, 120VAC/10... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR BP = BIPOLAR AC = VAC
MULTICHIP LEDa T3-1/4(9mm) BAYONET: 6 CHIP B3306, B3206, B326, BM326	CR3K, CR7, CR6, CO6, CY6, CLY6, CG6, CPG6, CB6, CW6 SPECIALS: CRPG6 = BICOLOR R/PG COPG6 = BICOLOR O/PG	4Vf,6Vf,12Vf=NO RES. REQ'D 5V/60, 6V/60, 12V/30, 14V/30, 24V/20, 28V/20, 36V/15, 48V/15, 60V/12, 120VAC/ 8 Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR BP = BIPOLAR AC = VAC
DUAL CHIP LED T3-1/4(9mm) BAYONET: B3302, B322	CR3K, CR5, CO5, CY5, CG5,	4Vf =NO RESIS. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/30, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR AC = VAC
SINGLE CHIP LED T3-1/4(9mm) BAYONET: B330, B321, B320	CR5K, CR3K, CR900, CR6, CR5, CO5, CY5, CLY5, CG5, CPG6, CPG5, CB4, CB5,	2Vf =NO RESIS. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/20, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR AC = VAC
10mm BULB LED 1 CHIP / LOW COST BAYONET: B300	CR3K, CR6, CR4, CY4, CG4, TR6, TR4, TY4, TG4	2Vf =NO RESIS. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/20, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR

SPECIALS: BICOLORS, BLINKING, INFRAREDS, RIGHT-ANGLE ILLUMINATORS...


LENS TYPE: C=CLEAR, T=TRANSLUSCENT (DIFFUSED),
COLOR CODES: R=RED, O=ORANGE, Y=AMBER YELLOW, LY=LIME YELLOW, G=GREEN,
PG=PURE GREEN, B=BLUE, W=WHITE (RED/GREEN)

BRIGHTNESS CODES: 900 = 900mcd WIDE RED, 3K = 3KmcNARROW RED, 7 = HI ULTRA RED ONLY,
6 = ULTRA, 5 = SUPER BRIGHT, 3/4 = HI EFFICIENCY


NOTE: WHEN PLACING ORDERS OR REQUESTING SAMPLES, PLEASE INDICATE INCANDESCENT LAMP
NUMBER BEING REPLACED. WHEN SELECTING THE LED COLOR, MATCH EXISTING LENS COLOR TO LED
COLOR.

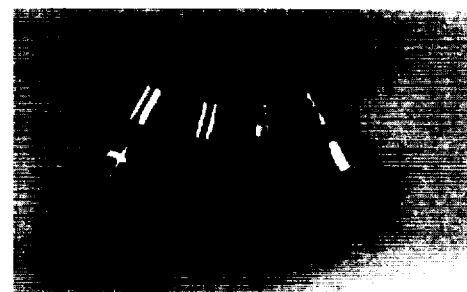


B3206, B3202
B320





B3306, B3302
B330

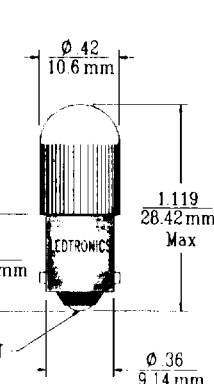


B321, B322



B3126, B3127



B300



BM326

