

# B 1060

**Features:**

- T0 metal-glass housing
- type 60 material
- high permissible power dissipation

**Application:**

- automatic street lamp switching
- burner controls



# B 1072

**Features:**

- T0-8 metal-glass housing
- type 72 material

**Application:**


- automatic street lamp switching
- burner controls

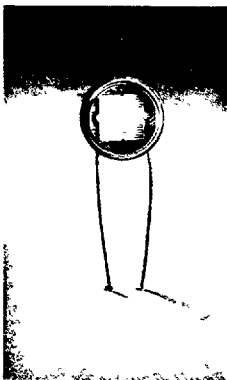


TYP	R <sub>10</sub> [kΩ]	R <sub>100</sub> [kΩ]	R <sub>01</sub> [kΩ]	R <sub>05</sub> [kΩ]	V <sub>max</sub> [V]	P <sub>max</sub> [mW]	t <sub>an</sub> [ms]	t <sub>ab</sub> [ms]	TK [%K]
B 1060 23	10	1,4	100	300	300	350	35	28	0,4
B 1072 11*	1,7	0,23	23	75	50	150	10	10	2
1072 12*	5,8	0,46	230	690	50	150	10	10	2
1072 13*	16	0,8	4 600	13 800	50	150	7	10	2
1072 14*	136	2,0	92 000	100 000	50	150	5	10	2
B 1072 21*	3,8	0,6	55	165	175	150	10	10	2
1072 22*	13,4	1,2	550	1 650	175	150	10	10	2
1072 23*	46	2,3	11 000	33 000	175	150	7	10	2
1072 24*	330	5,3	100 000	100 000	175	150	5	10	2

\*on special request and with higher quantities only

B 106023

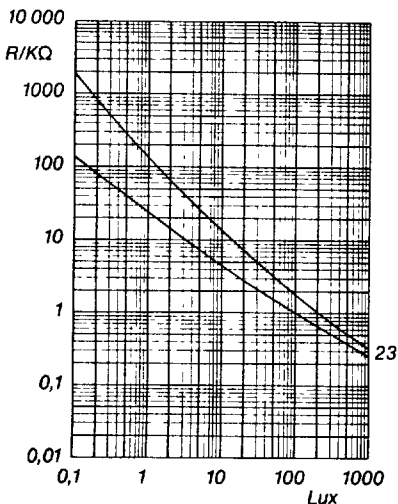

B 1072...

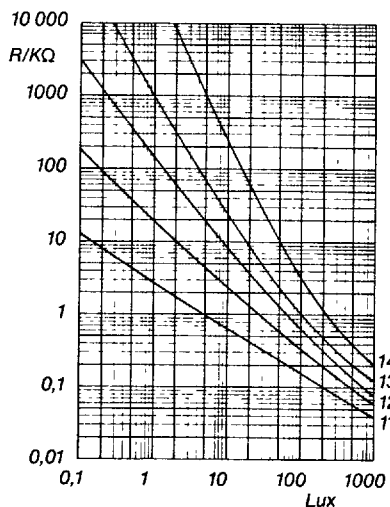

B 1072...

