

SERIES 628 5-TAPS 8 PIN H-CMOS DIGITAL DELAY MODULES

- 8 Pin DIP Auto-Insertable • H-Cmos Logic
- 5 Equally Spaced Taps

Specifications:



- Supply Voltage : 4.75 to 5.25VDC.
- Logic 1 Input Voltage : 3.2v
- Logic 0 Input Voltage : 0.9v
- Logic 1 Output Voltage : 4.5v
- Logic 0 Output Voltage : 0.1v
- Input Current : 1μA Max
- Supply Current : ICCH = 5mA, ICCL = 20μA
- Fan-Out : 10 LSTTL Loads Min
- Rise-Time : 8NS TYP (measured from 0.8v to 2.0v)
- Operating Temp Range : 0°C to 70°C
- Temp Coefficient : 300 PPM/°C



Electrical Specifications at 25°C (Measured with no Loads on Taps)

Part Number	Total Delay Nanosecond (1)	Tap To Tap Delay NSEC (1)
628-4*	4±1	1±0.5
628-5*	5±1	1.2±0.5
628-6*	6±1	1.5±0.5
628-8*	8±2	2±0.5
628-10*	10±2	2.5±0.5
628-12*	12±2	3±0.5
628-16*	16±2	4±0.6
628-25	25±2	5±0.8
628-30	30±2	6±1
628-35	35±2	7±1
628-40	40±2	8±1
628-45	45±2.2	9±1
628-50	50±2.5	10±2
628-60	60±3	12±2
628-75	75±3.5	15±2
628-100	100±5.0	20±2
628-125	125±5.5	25±2
628-150	150±6.0	30±3
628-175	175±8.7	35±3.5
628-200	200±10	40±4
628-250	250±12.5	50±5

Note: (1) Measured at 1.5v level leading edge.
*Time Delay measured with respect to 1st Tap.

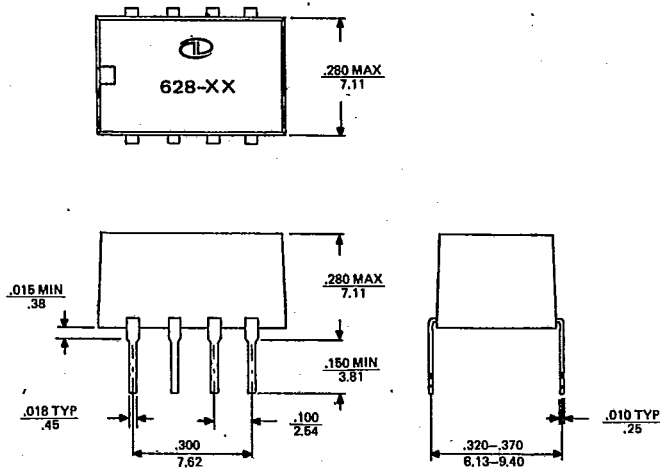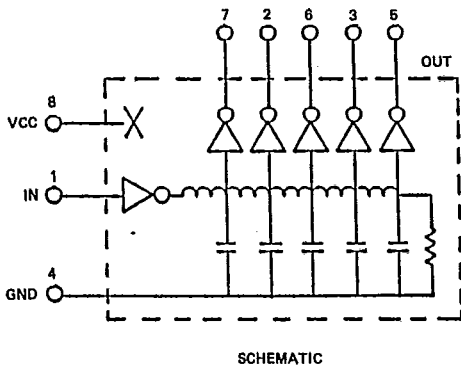

INCHES .XXX ± .010
MILLIMETERS .XX ± .25