

NOTES:

① MAT'L: COPPER

PLATING: ELECTRO-TIN (.0003 MIN.)


② BRAZED SEAM

STUD SIZES: (.005)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390
209 = .209

"UL" LISTING *E32244
"CSA" LISTING *18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

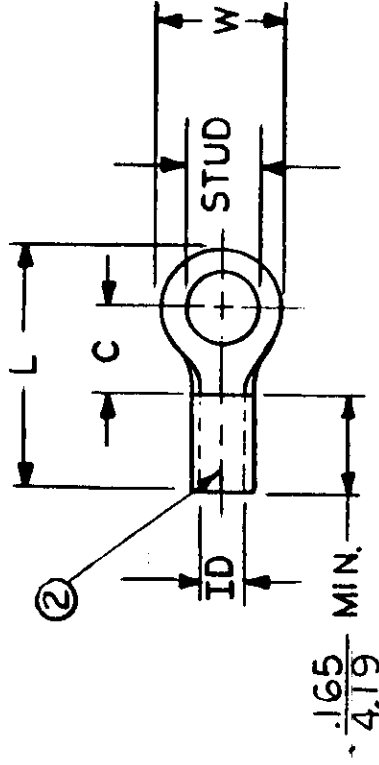

WIRE SIZE: 22-18 AWG
25-1.5 MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS	
AA-320 -	$\frac{.225}{5.72}$	$\frac{.157}{3.99}$	$\frac{.484}{12.29}$	$\frac{.062}{1.57}$	02, 04, 06	$\frac{.028 \pm .001}{.71}$	
AA-321 -	$\frac{.312}{7.93}$	$\frac{.270}{6.86}$	$\frac{.641}{16.28}$	$\frac{.062}{1.57}$	06, 08, 10, 209	$\frac{.028 \pm .001}{.71}$	
AA-322 -	$\frac{.467}{11.86}$	$\frac{.386}{9.80}$	$\frac{.835}{21.21}$	$\frac{.062}{1.57}$	10, 14, 56	$\frac{.028 \pm .001}{.71}$	
AA-326 -	$\frac{.534}{13.56}$	$\frac{.552}{14.02}$	$\frac{1.034}{26.26}$	$\frac{.054}{1.37}$	10, 14, 56, 38	$\frac{.031 \pm .001}{.79}$	
AA-332 -	$\frac{.254}{6.45}$	$\frac{.240}{6.10}$	$\frac{.582}{14.78}$	$\frac{.062}{1.57}$	04, 06, 08	$\frac{.028 \pm .001}{.71}$	
REFERENCE SCALE: NTS DATE TITLE: RING TONGUE TERMINAL VERSAKRIMP 300-SERIES							ETC INCORPORATED
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED FRAC. DEC. ANG. ± =							DWG. NO. A CUSTOMER DWG.