



FEATURES

- * High Speed Switching
- * Low Saturation Voltage
: $V_{CE(sat)} = 1.95 \text{ V (@ } I_c=6.5\text{A)}$
- * High Input Impedance

APPLICATIONS

- * AC & DC Motor controls
- * General Purpose Inverters
- * Robotics , Servo Controls
- * Power Supply
- * Lamp Ballast



2

ABSOLUTE MAXIMUM RATINGS

Symbol	Characteristics	Rating	Units
V_{CES}	Collector-Emitter Voltage	600	V
V_{GES}	Gate-Emitter Voltage	± 20	V
I_c	Collector Current @ $T_c = 25^\circ\text{C}$	13	A
	Collector Current @ $T_c = 100^\circ\text{C}$	6.5	A
$I_{CM(1)}$	Pulsed Collector Current	52	A
P_c	Maximum Power Dissipation @ $T_c = 25^\circ\text{C}$	60	W
	Maximum Power Dissipation @ $T_c = 100^\circ\text{C}$	25	W
T_j	Operating Junction Temperature	-55 ~ 150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55 ~ 150	$^\circ\text{C}$
T_L	Maximum Lead Temp. For Soldering Purposes, $\frac{1}{8}$ " from case for 5 seconds	300	$^\circ\text{C}$

Notes:(1) Repetitive rating : Pulse width limited by max. junction temperature

ELECTRICAL CHARACTERISTICS

(T_c=25 °C, Unless Otherwise Specified)

Symbol	Characteristics	Test Conditions	Min	Typ	Max	Units
BV _{CES}	C - E Breakdown Voltage	V _{GE} = 0V, I _C = 250 μA	600	-	-	V
ΔV _{CES} / ΔT _J	Temperature Coeff. of Breakdown Voltage	V _{GE} = 0V, I _C = 1mA	-	0.6	-	V/°C
V _{GE(th)}	G - E threshold voltage	I _C = 6.5mA, V _{CE} = V _{GE}	4.0	5.5	7.5	V
I _{CES}	Collector cutoff Current	V _{CE} = V _{CES} , V _{GE} = 0V	-	-	250	μA
I _{GES}	G - E leakage Current	V _{GE} = V _{GES} , V _{CE} = 0V	-	-	100	nA
V _{CE(sat)}	Collector to Emitter saturation voltage	I _C =6.5A, V _{GE} = 15V	-	1.95	2.6	V
		I _C =13A, V _{GE} = 15V	-	2.6	-	V
Cies	Input capacitance	V _{GE} = 0V, f = 1MHz	-	375	-	pF
Coes	Output capacitance	V _{CE} = 30V	-	36	-	pF
Cres	Reverse transfer capacitance		-	13	-	pF
td(on)	Turn on delay time	V _{CC} = 300V, I _C = 6.5A	-	15	-	ns
tr	Turn on rise time	V _{GE} = 15V	-	26	-	ns
td(off)	Turn off delay time	R _G = 50 Ω	-	50	80	ns
tf	Turn off fall time	Inductive Load	-	110	220	ns
Eon	Turn on Switching Loss		-	0.1	-	mJ
Eoff	Turn off Switching Loss		-	0.1	-	mJ
Ets	Total Switching Loss		-	0.2	0.3	mJ
Qg	Total Gate Charge	V _{CC} = 300V	-	25	37	nC
Qge	Gate-Emitter Charge	V _{GE} = 15V	-	7	11	nC
Qgc	Gate-Collector Charge	I _C = 6.5A	-	8	12	nC
Le	Internal Emitter Inductance	Measured 5mm from PKG	-	7.5	-	nH

THERMAL RESISTANCE

Symbol	Characteristics	Min	Typ	Max	Units
$R_{\theta JC}$	Junction-to-Case	-	-	2.0	$^{\circ}C/W$
$R_{\theta JA}$	Junction-to-Case	-	-	80	$^{\circ}C/W$
$R_{\theta CS}$	Case-to-Sink	-	0.5	-	$^{\circ}C/W$

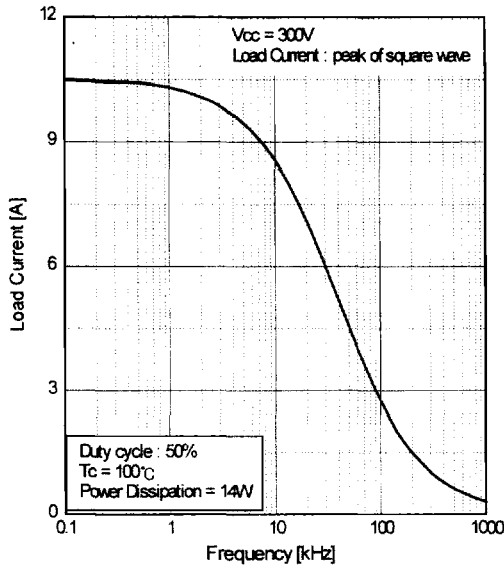


Fig.1 Typical Load Current vs. Frequency

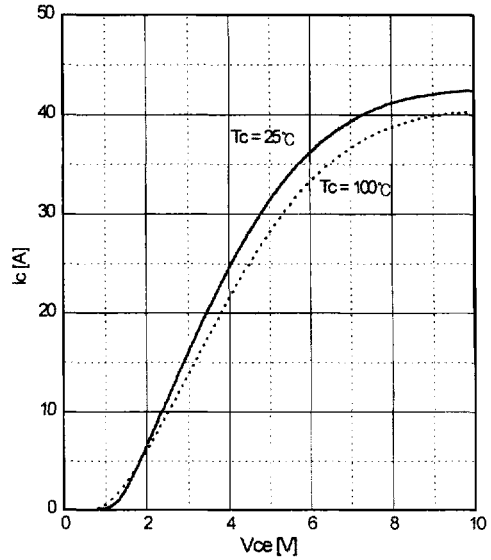


Fig.2 Typical Output Characteristics

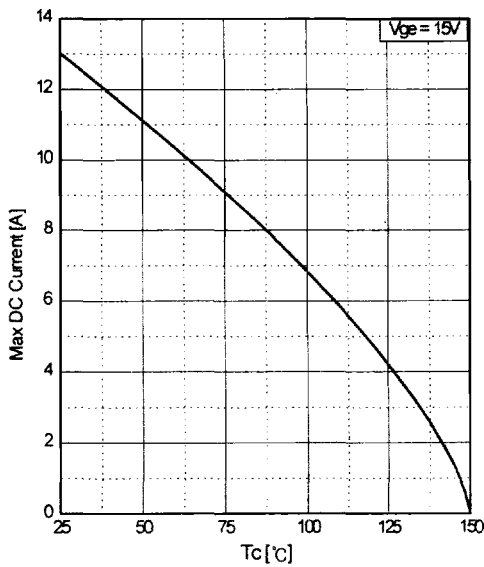


Fig.3 Maximum Collector Current vs. Case Temperature


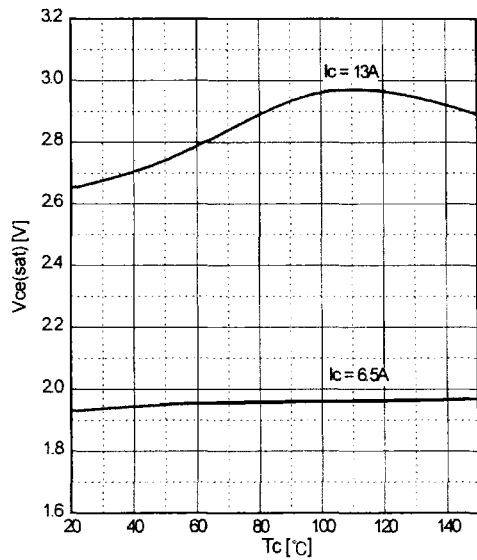


Fig.4 Collector to Emitter Voltage vs. Case Temperature

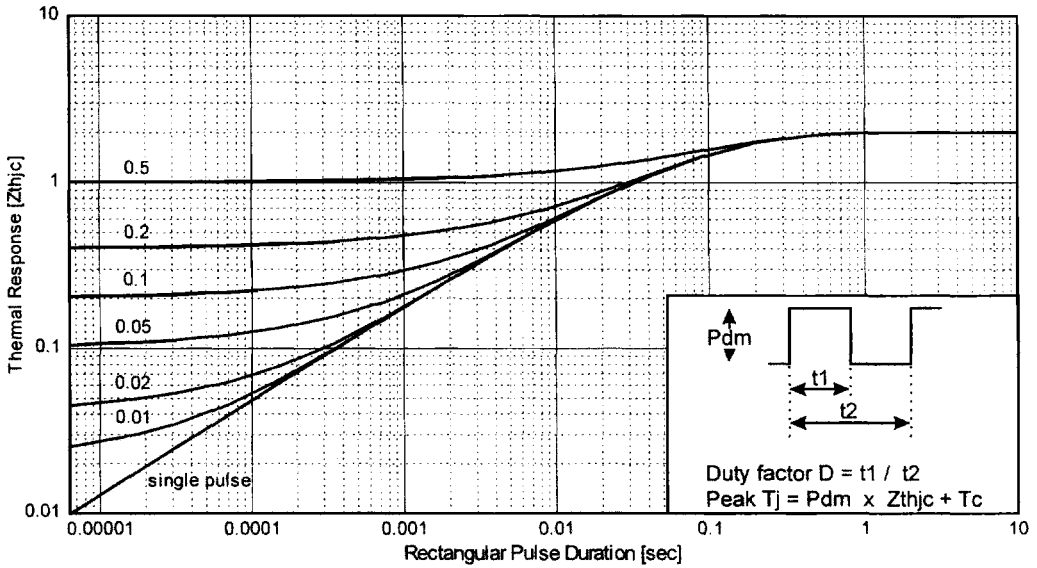

2

Fig.5 Maximum Effective Transient Thermal Impedance, Junction to Case

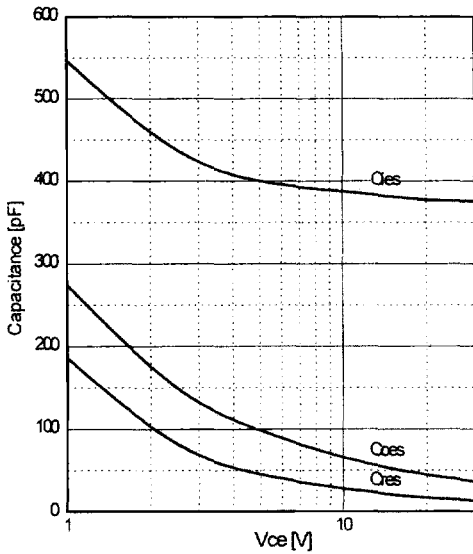


Fig.6 Typical Capacitance vs. Collector to Emitter Voltage

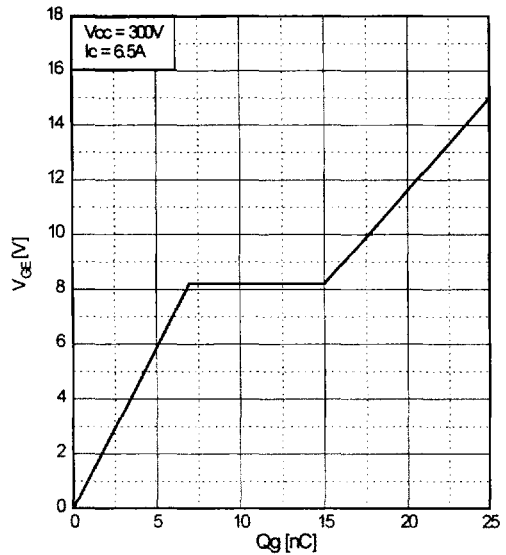


Fig.7 Typical Gate Charge vs. Gate to Emitter Voltage

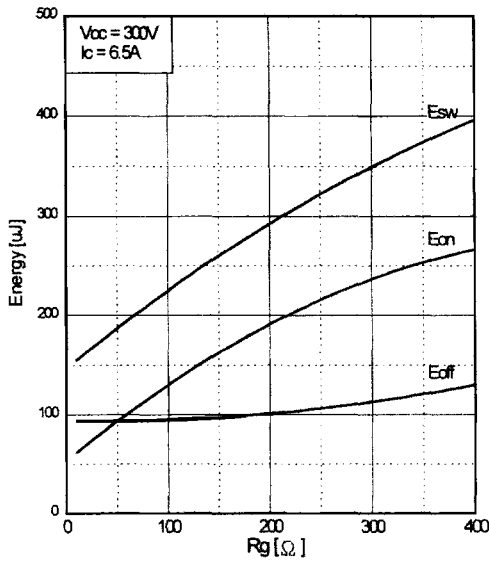


Fig.8 Typical Switching Loss vs. Gate Resistance

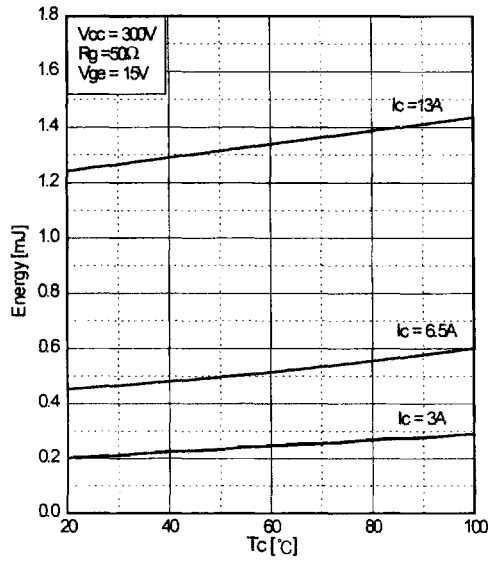


Fig.9 Typical Switching Loss vs. Case Temperature

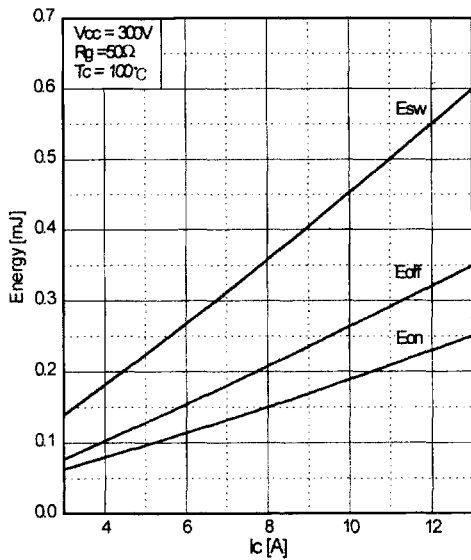


Fig.10 Typical Switching loss vs. Collector to Emitter Current

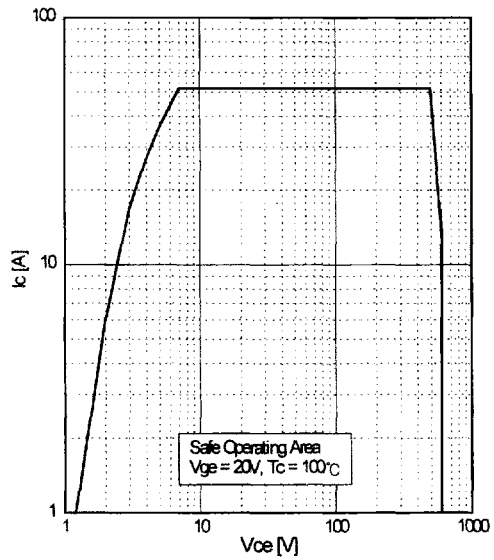


Fig.11 Turn-off SOA