




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFB-1115-4

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	11/20/98	R. RICE
B	ADJUST MOUNTING CONFIG / CHANGE DRAWING FORMAT & SPECS	CZS	6/5/03	JDMc

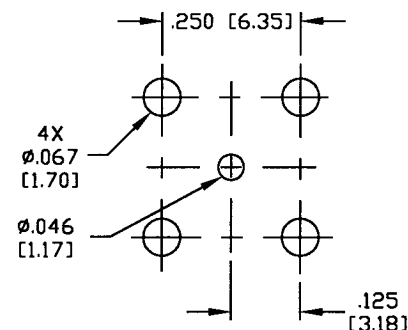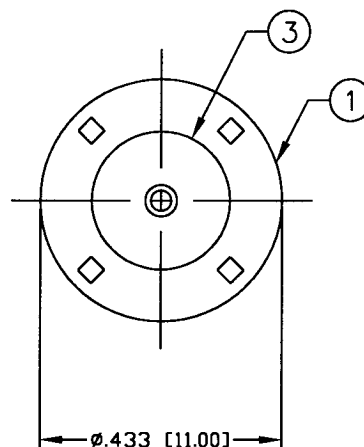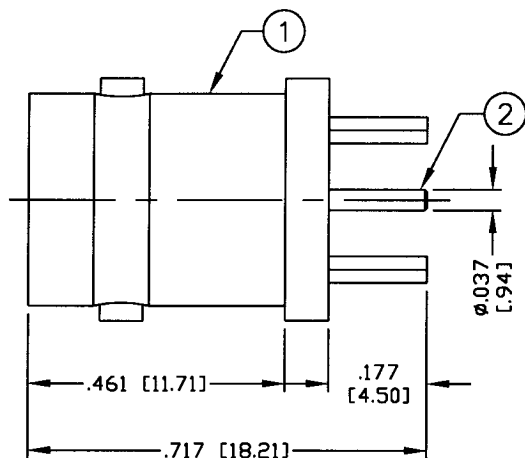

SUGGESTED MOUNTING CONFIGURATION

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0-4 GHz
WORKING VOLTAGE: 500 V rms @ sea level
TEMPERATURE RANGE: -65°C TO 165°C
INSULATION RESISTANCE: 5k M Ohms min.

1	BODY	1	BRASS	SILVER, 30μ"	008974		
2	CONTACT	1	PHOS BRONZE	GOLD, 30μ"			
3	INSULATOR	1	PTFE	---			
4	PRESS WASHER	1	BRASS	SILVER, 30μ"			
5							
6							
7							
8							
9							
10					DRAWN	6/5/03	
11					C. ZUNIGA		
12					CHECKED		JDMC 6503
13							
14					ORJ DRAWN	11/20/98	
					C. ZUNIGA		
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE	

UNLESS OTHERWISE SPECIFIED:

1. REMOVE ALL BURRS
2. BREAK ALL CORNERS & EDGES .005 R. MAX.
3. CHAMFER 1ST & LAST THREADS 45°
4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R.
6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS	DIAMETER
.xxx±.003 [.08]	.xxx±.001 [.03]
.xx±.005 [.13]	.xx±.003 [.08]

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

RFB-1115-4

BNC FEMALE VERTICAL PCB 4 LEG MOUNT

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFB-1115-4	B
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1