
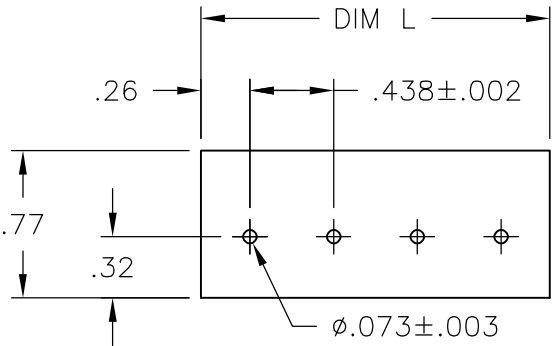
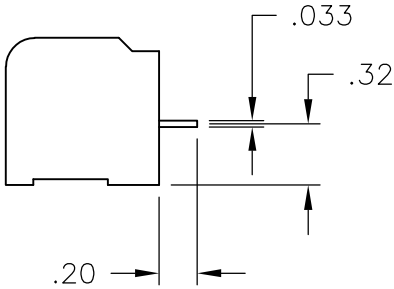
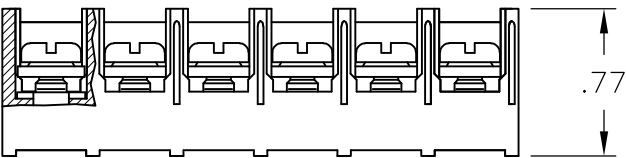


LOC	DIST	REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD
		REVISED PER ECO-08-010814			15MAY08	HMR	MZ

MATERIALS:
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
TERMINAL: BRIGHT TIN PLATED COPPER ALLOY.
SCREWS: 8-32, ZINC PLATED STEEL.


ELECTRICAL:
CURRENT RATING: 30A
VOLTAGE RATING: 600V
WIRE RANGE: 10-18 AWG (UL)
10-22 AWG (CSA)

MECHANICAL:
RECOMMENDED TORQUE: 20 IN-LB.
OPERATING TEMP.: -40°C TO +120°C.

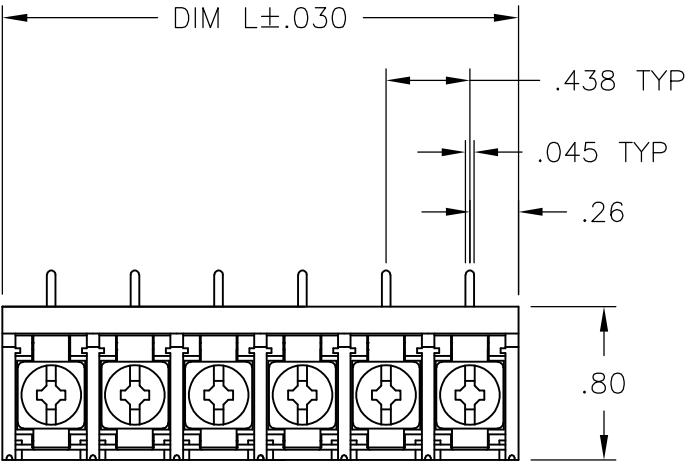

RECOMMENDED PCB LAYOUT

8.823	20	8PCR-20-006	2-1546566-0
8.385	19	8PCR-19-006	1-1546566-9
7.948	18	8PCR-18-006	1-1546566-8
7.510	17	8PCR-17-006	1-1546566-7
7.073	16	8PCR-16-006	1-1546566-6
6.635	15	8PCR-15-006	1-1546566-5
6.198	14	8PCR-14-006	796875-3
5.760	13	8PCR-13-006	1-1546566-3
5.323	12	8PCR-12-006	1-1546566-2
4.885	11	8PCR-11-006	796875-1
4.448	10	8PCR-10-006	5-1546159-4
4.010	9	8PCR-09-006	1546566-9
3.573	8	8PCR-08-006	4-1437657-3
3.135	7	8PCR-07-006	5-1546159-2
2.698	6	8PCR-06-006	3-1437657-7
2.260	5	8PCR-05-006	3-1437657-3
1.823	4	8PCR-04-006	3-1437657-1
1.385	3	8PCR-03-006	2-1437657-8
.948	2	8PCR-02-006	2-1437657-2
DIM L	NO OF POS	TE NUMBER	TE NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL	10/25/06	 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S. YODER	10/25/06	NAME 8PCR-XX-006 ASSEMBLY			
	0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 1°	APVD S. YODER	10/25/06				
		PRODUCT SPEC —					
		APPLICATION SPEC —					
SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL —		FINISH —	WEIGHT —	A3	00779	C-2-1437657-2	—
CUSTOMER DRAWING				SCALE 1:1	SHEET 1 of 1	REV C	