

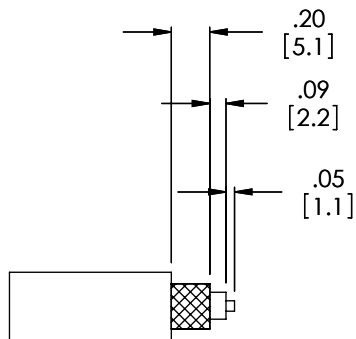


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 5010: REMODELED, REDRAWN AND NEW FORMAT	9/3/10	D.FRISIELLO

DESCRIPTION	MATERIAL	FINISH
CONNECTOR BODY	BRASS	NICKEL PLATE
INSULATOR	TEFLON	-
CENTER PIN	BRASS	GOLD PLATE
FERRULE	BRASS	NICKEL PLATE
CAP	BRASS	NICKEL PLATE

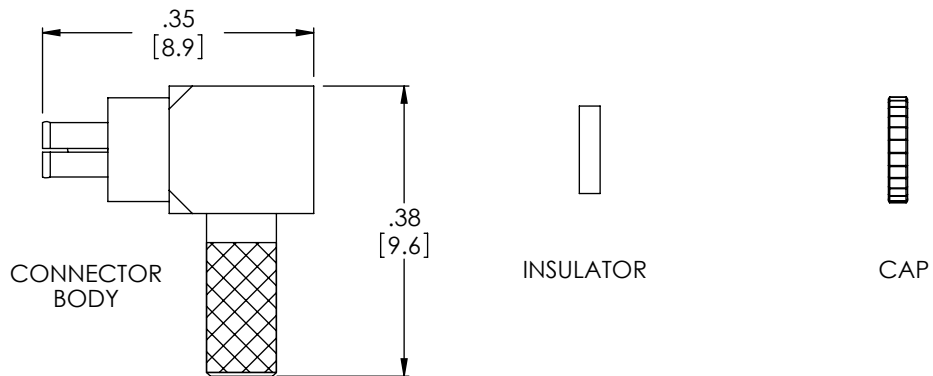

NOTES:

ELECTRICAL:
IMPEDANCE: 50 OHM
FREQUENCY RANGE: DC ~ 6GHz
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V RMS.
VOLTAGE RATING: 335 VOLTS PEAK.
CABLE RETENTION: 3 LBS PULL
APPLICATION: RG174, RG316, RG179

PACKAGE IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	8/31/10		
	CHECKED BY K.BURGNER	8/31/10	CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	8/31/10	PRODUCT DESCRIPTION MC-CARD RIGHT ANGLE CRIMP RG174/316/179	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. AMCM-1102
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: AMCM-1102.SLDDRW	REV. C
		SHEET 1 OF 1		