

**WMBCR10JH THRU WMBCR10MH**

● **FEATURES**

- \* Halogen-free type
- \* Internal structure with GPRC (glass passivated rectifier chip) inside
- \* Compliance to RoHS product
- \* Lead less chip form, no lead damage
- \* Low power loss, High efficiency
- \* High current capability
- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0

● **APPLICATION**

- \* AC/DC Power Supply
- \* Communication Equipment

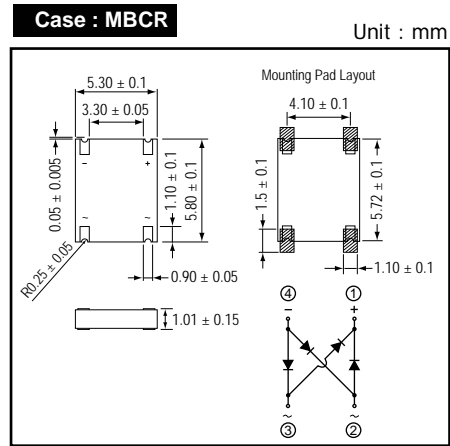
● **MECHANICAL DATA**

**Case :** Packed with FRP substrate and epoxy underfilled  
**Terminals :** Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.  
**Polarity :** Laser marking symbols  
**Weight :** 0.07 gram


● **PACKING**

- \* 5,000 pieces per 13" (330mm ± 2mm) reel
- \* 2 reels per box
- \* 5 boxes per carton

● **OUTLINE DIMENSIONS**



● **MARKING**

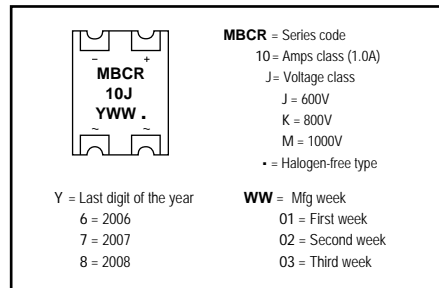





**Absolute Maximum Ratings (Ta = 25 °C)**

ITEM	Symbol	Conditions	Rating			Unit
			WMBCR10JH	WMBCR10KH	WMBCR10MH	
Repetitive peak reverse voltage	VRRM		600	800	1000	V
Average forward current	IF(AV)		1.0			A
Peak forward surge current	IFSM	8.3ms single half sine-wave	30			A
Operating junction and storage temperature Range	Tj,TSTG		-55 to +175			°C

**Electrical characteristics (Ta = 25 °C)**

ITEM	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage	VF	IF = 0.4A IF = 1.0A	-	0.87 0.95	0.90 1.00	V
Repetitive peak reverse current	IRRM	VR = Max. VRRM , Ta = 25 °C	-	0.08	2	uA
Current squared time	I <sup>2</sup> t	t < 8.3ms , Ta = 25 °C	-	3.74	-	A <sup>2</sup> s
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz	-	25	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (NOTE)	-	110	-	°C/W
	Rth(JL)	Junction to lead (NOTE)	-	15	-	

NOTES : Thermal resistance, junction to ambient, measured on PC board with 5.0 x 5.0mm (0.03mm thick) land areas.

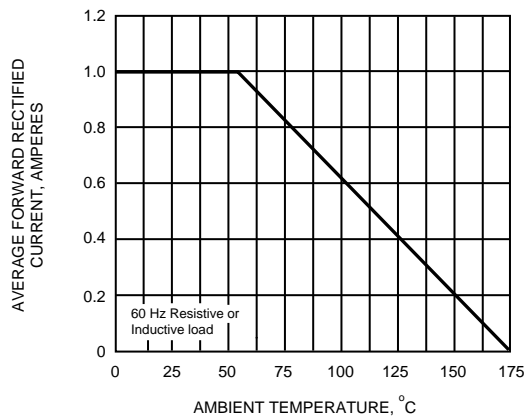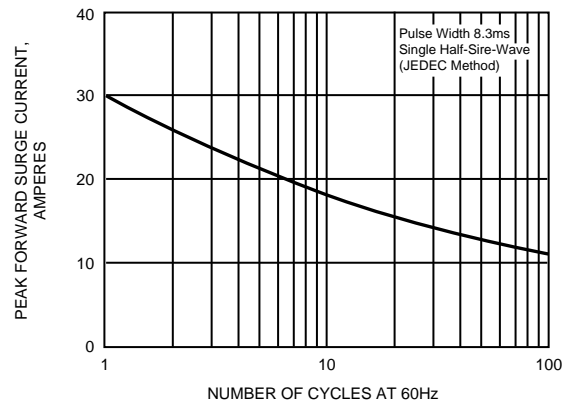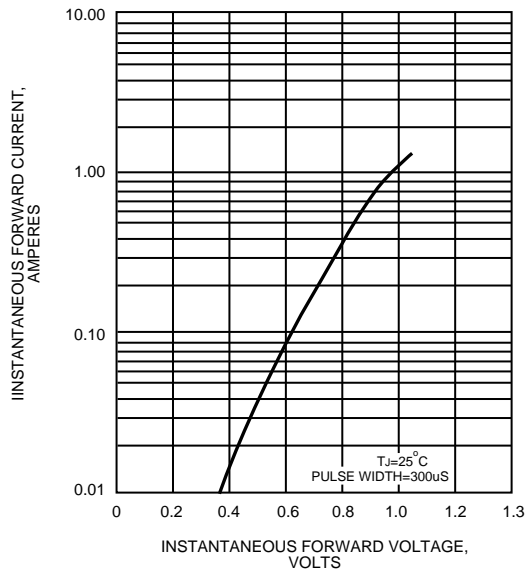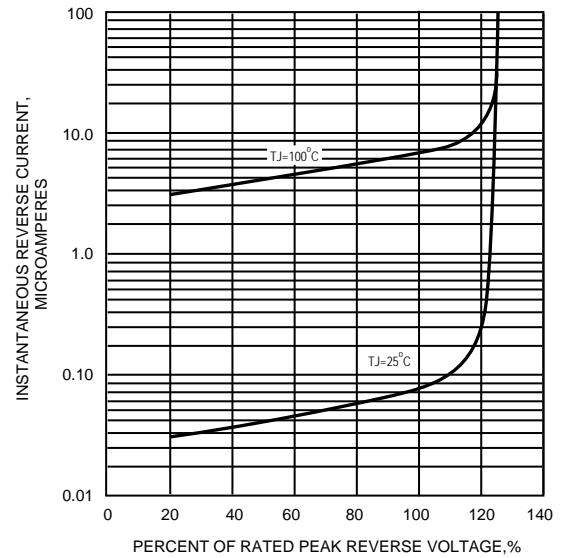**FIG.1 - FORWARD CURRENT DERATING CURVE**

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

**FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

**FIG.5 - TYPICAL JUNCTION CAPACITANCE**
